


NEW



EPOCH **G/***GLOBAL* *SERIES*

Epoch G End Mill series

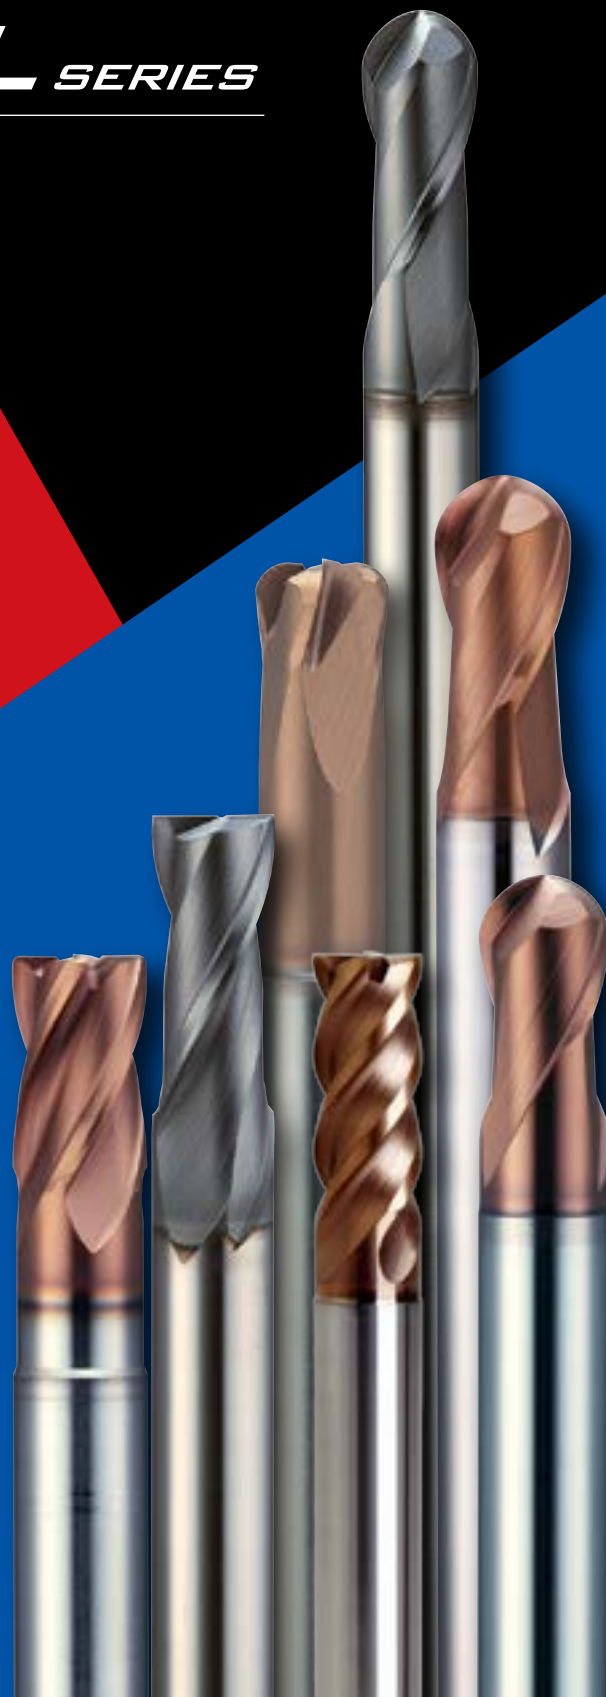










MOLDINO Tool Engineering, Ltd.

New Product News | No. H2205A-1 | 2022-08

Abundant lineup with a total of 118 items covers a broad machining range

Epoch **G** End Mill series

Line-up

| Shape | Item code | Size(mm) | No. of items | Coating | Photo |
|--------|---|-------------------------|--------------|-----------|---|
| Ball | Epoch G Ball Panacea HGOB2-PN | $\phi 0.3 \sim \phi 20$ | 19 items | PN |  |
| | Epoch G Ball -TH HGOB2-TH | $\phi 0.5 \sim \phi 20$ | 13 items | TH |  |
| | Global Forging Ball HGFB2-TH | $\phi 2 \sim \phi 12$ | 7 items | TH |  |
| Radius | Epoch G Turbo 2NT -TH HGOF2-TH | $\phi 2 \sim \phi 12$ | 8 items | TH |  |
| | Epoch G Turbo 4NT -TH HGOF4-TH | $\phi 2 \sim \phi 12$ | 8 items | TH |  |
| | Epoch G Radius 4NT -TH HGOR4-TH | $\phi 6 \sim \phi 20$ | 15 items | TH |  |
| Square | Epoch G Square 2NT Panacea HGOS2-PN | $\phi 0.2 \sim \phi 20$ | 26 items | PN |  |
| | Epoch G Square 4NT Panacea HGOS4-PN | $\phi 1 \sim \phi 20$ | 13 items | PN |  |
| | Epoch G Square 4NT -TH HGOSH4-TH | $\phi 1 \sim \phi 12$ | 9 items | TH |  |

Coating

New PaNacea Coating


- A heat-resistant coating material with excellent adhesion to the tool substrate was achieved by optimizing the Al content.
 - Exhibits with good wear resistance due to doping of the AlCr coating layer with Si.
 - Exhibits excellent cutting life for cutting materials such as plastic molds, etc. where tool seizure often occurs.
Provides the long life in cutting processing of materials such as prehardened steel, carbon steel, alloy steel, S420 type, H13, D2, etc.
 - By improving heat resistance, long life are possible for both wet cutting and dry cutting.
- Note) This product obtains less electric conductivity. Therefore, Please caution of using electri

Advanced TH Coating


- Hardness and oxidation resistance of TH Coating is further improved. Enables longer life and higher efficient when cutting high-hardness materials with 55HRC or higher. (Si nano composite coating with finer crystal particles)
- Long life for both dry cutting and wet cutting

Concept

- Ball End Mill**
 - HGOB-PN** High-efficiency machining at high cutting depths. Stable even for finishing.
 - HGOB-TH** Ideal for high-efficiency machining of high-hardness materials.

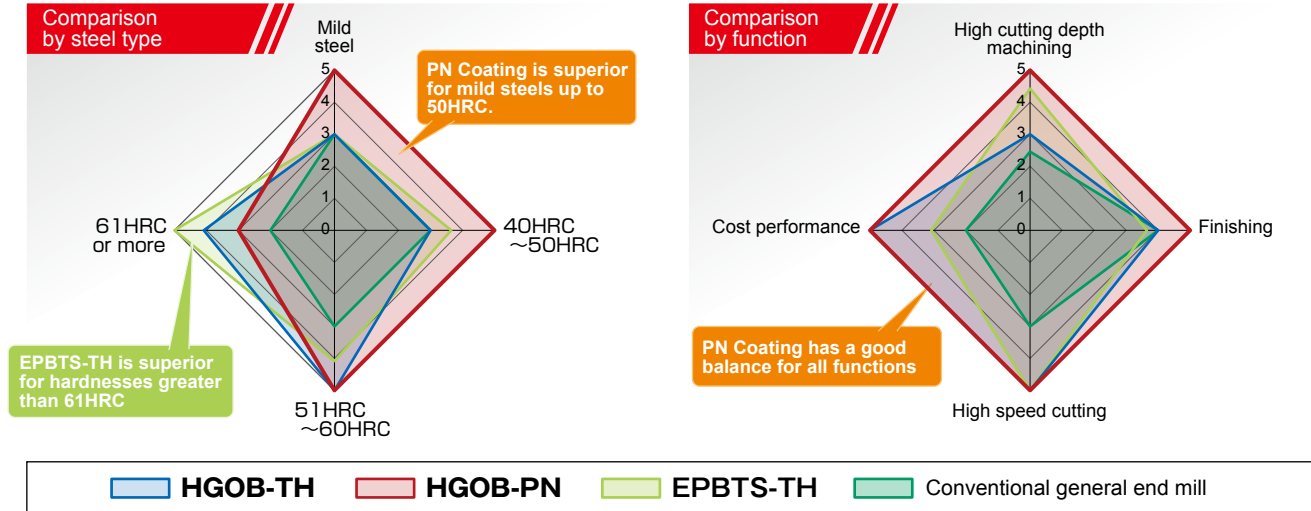

- Radius End Mill**
 - HGOF-TH** Ultra-high-efficiency contour machining can be performed. (HGOF2-TH can also perform slotting or side milling.)
 - HGOR-TH** For general-purpose machining region with focus on side milling.

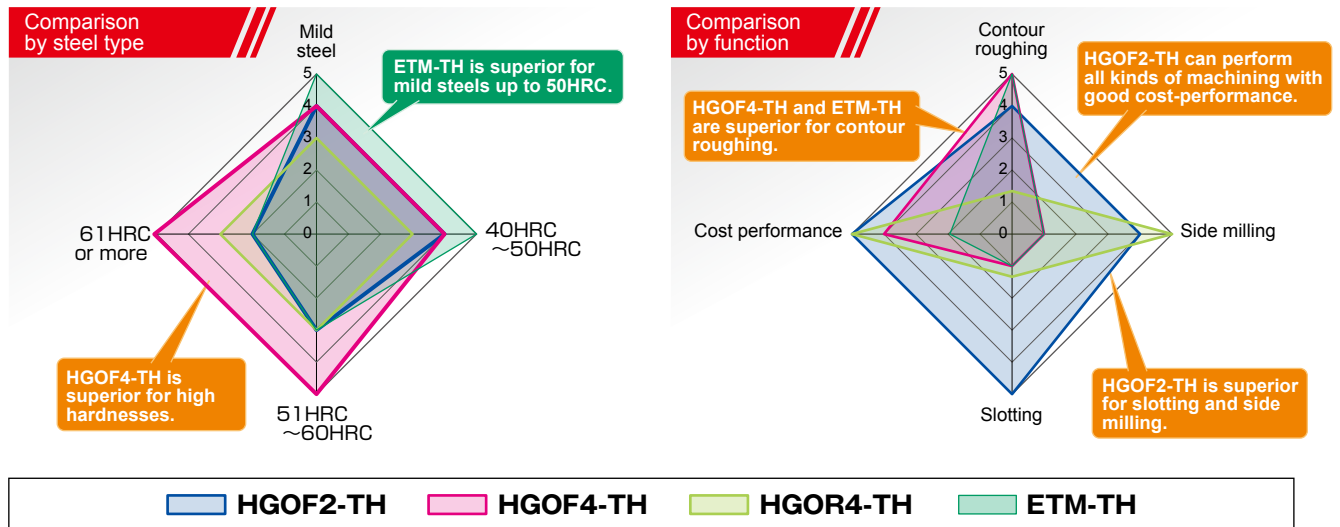

Cutting area

Newly developed PN Coating and the TH Coating with its excellent results enable high-efficiency machining for wide-ranging applications from roughing to finishing on a broad range of cutting materials.

■ Table of suitability of each coating for various cutting materials

| Coating | Low-carbon steel | Alloy steels | Pre-hardened steels | Hardened steels | | Stainless steels | Cast iron, Ductile cast iron | Non-ferric Aluminum alloy; Copper |
|---------|------------------|--------------|---------------------|-----------------|----------|------------------|------------------------------|-----------------------------------|
| | | | | ~50HRC | 51~60HRC | | | |
| PN | ○ | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| TH | | ○ | ○ | ○ | ○ | | | |

Can handle machining of plastic molds, diecast molds, press dies, or various parts.


Field data

Performance of HGOB-PN and HGOS-PN


01 Life comparison when cutting high-performance plastic mold material

Tool: Ball End Mill (R3mm×2NT)

Cutting conditions $n=15,000, 20,000\text{min}^{-1}$, $v_f=236, 315$ IPM, $a_p \times a_e = .016 \times .008$ inch, Dry, Air-blow
Work material = Prehardened Steel (40HRC)

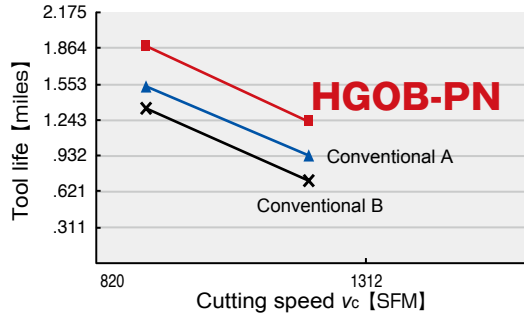

Cutting condition $n=20,000\text{min}^{-1}$, $v_f=315$ IPM
 $a_p \times a_e = .016 \times .008$ inch Cutting distance L=2.5 miles

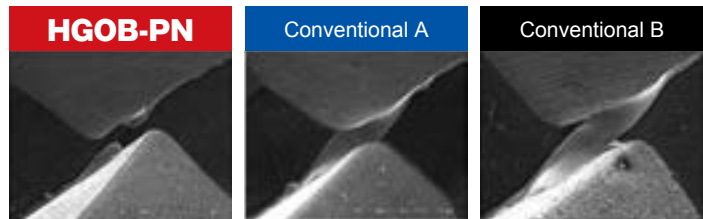


Provides stable machining in all rotation regions.


02 Comparison of machined surface grade when cutting carbon steel 1050

Tool: Ball End Mill (R1mm×2NT)

Cutting conditions $n=24,000\text{min}^{-1}$ $v_f=125$ IPM
 $a_p \times a_e = .004 \times .004$ inch
Work material =1050 (200HB)
Coolant : Dry, Wet

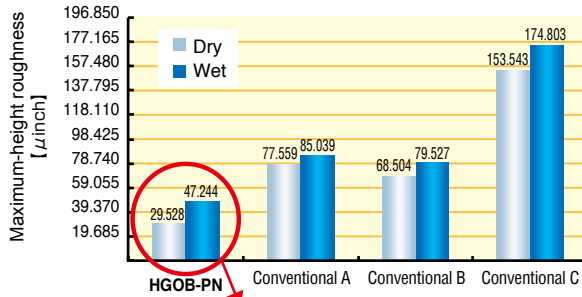

HGOB-PN is good for both dry and wet cutting

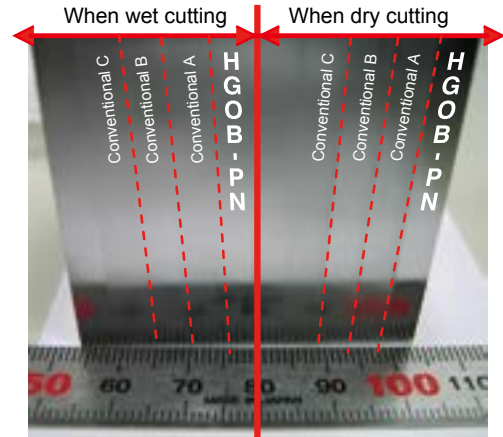


Comparison of machined surface gloss condition

03 Comparison of chipping damage when cutting hardened steel AISI 420

Tool: Ball End Mill (R3mm×2NT)

Cutting conditions $n=19,200\text{min}^{-1}$ $v_f=145$ IPM $a_p \times a_e = .028 \times .085$ inch Work material =AISI 420
Coolant : Wet Cutting distance : 1 pocketing (Cutting distance 32.81 feet)

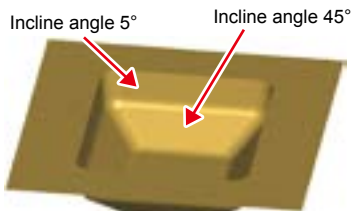

Upper : 1.378 x 1.575 inch
Bottom : .866 x .669 inch
Depth : Incline 5° (0 ~ .315 inch)
 Incline 45° (.315 ~ .551 inch)




HGOB-PN is the best for high-performance cutting.


04 Comparison of machined surface when cutting general-purpose plastic mold material 4140

Tool: Ball End Mill (R3mm×2NT) Work material : 4140 (30HRC)

| Process | Tool | Radius(mm) | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut $a_p \times a_e$ (inch) | Coolant |
|--------------------------------|--------------|------------|---------------------------------|-----------------|--------------------------------------|------------|
| Contour roughing | HGOB2060-PN | R3 | 8,000 | 76 | .020 x .047 | Air-blow |
| Contour finishing | HGOB2060-PN | R3 | 12,200 | 110 | .008 x .008 | Water base |
| Contour finishing (high-grade) | HGOB2060-PN | R3 | 12,200 | 110 | .006 x .006 | Water base |
| | Conventional | | | | | |



Comparison of machined surface roughness of R45° section in pick direction


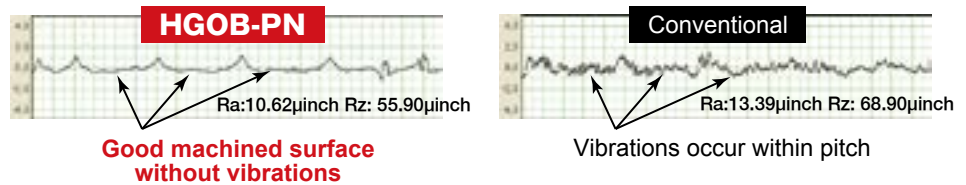


05 Side cutting surface comparison data on carbon steel 1050

Tool: Square End Mill (ϕ 6mm×2NT)

Cutting conditions ///


Work material =1050 (200HB) Cutting distance : 114.83 feet
 $n=4,700\text{min}^{-1}$ $v_f=11$ IPM $a_p \times a_e=.354 \times .024$ inch Coolant : Wet

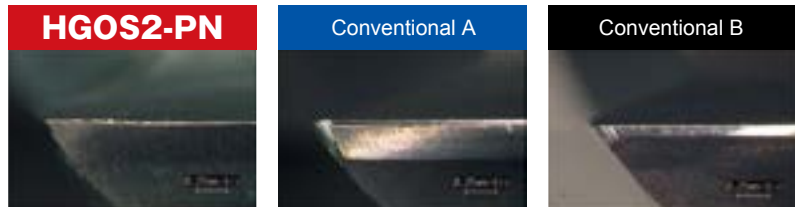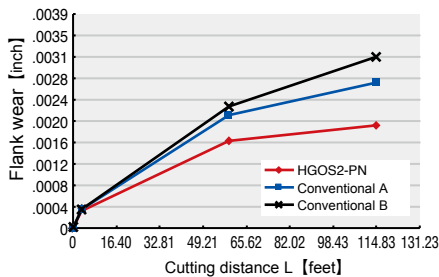

With HGOS2-PN, wear progress was the slowest and most stable.


06 Part machining data on carbon steel 1050

| Process | Machined shape | Tool | Tool dia. (mm) | Revolution (min ⁻¹) | Feed rate (IPM) | Depth of cut $a_p \times a_e$ (inch) | Coolant | Cutting distance (inch) |
|------------------|--------------------|-------------|----------------|---------------------------------|-----------------|--------------------------------------|----------|-------------------------|
| Contour roughing | Helical boring | HGOS2060-PN | ϕ 6 | 10,000 | 11.8 | .256 x .079 | Air-blow | 28.5 |
| Contour roughing | Pocketing | HGOS2060-PN | ϕ 6 | 11,000 | 25.6 | .256 x .024 | Air-blow | 111.7 |
| Edge cutting | Character slotting | HGOS2010-PN | ϕ 1 | 22,300 | 8.8 | .020 x .039 | Air-blow | 12.8 |
| Edge cutting | Slotting | HGOS2100-PN | ϕ 10 | 1,250 | 6.9 | .157 x .394 | Air-blow | 25.7 |




In addition to side surface and grooving, it can also be used in a variety of other ways.

Comparison of bottom surface roughness for slotting



Character slotting

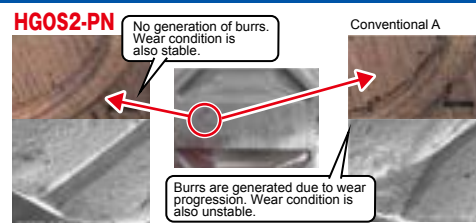

Performance of HGOB-TH


01 Direct-carving machining of cold-forged die material

Work material : D2 (60HRC), Tool : R3mm×2NT


Cutting conditions

$n=10,000\text{min}^{-1}$ ($v_c=617$ SFM) $v_f=118.1$ IPM ($f_z=.006$ IPT) $a_p \times a_e = .014 \times .043$ inch
Air-blow

Comparison of tool life

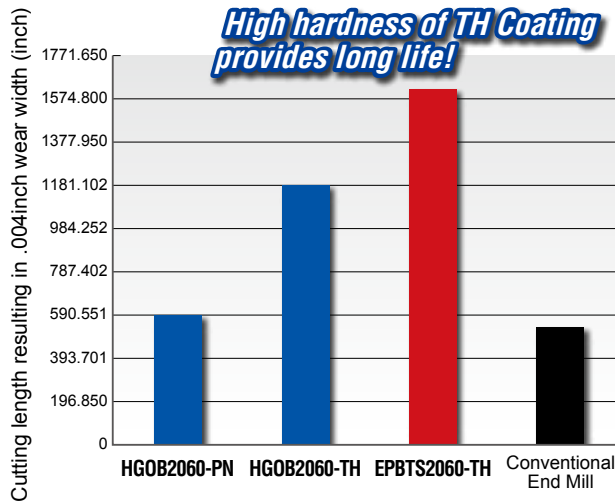

Photograph of wear after cutting 65.62 feet

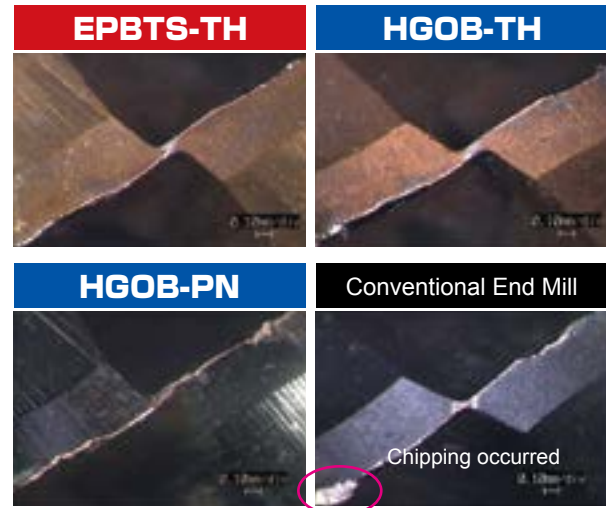


02 Direct-carving machining of hot-forged die material

Work material : H13 (45HRC), Tool : R1mm×2NT

Cutting conditions

$n=30,000\text{min}^{-1}$ ($v_c=617$ SFM) $v_f=66.9$ IPM ($f_z=.001$ IPT) $a_p \times a_e = .008 \times .024$ inch
Air-blow, Cutting distance 262 feet

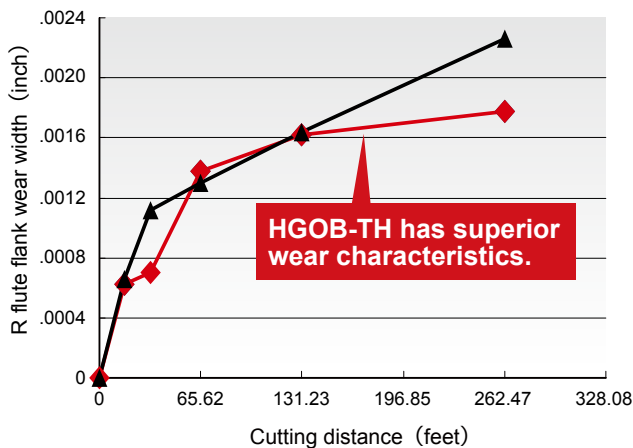


Performance of HGOF4-TH

01 Bottom machining of high-hardness materials (Feed limit evaluation)

Work material : D2 (60HRC), Tool : ϕ 10mm×R2mm HGOF4100-20-TH

Cutting conditions /// $n=1,600\text{min}^{-1}$ ($v_c=164$ SFM), v_f = below table
 $a_p \times a_e = .012 \times .012$ inch Air-blow






| V_f (IPM) | 39.4 | 47.2 | 55.1 | 63.0 | 70.9 |
|------------------------------|------------|------------|------------|------------|------------|
| f_z (IPT) | $f_z=.006$ | $f_z=.007$ | $f_z=.009$ | $f_z=.010$ | $f_z=.011$ |
| HGOF4-TH | ○ | ○ | ○ | ○ | ○ |
| Conventional radius end mill | × | | | | |

Epoch G Turbo with low cutting resistance is particularly superior for high-efficiency machining of high-hardness materials.

02 High-efficiency pocket machining (Life evaluation)

Work material : H13 (50HRC), Tool : ϕ 6mm×R1.5mm HGOF4060-15-TH

Cutting conditions /// $n=4,200\text{min}^{-1}$ ($v_c=259$ SFM) $v_f=198.4$ IPM ($f_z=.012$ IPT)
 $a_p \times a_e = .012 \times .118$ inch Air-blow Cutting time : 30min.

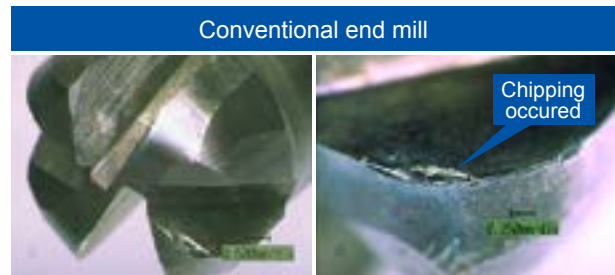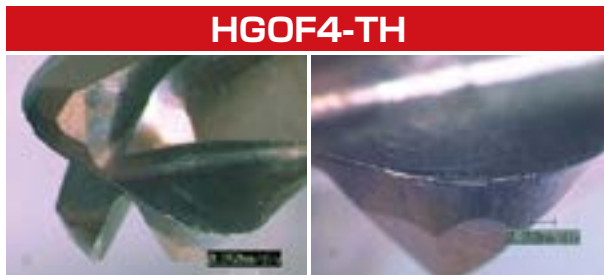


Wear is small even for high-efficiency machining.

03 High-efficiency roughing of powder metallurgy HSS (Life evaluation)

Work material : Powdered High-speed Tool Steel (67HRC), Tool : ϕ 4mm×R1mm, HGOF4040-10-TH

Cutting conditions /// $n=4,800\text{min}^{-1}$ ($v_c=197$ SFM) $v_f=198.4$ IPM ($f_z=.002$ IPT)
 $a_p \times a_e = .006 \times .067$ inch Mist-blow,



High-efficiency roughing of powder metallurgy HSS. Machining time: Approx. 18 min.


**Wear width: .002 inch
Cutting length: 65.6 feet**

Performance of HGOF2-TH

01 Bottom cutting (Feed limit evaluation)

Work material : Equivalent to AISI 420 (52HRC), Tool : $\phi 6\text{mm} \times R1.5\text{mm}$ HGOF2060-15-TH

Cutting conditions $n=2,700\text{min}^{-1}$ ($v_c=164$ SFM) $v_f=\text{below table}$
 $\text{OH}=.945$ inches (4D)、 $a_p \times a_e=.012 \times .059$ inch Air-blow



| V_f (IPM) | 19.7 | 39.4 | 59.1 | 78.7 | 98.4 | 118.1 | 137.8 |
|--|------------|------------|------------|------------|------------|------------|------------|
| f_z (IPT) | $f_z=.004$ | $f_z=.007$ | $f_z=.011$ | $f_z=.014$ | $f_z=.018$ | $f_z=.022$ | $f_z=.026$ |
| HGOF2060-15-TH | ○ | ○ | ○ | ○ | ○ | ○ | ○ |
| Conventional general 2flutes radius end mill | ○ | Chipping | | | | | |


More than 7-times the machining efficiency.

Epoch G Turbo enables machining at far higher feed rates.

02 Bottom cutting (Life evaluation)

Work material : Equivalent to AISI 420 (52HRC), Tool : HGOF2060-15-TH

Cutting conditions $n=2,700\text{min}^{-1}$ ($v_c=164$ SFM) $v_f=63.8$ IPM ($f_z=.012$ IPT) $\text{OH}=.945$ inches (4D)
 $a_p \times a_e=.012 \times .059$ inch Cutting time : 94min. Air-blow

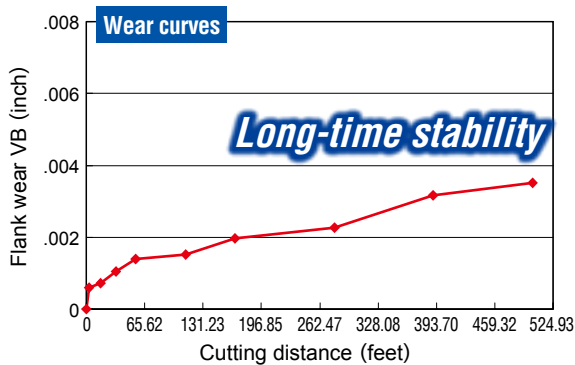

After cutting distance of 508.53 feet




Interrupted cutting possible

03 Slotting (High-efficiency slotting)

Work material : Equivalent to AISI 420 (52HRC), Tool : $\phi 6\text{mm} \times R1.5\text{mm}$ HGOF2060-15-TH

Cutting conditions $n=3,200\text{min}^{-1}$ ($v_c=197$ SFM) $v_f=9.8$ IPM ($f_z=.002$ IPT)、
 $\text{OH}=.945$ inches (4D) $a_p \times a_e=.236 \times .236$ inch Air-blow





Performance of HGOR-TH

01 Comparison data for side milling of pre-hardened steel material for plastic mold

Work material : Pre-hardened steel (40HRC), Tool : $\phi 6\text{mm} \times 4\text{NT}$


Cutting conditions $n=4,250\text{min}^{-1}$ ($v_c=262$ SFM) $v_f=20.1$ IPM ($f_z=.001$ IPT)
 $a_p \times a_e = .236 \times .024$ inch Air-blow

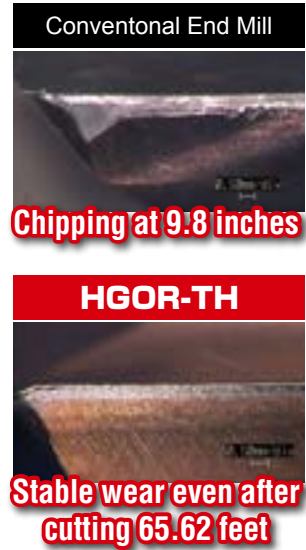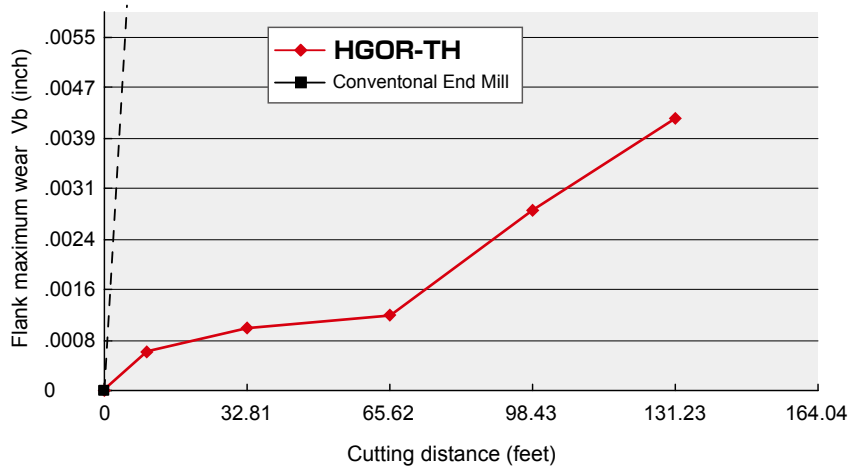

02 Comparison data for side milling of NO.35 B cast-iron material

Work material : NO.35 B, Tool : $\phi 6\text{mm} \times 4\text{NT}$

Cutting conditions $n=9,550\text{min}^{-1}$ ($v_c=614$ SFM) $v_f=90.2$ IPM ($f_z=.002$ IPT)
 $a_p \times a_e = .118 \times .197$ inch Air-blow

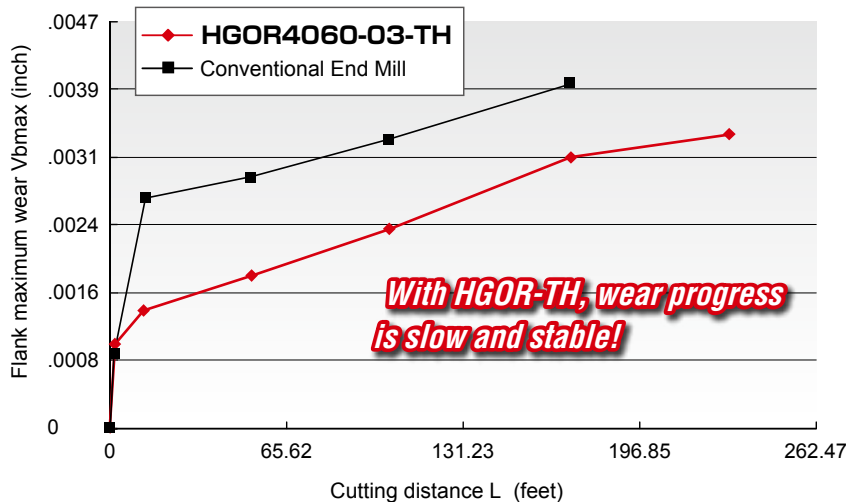

Photograph of wear after cutting 98.43 feet



With HGOR-TH, wear progress is slow and stable!

Line Up



Epoch G Ball

HGOB-PN Panacea

RE accuracy : Right table



Tolerance on shank : h5



| | | (mm) | |
|--------|-------------|------|--|
| RE | RE accuracy | | |
| 0.15~6 | ±0.005 | | |
| 8~10 | ±0.01 | | |

HGOB2○○○○(-○)-PN



| Item code | Stock | Size (mm) | | | | | | | No. of flutes | Type | Coating |
|---------------|-------|----------------|--------------|-------------------|----------------------|--------------|-------------------|-------------------|---------------|------|---------|
| | | Ball radius RE | Tool dia. DC | Flute length APMX | Under neck length LU | Neck dia. DN | Overall length LF | Shank dia. DCONMS | | | |
| HGOB2003-PN | ● | 0.15 | 0.3 | 0.6 | 0.9 | — | 50 | 4 | 2 | A | PN |
| HGOB2004-PN | ● | 0.2 | 0.4 | 0.8 | 1.1 | — | 50 | 4 | 2 | A | PN |
| HGOB2005-PN | ● | 0.25 | 0.5 | 1 | 1.3 | — | 50 | 4 | 2 | A | PN |
| HGOB2006-PN | ● | 0.3 | 0.6 | 1.2 | 1.5 | — | 50 | 4 | 2 | A | PN |
| HGOB2008-PN | ● | 0.4 | 0.8 | 1.6 | 1.9 | — | 50 | 4 | 2 | A | PN |
| HGOB2010-PN | ● | 0.5 | 1 | 2.5 | 3.5 | — | 50 | 4 | 2 | A | PN |
| HGOB2015-PN | ● | 0.75 | 1.5 | 4 | 5 | — | 50 | 4 | 2 | A | PN |
| HGOB2020-PN | ● | 1 | 2 | 5 | 6 | — | 50 | 6 | 2 | A | PN |
| HGOB2025-PN | ● | 1.25 | 2.5 | 7 | 8 | — | 50 | 6 | 2 | A | PN |
| HGOB2030-PN | ● | 1.5 | 3 | 8 | 9 | — | 70 | 6 | 2 | A | PN |
| HGOB2040-4-PN | ● | 2 | 4 | 8 | — | — | 70 | 4 | 2 | B | PN |
| HGOB2040-PN | ● | 2 | 4 | 8 | 9 | — | 70 | 6 | 2 | A | PN |
| HGOB2050-PN | ● | 2.5 | 5 | 10 | 11 | — | 80 | 6 | 2 | A | PN |
| HGOB2060-PN | ● | 3 | 6 | 12 | — | — | 90 | 6 | 2 | B | PN |
| HGOB2080-PN | ● | 4 | 8 | 14 | — | — | 100 | 8 | 2 | B | PN |
| HGOB2100-PN | ● | 5 | 10 | 18 | — | — | 100 | 10 | 2 | B | PN |
| HGOB2120-PN | ● | 6 | 12 | 22 | — | — | 110 | 12 | 2 | B | PN |
| HGOB2160-PN | ● | 8 | 16 | 30 | — | — | 140 | 16 | 2 | B | PN |
| HGOB2200-PN | ● | 10 | 20 | 38 | — | — | 160 | 20 | 2 | B | PN |

HGOB-TH

RE accuracy : Right table



Tolerance on shank : h5



| | | (mm) | |
|--------|-------------|------|--|
| RE | RE accuracy | | |
| 0.15~6 | ±0.005 | | |
| 8~10 | ±0.01 | | |

R8 and R10 don't have LU and DN

HGOB2○○○○-TH


| Item code | Stock | Size (mm) | | | | | | | No. of flutes | Type | Coating |
|-------------|-------|----------------|--------------|-------------------|----------------------|--------------|-------------------|-------------------|---------------|------|---------|
| | | Ball radius RE | Tool dia. DC | Flute length APMX | Under neck length LU | Neck dia. DN | Overall length LF | Shank dia. DCONMS | | | |
| HGOB2005-TH | ● | 0.25 | 0.5 | 0.5 | 1.25 | 0.47 | 40 | 4 | 2 | A | TH |
| HGOB2010-TH | ● | 0.5 | 1 | 1 | 2.5 | 0.95 | 40 | 4 | 2 | A | TH |
| HGOB2015-TH | ● | 0.75 | 1.5 | 1.5 | 3.75 | 1.45 | 40 | 4 | 2 | A | TH |
| HGOB2020-TH | ● | 1 | 2 | 2 | 5 | 1.95 | 40 | 6 | 2 | A | TH |
| HGOB2030-TH | ● | 1.5 | 3 | 3 | 7.5 | 2.9 | 45 | 6 | 2 | A | TH |
| HGOB2040-TH | ● | 2 | 4 | 4 | 10 | 3.9 | 45 | 6 | 2 | A | TH |
| HGOB2050-TH | ● | 2.5 | 5 | 5 | 12.5 | 4.9 | 50 | 6 | 2 | A | TH |
| HGOB2060-TH | ● | 3 | 6 | 6 | 15 | 5.9 | 50 | 6 | 2 | B | TH |
| HGOB2080-TH | ● | 4 | 8 | 8 | 20 | 7.9 | 60 | 8 | 2 | B | TH |
| HGOB2100-TH | ● | 5 | 10 | 10 | 25 | 9.9 | 65 | 10 | 2 | B | TH |
| HGOB2120-TH | ● | 6 | 12 | 12 | 30 | 11.9 | 75 | 12 | 2 | B | TH |
| HGOB2160-TH | ● | 8 | 16 | 16 | — | — | 140 | 16 | 2 | B | TH |
| HGOB2200-TH | ● | 10 | 20 | 20 | — | — | 160 | 20 | 2 | B | TH |

● : Inventory maintained in US

Special strong geometry provides both rigidity and good cutting performance.

Features of HGFB-TH

Enables high-efficient machining with increased cutting depth and feed rate. Ideal for high-efficient machining from roughing to finishing of 35HRC or higher materials.

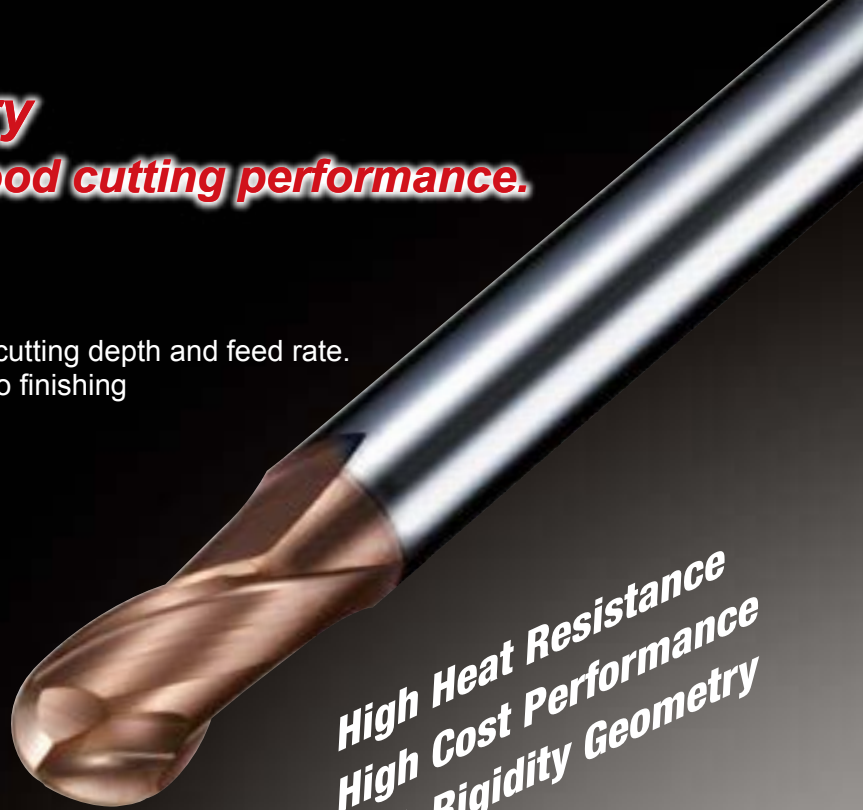

High Heat Resistance
High Cost Performance
High Rigidity Geometry

TH Coating

- Exhibits amazing performance when cutting high-hardness materials (35HRC or higher). Double the tool life and more than double the machining efficiency. Cold-worked die steel, HSS, tool steel, composite materials, carbide alloys, etc.
- Long life for both dry cutting and wet cutting.


Global Forging Ball

HGFB-TH

RE accuracy : $\pm 0.01\text{mm}$ Helix angle : 30°



Tolerance on shank : h5

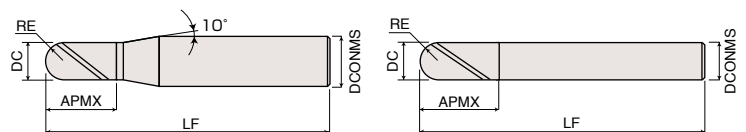

A type

B type

HGFB2-TH

| Item Code | Stock | Size (mm) | | | | | No. of flutes | Type | Coating |
|-------------|-------|-------------|-----------|--------------|----------------|------------|---------------|------|---------|
| | | Ball radius | Tool dia. | Flute length | Overall length | Shank dia. | | | |
| | | RE | DC | APMX | LF | DCONMS | | | |
| HGFB2020-TH | ● | 1 | 2 | 3 | 50 | 6 | 2 | A | TH |
| HGFB2030-TH | ● | 1.5 | 3 | 4.5 | 70 | 6 | 2 | A | TH |
| HGFB2040-TH | ● | 2 | 4 | 6 | 70 | 6 | 2 | A | TH |
| HGFB2060-TH | ● | 3 | 6 | 9 | 90 | 6 | 2 | B | TH |
| HGFB2080-TH | ● | 4 | 8 | 12 | 100 | 8 | 2 | B | TH |
| HGFB2100-TH | ● | 5 | 10 | 15 | 100 | 10 | 2 | B | TH |
| HGFB2120-TH | ● | 6 | 12 | 18 | 110 | 12 | 2 | B | TH |

Line Up

Epoch G Turbo

HGOF-TH


2 flutes



4 flutes



Tolerance on dia. : $\begin{matrix} 0 \\ -0.03\text{mm} \end{matrix}$

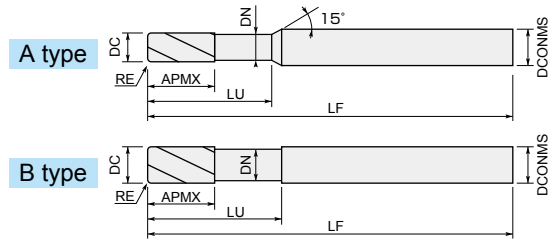

HGOF2-TH

| Item code | Stock | Size (mm) | | | | | | | No. of flutes | Type | Coating |
|----------------|-------|-----------------|---------------------|----------------------|-------------------------|-----------------|----------------------|----------------------|---------------|------|---------|
| | | Tool dia. DC | Corner radius RE | Flute length APMX | Under neck length LU | Neck dia. DN | Overall length LF | Shank dia. DCONMS | | | |
| HGOF2020-05-TH | ★ | 2 | 0.5 | 3 | 6 | 1.9 | 60 | 6 | 2 | A | TH |
| HGOF2030-08-TH | ★ | 3 | 0.8 | 4.5 | 9 | 2.9 | 60 | 6 | 2 | A | TH |
| HGOF2040-10-TH | ★ | 4 | 1 | 6 | 12 | 3.8 | 60 | 6 | 2 | A | TH |
| HGOF2050-12-TH | ★ | 5 | 1.2 | 7.5 | 15 | 4.7 | 60 | 6 | 2 | A | TH |
| HGOF2060-15-TH | ★ | 6 | 1.5 | 9 | 18 | 5.7 | 60 | 6 | 2 | B | TH |
| HGOF2080-20-TH | ★ | 8 | 2 | 12 | 24 | 7.6 | 75 | 8 | 2 | B | TH |
| HGOF2100-20-TH | ★ | 10 | 2 | 15 | 30 | 9.5 | 80 | 10 | 2 | B | TH |
| HGOF2120-20-TH | ★ | 12 | 2 | 18 | 36 | 11.5 | 100 | 12 | 2 | B | TH |

HGOF4-TH

| Item code | Stock | Size (mm) | | | | | | | No. of flutes | Type | Coating |
|----------------|-------|-----------------|---------------------|----------------------|-------------------------|-----------------|----------------------|----------------------|---------------|------|---------|
| | | Tool dia. DC | Corner radius RE | Flute length APMX | Under neck length LU | Neck dia. DN | Overall length LF | Shank dia. DCONMS | | | |
| HGOF4020-05-TH | ● | 2 | 0.5 | 1 | 6 | 1.9 | 60 | 6 | 4 | A | TH |
| HGOF4030-08-TH | ● | 3 | 0.8 | 1.5 | 9 | 2.9 | 60 | 6 | 4 | A | TH |
| HGOF4040-10-TH | ● | 4 | 1 | 2 | 12 | 3.8 | 60 | 6 | 4 | A | TH |
| HGOF4050-12-TH | ● | 5 | 1.2 | 2.5 | 15 | 4.7 | 60 | 6 | 4 | A | TH |
| HGOF4060-15-TH | ● | 6 | 1.5 | 3 | 18 | 5.7 | 60 | 6 | 4 | B | TH |
| HGOF4080-20-TH | ● | 8 | 2 | 4 | 24 | 7.6 | 75 | 8 | 4 | B | TH |
| HGOF4100-20-TH | ● | 10 | 2 | 5 | 30 | 9.5 | 80 | 10 | 4 | B | TH |
| HGOF4120-20-TH | ● | 12 | 2 | 6 | 36 | 11.5 | 100 | 12 | 4 | B | TH |

Epoch G Radius

HGOR-TH



Tolerance on dia. : $\begin{matrix} 0 \\ -0.03\text{mm} \end{matrix}$

HGOR4-TH


| Item code | Stock | Size (mm) | | | | | | | No. of flutes | Coating |
|----------------|-------|-----------|---------------|--------------|-------------------|-----------|----------------|------------|---------------|---------|
| | | Tool dia. | Corner radius | Flute length | Under neck length | Neck dia. | Overall length | Shank dia. | | |
| HGOR4060-03-TH | ● | 6 | 0.3 | 9 | 18 | 5.7 | 50 | 6 | 4 | TH |
| HGOR4060-05-TH | ● | 6 | 0.5 | 9 | 18 | 5.7 | 50 | 6 | 4 | TH |
| HGOR4060-10-TH | ● | 6 | 1 | 9 | 18 | 5.7 | 50 | 6 | 4 | TH |
| HGOR4080-03-TH | ● | 8 | 0.3 | 12 | 24 | 7.6 | 55 | 8 | 4 | TH |
| HGOR4080-05-TH | ● | 8 | 0.5 | 12 | 24 | 7.6 | 55 | 8 | 4 | TH |
| HGOR4080-10-TH | ● | 8 | 1 | 12 | 24 | 7.6 | 55 | 8 | 4 | TH |
| HGOR4100-03-TH | ● | 10 | 0.3 | 15 | 30 | 9.5 | 70 | 10 | 4 | TH |
| HGOR4100-05-TH | ● | 10 | 0.5 | 15 | 30 | 9.5 | 70 | 10 | 4 | TH |
| HGOR4100-10-TH | ● | 10 | 1 | 15 | 30 | 9.5 | 70 | 10 | 4 | TH |
| HGOR4120-03-TH | ● | 12 | 0.3 | 18 | 36 | 11.5 | 75 | 12 | 4 | TH |
| HGOR4120-10-TH | ● | 12 | 1 | 18 | 36 | 11.5 | 75 | 12 | 4 | TH |
| HGOR4160-05-TH | ● | 16 | 0.5 | 24 | 48 | 15 | 90 | 16 | 4 | TH |
| HGOR4160-20-TH | ● | 16 | 2 | 24 | 48 | 15 | 90 | 16 | 4 | TH |
| HGOR4200-05-TH | ● | 20 | 0.5 | 30 | 60 | 19 | 100 | 20 | 4 | TH |
| HGOR4200-20-TH | ● | 20 | 2 | 30 | 60 | 19 | 100 | 20 | 4 | TH |

HGOS2-PN Panacea




Tolerance on dia. : Below table


Tolerance on shank : h5



A type



B type



C type

HGOS4-PN Panacea



Tolerance on dia. : Below table

Tolerance on shank : h5

HGOS2-PN

| (mm) | |
|-----------|----------------|
| Tool dia. | Dia. tolerance |
| 0.2~0.9 | 0~-0.015 |
| 1~20 | 0~-0.02 |

| Item code | Stock | Size (mm) | | | | | No. of flutes | Type | Coating |
|-------------|-------|-----------|--------------|-------------------|----------------|------------|---------------|------|---------|
| | | Tool dia. | Flute length | Under neck length | Overall length | Shank dia. | | | |
| | | DC | APMX | LU | LF | DCONMS | | | |
| HGOS2002-PN | ★ | 0.2 | 0.4 | 0.6 | 40 | 4 | 2 | A | PN |
| HGOS2003-PN | ★ | 0.3 | 0.6 | 0.9 | 40 | 4 | 2 | A | PN |
| HGOS2004-PN | ★ | 0.4 | 0.8 | 1.1 | 40 | 4 | 2 | A | PN |
| HGOS2005-PN | ★ | 0.5 | 1 | 1.3 | 40 | 4 | 2 | A | PN |
| HGOS2006-PN | ★ | 0.6 | 1.2 | 1.5 | 40 | 4 | 2 | A | PN |
| HGOS2007-PN | ★ | 0.7 | 1.4 | 1.7 | 40 | 4 | 2 | A | PN |
| HGOS2008-PN | ★ | 0.8 | 1.6 | 1.9 | 40 | 4 | 2 | A | PN |
| HGOS2009-PN | ★ | 0.9 | 1.8 | 2.1 | 40 | 4 | 2 | A | PN |
| HGOS2010-PN | ★ | 1 | 2 | 2.5 | 40 | 4 | 2 | A | PN |
| HGOS2015-PN | ★ | 1.5 | 3 | 3.5 | 40 | 4 | 2 | A | PN |
| HGOS2020-PN | ★ | 2 | 6 | 7 | 40 | 4 | 2 | A | PN |
| HGOS2025-PN | ★ | 2.5 | 8 | 9 | 40 | 4 | 2 | A | PN |
| HGOS2030-PN | ★ | 3 | 8 | 9 | 45 | 6 | 2 | A | PN |
| HGOS2035-PN | ★ | 3.5 | 10 | 11 | 45 | 6 | 2 | A | PN |
| HGOS2040-PN | ★ | 4 | 11 | 12 | 45 | 6 | 2 | B | PN |
| HGOS2045-PN | ★ | 4.5 | 11 | 12 | 45 | 6 | 2 | B | PN |
| HGOS2050-PN | ★ | 5 | 13 | 14 | 60 | 6 | 2 | B | PN |
| HGOS2055-PN | ★ | 5.5 | 13 | 14 | 60 | 6 | 2 | B | PN |
| HGOS2060-PN | ★ | 6 | 13 | — | 60 | 6 | 2 | C | PN |
| HGOS2070-PN | ★ | 7 | 16 | 17 | 70 | 8 | 2 | B | PN |
| HGOS2080-PN | ★ | 8 | 19 | — | 75 | 8 | 2 | C | PN |
| HGOS2090-PN | ★ | 9 | 19 | 20 | 80 | 10 | 2 | B | PN |
| HGOS2100-PN | ★ | 10 | 22 | — | 80 | 10 | 2 | C | PN |
| HGOS2120-PN | ★ | 12 | 26 | — | 100 | 12 | 2 | C | PN |
| HGOS2160-PN | ★ | 16 | 35 | — | 110 | 16 | 2 | C | PN |
| HGOS2200-PN | ★ | 20 | 40 | — | 125 | 20 | 2 | C | PN |

HGOS4-PN

| (mm) | |
|-----------|----------------|
| Tool dia. | Dia. tolerance |
| 1~20 | 0~-0.02 |

| Item code | Stock | Size (mm) | | | | | No. of flutes | Type | Coating |
|-------------|-------|-----------|--------------|-------------------|----------------|------------|---------------|------|---------|
| | | Tool dia. | Flute length | Under neck length | Overall length | Shank dia. | | | |
| | | DC | APMX | LU | LF | DCONMS | | | |
| HGOS4010-PN | ★ | 1 | 2.5 | 3 | 40 | 4 | 4 | A | PN |
| HGOS4015-PN | ★ | 1.5 | 4 | 4.5 | 40 | 4 | 4 | A | PN |
| HGOS4020-PN | ★ | 2 | 6 | 7 | 40 | 4 | 4 | A | PN |
| HGOS4025-PN | ★ | 2.5 | 8 | 9 | 40 | 4 | 4 | A | PN |
| HGOS4030-PN | ★ | 3 | 10 | 11 | 45 | 6 | 4 | A | PN |
| HGOS4040-PN | ★ | 4 | 12 | 13 | 45 | 6 | 4 | B | PN |
| HGOS4050-PN | ★ | 5 | 15 | 16 | 60 | 6 | 4 | B | PN |
| HGOS4060-PN | ★ | 6 | 15 | — | 60 | 6 | 4 | C | PN |
| HGOS4080-PN | ★ | 8 | 20 | — | 75 | 8 | 4 | C | PN |
| HGOS4100-PN | ★ | 10 | 25 | — | 80 | 10 | 4 | C | PN |
| HGOS4120-PN | ★ | 12 | 30 | — | 100 | 12 | 4 | C | PN |
| HGOS4160-PN | ★ | 16 | 35 | — | 110 | 16 | 4 | C | PN |
| HGOS4200-PN | ★ | 20 | 40 | — | 125 | 20 | 4 | C | PN |

High-rigidity flute shape and TH Coating enables high-speed finishing of high-hardness steels.

Flute shape designed with consideration given to chip removal enables high-accuracy finishing of pre-hardened steel and hardened steel.

Features of HGOSH-TH

- 01** Enables high-speed finishing of pre-hardened steel and hardened steel with hardnesses of 35 to 55 HRC.
- 02** Use of TH Coating with excellent layer hardness and heat-resistance offers long tool life when cutting high-hardness steels.
- 03** Under neck specifications enable processing depths of up to 3D.




Epoch G Square

HGOSH-TH




Tolerance on dia. : Right table Tolerance on shank : h5

A type

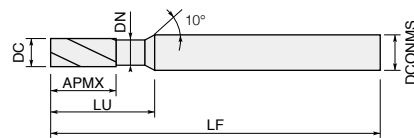

B type




| (mm) | |
|-----------|-------------------|
| Tool dia. | Tolerance on dia. |
| 1~6 | 0 -0.015 |
| 8~12 | 0 -0.02 |

HGOSH4 $\circ\circ\circ$ -TH

| Item Code | Stock | Size (mm) | | | | | | No. of flutes | Type | Coating |
|--------------|-------|-----------|--------------|-------------------|-----------|----------------|------------|---------------|------|---------|
| | | Tool dia. | Flute length | Under neck length | Neck dia. | Overall length | Shank dia. | | | |
| | | DC | APMX | LU | DN | LF | DCONMS | | | |
| HGOSH4010-TH | ● | 1 | 2 | 3 | 0.96 | 50 | 6 | 4 | A | TH |
| HGOSH4015-TH | ● | 1.5 | 3 | 4.5 | 1.44 | 50 | 6 | 4 | A | TH |
| HGOSH4020-TH | ● | 2 | 4 | 6 | 1.92 | 50 | 6 | 4 | A | TH |
| HGOSH4030-TH | ● | 3 | 6 | 9 | 2.88 | 60 | 6 | 4 | A | TH |
| HGOSH4040-TH | ● | 4 | 8 | 12 | 3.85 | 60 | 6 | 4 | A | TH |
| HGOSH4060-TH | ● | 6 | 12 | 18 | 5.85 | 60 | 6 | 4 | B | TH |
| HGOSH4080-TH | ● | 8 | 16 | 24 | 7.8 | 75 | 8 | 4 | B | TH |
| HGOSH4100-TH | ● | 10 | 20 | 30 | 9.8 | 80 | 10 | 4 | B | TH |
| HGOSH4120-TH | ● | 12 | 24 | 36 | 11.8 | 100 | 12 | 4 | B | TH |

● : Inventory maintained in US

Recommended Cutting Conditions (Inch)




HGOB-PN

| Types of finishing | Ball radius RE (mm) | Tool dia. DC (mm) | Flute length APMX (mm) | Copper alloy, Aluminium alloy | | | | Cast iron, Carbon steel (150~200HB) No.35B, 1050, 1060 | | | | Stainless steel (25~35HRC) AISI 304, AISI 316 | | | |
|--------------------|---------------------|-------------------|------------------------|--------------------------------|------------------|---------|---------|--|------------------|---------|---------|---|------------------|---------|---------|
| | | | | Revolution n min ⁻¹ | Feed rate vf IPM | ap inch | ae inch | Revolution n min ⁻¹ | Feed rate vf IPM | ap inch | ae inch | Revolution n min ⁻¹ | Feed rate vf IPM | ap inch | ae inch |
| | | | | Roughing | 0.15 | 0.3 | 0.6 | 35,032 | 82.8 | .002 | .005 | 31,847 | 75.2 | .002 | .005 |
| 0.2 | 0.4 | 0.8 | 35,032 | | 82.8 | .002 | .006 | 31,847 | 75.2 | .002 | .006 | 28,662 | 67.7 | .002 | .006 |
| 0.25 | 0.5 | 1 | 35,032 | | 82.8 | .003 | .008 | 31,847 | 75.2 | .003 | .008 | 28,662 | 67.7 | .002 | .007 |
| 0.3 | 0.6 | 1.2 | 29,193 | | 91.9 | .003 | .009 | 26,539 | 83.6 | .003 | .009 | 23,885 | 75.2 | .003 | .009 |
| 0.4 | 0.8 | 1.6 | 26,274 | | 82.8 | .004 | .012 | 23,885 | 75.2 | .004 | .012 | 21,497 | 67.7 | .004 | .012 |
| 0.5 | 1 | 2.5 | 28,025 | | 110.4 | .005 | .015 | 25,478 | 100.3 | .005 | .015 | 22,930 | 90.3 | .005 | .015 |
| 0.75 | 1.5 | 4 | 25,690 | | 121.4 | .008 | .023 | 23,355 | 110.4 | .008 | .023 | 21,019 | 99.3 | .007 | .022 |
| 1 | 2 | 5 | 24,522 | | 135.2 | .010 | .031 | 22,293 | 122.9 | .010 | .031 | 20,064 | 110.6 | .010 | .030 |
| 1.25 | 2.5 | 7 | 22,420 | | 141.2 | .013 | .038 | 20,382 | 128.4 | .013 | .038 | 18,344 | 115.6 | .012 | .037 |
| 1.5 | 3 | 8 | 21,019 | | 148.9 | .015 | .046 | 19,108 | 135.4 | .015 | .046 | 17,197 | 121.9 | .015 | .044 |
| 2 | 4 | 8 | 20,143 | | 158.6 | .020 | .061 | 18,312 | 144.2 | .020 | .061 | 16,481 | 129.8 | .020 | .059 |
| | | 8 | 20,143 | | 190.3 | .020 | .061 | 18,312 | 173.0 | .020 | .061 | 16,481 | 155.7 | .020 | .059 |
| 2.5 | 5 | 10 | 18,217 | | 200.8 | .026 | .077 | 16,561 | 182.6 | .026 | .077 | 14,904 | 164.3 | .025 | .074 |
| 3 | 6 | 12 | 15,764 | | 198.6 | .031 | .092 | 14,331 | 180.6 | .031 | .092 | 12,898 | 162.5 | .030 | .089 |
| 4 | 8 | 14 | 12,699 | | 180.0 | .041 | .123 | 11,545 | 163.6 | .041 | .123 | 10,390 | 147.2 | .039 | .118 |
| 5 | 10 | 18 | 10,860 | | 171.0 | .051 | .154 | 9,873 | 155.5 | .051 | .154 | 8,885 | 139.9 | .049 | .148 |
| 6 | 12 | 22 | 9,634 | | 166.9 | .061 | .184 | 8,758 | 151.7 | .061 | .184 | 7,882 | 136.5 | .059 | .177 |
| 8 | 16 | 30 | 7,444 | | 140.7 | .082 | .246 | 6,768 | 127.9 | .082 | .246 | 6,091 | 115.1 | .079 | .236 |
| 10 | 20 | 38 | 5,955 | 121.9 | .102 | .307 | 5,414 | 110.8 | .102 | .307 | 4,873 | 99.8 | .098 | .295 | |
| Finishing | 0.15 | 0.3 | 0.6 | 44,586 | 70.2 | .001 | .001 | 37,155 | 58.5 | .001 | .001 | 33,439 | 47.4 | .001 | .001 |
| | 0.2 | 0.4 | 0.8 | 42,994 | 67.7 | .001 | .001 | 35,828 | 56.4 | .001 | .001 | 32,245 | 45.7 | .001 | .001 |
| | 0.25 | 0.5 | 1 | 42,038 | 66.2 | .001 | .001 | 35,032 | 55.2 | .001 | .001 | 31,529 | 44.7 | .001 | .001 |
| | 0.3 | 0.6 | 1.2 | 35,032 | 82.8 | .001 | .001 | 29,193 | 69.0 | .001 | .001 | 26,274 | 55.9 | .001 | .001 |
| | 0.4 | 0.8 | 1.6 | 31,051 | 73.3 | .002 | .002 | 25,876 | 61.1 | .002 | .002 | 23,288 | 49.5 | .002 | .002 |
| | 0.5 | 1 | 2.5 | 30,573 | 72.2 | .002 | .002 | 25,478 | 60.2 | .002 | .002 | 22,930 | 48.7 | .002 | .002 |
| | 0.75 | 1.5 | 4 | 29,299 | 69.2 | .003 | .003 | 24,416 | 57.7 | .003 | .003 | 21,975 | 46.7 | .003 | .003 |
| | 1 | 2 | 5 | 29,618 | 93.3 | .004 | .004 | 24,682 | 77.8 | .004 | .004 | 22,213 | 63.0 | .004 | .004 |
| | 1.25 | 2.5 | 7 | 28,280 | 89.1 | .005 | .005 | 23,567 | 74.2 | .005 | .005 | 21,210 | 60.1 | .005 | .005 |
| | 1.5 | 3 | 8 | 26,115 | 82.2 | .006 | .006 | 21,762 | 68.5 | .006 | .006 | 19,586 | 55.5 | .006 | .006 |
| | 2 | 4 | 8 | 24,363 | 76.7 | .008 | .008 | 20,303 | 63.9 | .008 | .008 | 18,272 | 51.8 | .008 | .008 |
| | | | 8 | 24,363 | 95.9 | .008 | .008 | 20,303 | 79.9 | .008 | .008 | 18,272 | 64.8 | .008 | .008 |
| | 2.5 | 5 | 10 | 22,548 | 88.8 | .010 | .010 | 18,790 | 74.0 | .010 | .010 | 16,911 | 59.9 | .010 | .010 |
| | 3 | 6 | 12 | 19,427 | 91.8 | .012 | .012 | 16,189 | 76.5 | .012 | .012 | 14,570 | 62.0 | .012 | .012 |
| | 4 | 8 | 14 | 16,003 | 75.6 | .016 | .016 | 13,336 | 63.0 | .016 | .016 | 12,002 | 51.0 | .016 | .016 |
| | 5 | 10 | 18 | 14,713 | 81.1 | .020 | .020 | 12,261 | 67.6 | .020 | .020 | 11,035 | 54.7 | .020 | .020 |
| | 6 | 12 | 22 | 13,535 | 95.9 | .024 | .024 | 11,279 | 79.9 | .024 | .024 | 10,151 | 64.8 | .024 | .024 |
| | 8 | 16 | 30 | 10,868 | 85.6 | .031 | .031 | 9,057 | 71.3 | .031 | .031 | 8,151 | 57.8 | .031 | .031 |
| 10 | 20 | 38 | 7,739 | 60.9 | .039 | .039 | 6,449 | 50.8 | .039 | .039 | 5,804 | 41.1 | .039 | .039 | |

[Note]

- ① PN Coating is less electro conductive. Therefore, electric transmitted measuring systems may not work.
- ② Use the appropriate coolant for the work material and machining shape.
- ③ Use a highly rigid and accurate machine as possible.
- ④ The pick feed in the table is a general condition; please select the a_e according to the cusp height requested.
- ⑤ These conditions are for general guidance; in actual machining conditions adjust the parameters according to your actual machine and work-piece conditions.
- ⑥ If the rpm available is lower than that recommended please reduce the feed rate to the same ratio.

Recommended Cutting Conditions (Inch)




HGOB-PN

| Types of finishing | Ball radius RE (mm) | Tool dia. DC (mm) | Flute length APMX (mm) | Alloy steel (25~35HRC) HPM7, H13, L6 | | | | Pre-hardened steel (35~45HRC) HPM-MAGIC, CENA1, NAK80 | | | | Hardened steel (45~52HRC) H13, HPM38, DAC-MAGIC | | | |
|--------------------|---------------------|-------------------|------------------------|--|------------------|---------|---------|---|------------------|---------|---------|---|------------------|---------|---------|
| | | | | Revolution n min ⁻¹ | Feed rate vf IPM | ap inch | ae inch | Revolution n min ⁻¹ | Feed rate vf IPM | ap inch | ae inch | Revolution n min ⁻¹ | Feed rate vf IPM | ap inch | ae inch |
| | | | | Roughing | 0.15 | 0.3 | 0.6 | 28,662 | 64.3 | .001 | .004 | 25,796 | 54.8 | .001 | .004 |
| 0.2 | 0.4 | 0.8 | 28,662 | | 64.3 | .002 | .006 | 25,796 | 54.8 | .002 | .005 | 22,930 | 46.3 | .002 | .005 |
| 0.25 | 0.5 | 1 | 28,662 | | 64.3 | .002 | .007 | 25,796 | 54.8 | .002 | .007 | 22,930 | 46.3 | .002 | .006 |
| 0.3 | 0.6 | 1.2 | 23,885 | | 71.5 | .003 | .009 | 21,497 | 60.9 | .003 | .008 | 19,108 | 51.5 | .003 | .008 |
| 0.4 | 0.8 | 1.6 | 21,497 | | 64.3 | .004 | .011 | 19,347 | 54.8 | .004 | .011 | 17,197 | 46.3 | .003 | .010 |
| 0.5 | 1 | 2.5 | 22,930 | | 85.7 | .005 | .014 | 20,637 | 73.1 | .005 | .014 | 18,344 | 61.7 | .004 | .013 |
| 0.75 | 1.5 | 4 | 21,019 | | 94.3 | .007 | .021 | 18,917 | 80.4 | .007 | .020 | 16,815 | 67.9 | .006 | .019 |
| 1 | 2 | 5 | 20,064 | | 105.0 | .009 | .028 | 18,057 | 89.6 | .009 | .027 | 16,051 | 75.6 | .009 | .026 |
| 1.25 | 2.5 | 7 | 18,344 | | 109.8 | .012 | .035 | 16,510 | 93.6 | .011 | .034 | 14,675 | 79.1 | .011 | .032 |
| 1.5 | 3 | 8 | 17,197 | | 115.8 | .014 | .043 | 15,478 | 98.7 | .014 | .041 | 13,758 | 83.3 | .013 | .039 |
| 2 | 4 | 8 | 16,481 | | 123.3 | .019 | .057 | 14,833 | 105.1 | .018 | .054 | 13,185 | 88.8 | .017 | .052 |
| | | 8 | 16,481 | | 148.0 | .019 | .057 | 14,833 | 126.1 | .018 | .054 | 13,185 | 106.5 | .017 | .052 |
| 2.5 | 5 | 10 | 14,904 | | 156.1 | .024 | .071 | 13,414 | 133.1 | .023 | .068 | 11,924 | 112.4 | .022 | .065 |
| 3 | 6 | 12 | 12,898 | | 154.4 | .028 | .085 | 11,608 | 131.6 | .027 | .081 | 10,318 | 111.1 | .026 | .078 |
| 4 | 8 | 14 | 10,390 | | 139.9 | .038 | .113 | 9,351 | 119.3 | .036 | .109 | 8,312 | 100.7 | .035 | .104 |
| 5 | 10 | 18 | 8,885 | | 132.9 | .047 | .142 | 7,997 | 113.3 | .045 | .136 | 7,108 | 95.7 | .043 | .130 |
| 6 | 12 | 22 | 7,882 | | 129.7 | .057 | .170 | 7,094 | 110.6 | .054 | .163 | 6,306 | 93.4 | .052 | .156 |
| 8 | 16 | 30 | 6,091 | 109.3 | .076 | .227 | 5,482 | 93.2 | .072 | .217 | 4,873 | 78.7 | .069 | .208 | |
| 10 | 20 | 38 | 4,873 | 94.8 | .094 | .283 | 4,385 | 80.8 | .091 | .272 | 3,898 | 68.2 | .087 | .260 | |
| Finishing | 0.15 | 0.3 | 0.6 | 33,439 | 47.4 | .0005 | .0005 | 30,096 | 38.4 | .0004 | .0004 | 26,752 | 30.3 | .0004 | .0004 |
| | 0.2 | 0.4 | 0.8 | 32,245 | 45.7 | .001 | .001 | 29,021 | 37.0 | .001 | .001 | 25,796 | 29.3 | .001 | .001 |
| | 0.25 | 0.5 | 1 | 31,529 | 44.7 | .001 | .001 | 28,376 | 36.2 | .001 | .001 | 25,223 | 28.6 | .001 | .001 |
| | 0.3 | 0.6 | 1.2 | 26,274 | 55.9 | .001 | .001 | 23,646 | 45.2 | .001 | .001 | 21,019 | 35.7 | .001 | .001 |
| | 0.4 | 0.8 | 1.6 | 23,288 | 49.5 | .001 | .001 | 20,959 | 40.1 | .001 | .001 | 18,631 | 31.7 | .001 | .001 |
| | 0.5 | 1 | 2.5 | 22,930 | 48.7 | .002 | .002 | 20,637 | 39.5 | .001 | .001 | 18,344 | 31.2 | .001 | .001 |
| | 0.75 | 1.5 | 4 | 21,975 | 46.7 | .002 | .002 | 19,777 | 37.8 | .002 | .002 | 17,580 | 29.9 | .002 | .002 |
| | 1 | 2 | 5 | 22,213 | 63.0 | .003 | .003 | 19,992 | 51.0 | .002 | .002 | 17,771 | 40.3 | .002 | .002 |
| | 1.25 | 2.5 | 7 | 21,210 | 60.1 | .004 | .004 | 19,089 | 48.7 | .003 | .003 | 16,968 | 38.5 | .003 | .003 |
| | 1.5 | 3 | 8 | 19,586 | 55.5 | .005 | .005 | 17,627 | 45.0 | .004 | .004 | 15,669 | 35.6 | .004 | .004 |
| | 2 | 4 | 8 | 18,272 | 51.8 | .006 | .006 | 16,445 | 42.0 | .005 | .005 | 14,618 | 33.1 | .005 | .005 |
| | | | 8 | 18,272 | 64.8 | .006 | .006 | 16,445 | 52.4 | .005 | .005 | 14,618 | 41.4 | .005 | .005 |
| | 2.5 | 5 | 10 | 16,911 | 59.9 | .008 | .008 | 15,220 | 48.5 | .006 | .006 | 13,529 | 38.3 | .006 | .006 |
| | 3 | 6 | 12 | 14,570 | 62.0 | .009 | .009 | 13,113 | 50.2 | .007 | .007 | 11,656 | 39.6 | .007 | .007 |
| | 4 | 8 | 14 | 12,002 | 51.0 | .013 | .013 | 10,802 | 41.3 | .009 | .009 | 9,602 | 32.7 | .009 | .009 |
| | 5 | 10 | 18 | 11,035 | 54.7 | .016 | .016 | 9,932 | 44.3 | .012 | .012 | 8,828 | 35.0 | .012 | .012 |
| | 6 | 12 | 22 | 10,151 | 64.8 | .019 | .019 | 9,136 | 52.4 | .014 | .014 | 8,121 | 41.4 | .014 | .014 |
| 8 | 16 | 30 | 8,151 | 57.8 | .025 | .025 | 7,336 | 46.8 | .019 | .019 | 6,521 | 37.0 | .019 | .019 | |
| 10 | 20 | 38 | 5,804 | 41.1 | .031 | .031 | 5,224 | 33.3 | .024 | .024 | 4,643 | 26.3 | .024 | .024 | |


Ball end mill pick feed and theoretical cusp height table (μ inch)

| Ball Radius RE | | Pick Feed : pf (inch) | | | | | | | | | | | Pick feed and Cusp height $H = RE - \sqrt{RE^2 - pf^2/4} \approx pf^2/8RE$ |
|----------------|-------|-----------------------|--------|--------|---------|--------|---------|---------|---------|---------|----------|----------|---|
| mm | inch | .0008 | .0012 | .0016 | .0020 | .0030 | .0039 | .0059 | .0079 | .0118 | .0157 | .0197 | |
| 0.1 | 0.004 | 19.685 | 44.488 | 79.527 | 125.197 | — | — | — | — | — | — | — | |
| 0.3 | 0.012 | 6.693 | 14.961 | 26.378 | 40.945 | 92.520 | 165.354 | 375.196 | — | — | — | — | |
| 0.5 | 0.020 | 3.937 | 9.055 | 15.748 | 24.803 | 55.512 | 98.819 | 222.834 | 397.637 | 906.691 | 1643.304 | 2637.396 | |
| 1 | 0.039 | 1.969 | 4.331 | 7.874 | 12.205 | 27.559 | 49.213 | 111.023 | 197.244 | 445.275 | 795.274 | 1249.998 | |
| 1.5 | 0.059 | 1.181 | 3.150 | 5.118 | 8.268 | 18.504 | 32.677 | 74.016 | 131.496 | 296.062 | 527.164 | 825.983 | |
| 2 | 0.079 | 1.181 | 2.362 | 3.937 | 6.299 | 13.780 | 24.803 | 55.512 | 98.819 | 221.653 | 394.881 | 617.715 | |
| 2.5 | 0.098 | .787 | 1.969 | 3.150 | 5.118 | 11.024 | 19.685 | 44.488 | 78.740 | 177.165 | 315.354 | 493.306 | |
| 3 | 0.118 | .669 | 1.575 | 2.756 | 3.937 | 9.055 | 16.535 | 37.008 | 65.748 | 147.638 | 262.598 | 410.629 | |
| 4 | 0.157 | .512 | 1.181 | 1.969 | 3.150 | 7.087 | 12.205 | 27.559 | 49.213 | 110.630 | 196.850 | 307.873 | |
| 5 | 0.197 | .394 | .787 | 1.575 | 2.362 | 5.512 | 9.843 | 22.047 | 39.370 | 88.583 | 157.480 | 246.063 | |
| 6 | 0.236 | .315 | .787 | 1.181 | 1.969 | 4.724 | 8.268 | 18.504 | 32.677 | 74.016 | 131.102 | 205.118 | |

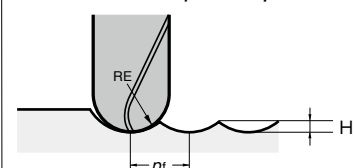


HGOB-TH

Roughing



| Work material (Hardness) | Condition range | Depth of cut (mm) | Cutting condition | Ball radius RE × Tool dia. DC (mm) | | | | | | | | | |
|--|-----------------|-------------------|-------------------------------------|------------------------------------|--------|---------|--------|--------|--------|--------|--------|--------|---------|
| | | | | RE0.5×1 | RE1×2 | RE1.5×3 | RE2×4 | RE3×6 | RE4×8 | RE5×10 | RE6×12 | RE8×16 | RE10×20 |
| Tool steel (25~35HRC) Alloy tool steels | High Speed | $a_p=0.1DC$ | Revolution n (min ⁻¹) | 50,000 | 48,000 | 32,000 | 24,000 | 16,000 | 12,000 | 10,000 | 8,000 | 6,000 | 4,800 |
| | | $a_e=0.3DC$ | Feed rate v_f (IPM) | 70.9 | 124.8 | 128.3 | 132.3 | 132.3 | 141.7 | 141.7 | 122.0 | 101.6 | 81.1 |
| | General | $a_p=0.1DC$ | Revolution n (min ⁻¹) | 20,000 | 20,000 | 16,000 | 12,000 | 8,000 | 6,000 | 4,800 | 4,000 | 3,000 | 2,400 |
| | | $a_e=0.3DC$ | Feed rate v_f (IPM) | 28.3 | 52.0 | 64.2 | 66.1 | 66.1 | 70.9 | 68.1 | 61.0 | 50.8 | 40.6 |
| Pre-hardened steel (35~45HRC) P21 | High Speed | $a_p=0.1DC$ | Revolution n (min ⁻¹) | 50,000 | 48,000 | 32,000 | 24,000 | 16,000 | 12,000 | 10,000 | 8,000 | 6,000 | 4,800 |
| | | $a_e=0.3DC$ | Feed rate v_f (IPM) | 63.0 | 109.4 | 113.4 | 115.4 | 115.7 | 118.9 | 122.8 | 105.9 | 87.4 | 70.1 |
| | General | $a_p=0.1DC$ | Revolution n (min ⁻¹) | 20,000 | 20,000 | 16,000 | 12,000 | 8,000 | 6,000 | 4,800 | 4,000 | 3,000 | 2,400 |
| | | $a_e=0.3DC$ | Feed rate v_f (IPM) | 25.2 | 45.7 | 56.7 | 57.5 | 57.9 | 59.4 | 59.1 | 52.8 | 43.7 | 35.0 |
| Hardened steel (45~55HRC) H13, L6 | High Speed | $a_p=0.08DC$ | Revolution n (min ⁻¹) | 50,000 | 38,000 | 25,000 | 19,000 | 13,000 | 10,000 | 7,600 | 6,400 | 4,800 | 3,800 |
| | | $a_e=0.24DC$ | Feed rate v_f (IPM) | 59.1 | 78.0 | 82.7 | 85.4 | 88.2 | 91.3 | 85.4 | 77.6 | 64.2 | 50.8 |
| | General | $a_p=0.1DC$ | Revolution n (min ⁻¹) | 20,000 | 16,000 | 11,000 | 8,000 | 5,300 | 4,000 | 3,200 | 2,700 | 2,000 | 1,600 |
| | | $a_e=0.3DC$ | Feed rate v_f (IPM) | 21.3 | 29.5 | 32.7 | 32.3 | 32.3 | 33.1 | 32.3 | 29.5 | 24.0 | 19.3 |
| Hardened steel (55~65HRC) D2, M2 | High Speed | $a_p=0.05DC$ | Revolution n (min ⁻¹) | 50,000 | 29,000 | 19,000 | 14,000 | 9,600 | 7,200 | 5,700 | 4,800 | 3,600 | 2,900 |
| | | $a_e=0.15DC$ | Feed rate v_f (IPM) | 51.2 | 54.7 | 56.7 | 57.5 | 59.1 | 59.4 | 58.3 | 52.8 | 43.7 | 35.0 |
| | General | $a_p=0.07DC$ | Revolution n (min ⁻¹) | 20,000 | 13,000 | 8,500 | 6,400 | 4,200 | 3,200 | 2,500 | 2,100 | 1,600 | 1,300 |
| | | $a_e=0.21DC$ | Feed rate v_f (IPM) | 18.5 | 22.0 | 22.8 | 23.6 | 23.2 | 23.6 | 23.2 | 20.9 | 17.3 | 14.2 |
| Hardened steel (65~70HRC) High speed tool steel | High Speed | $a_p=0.05DC$ | Revolution n (min ⁻¹) | 38,000 | 19,000 | 13,000 | 10,000 | 6,400 | 4,800 | 3,800 | 3,200 | 2,400 | 1,900 |
| | | $a_e=0.15DC$ | Feed rate v_f (IPM) | 39.0 | 35.8 | 39.0 | 40.9 | 39.4 | 39.8 | 39.0 | 35.4 | 29.1 | 23.2 |
| | General | $a_p=0.07DC$ | Revolution n (min ⁻¹) | 16,000 | 8,000 | 5,300 | 4,000 | 2,700 | 2,000 | 1,600 | 1,300 | 1,000 | 800 |
| | | $a_e=0.21DC$ | Feed rate v_f (IPM) | 14.6 | 13.8 | 14.2 | 14.6 | 15.0 | 15.0 | 14.6 | 13.0 | 11.0 | 8.7 |

Finishing




| Work material (Hardness) | Condition range | a_p : Finishing out amount a_e : Pick feed (mm) | Cutting condition | Ball radius RE × Tool dia. DC (mm) | | | | | | | | | |
|--|-----------------|--|-------------------------------------|------------------------------------|--------|---------|--------|--------|--------|--------|--------|--------|---------|
| | | | | RE0.5×1 | RE1×2 | RE1.5×3 | RE2×4 | RE3×6 | RE4×8 | RE5×10 | RE6×12 | RE8×16 | RE10×20 |
| Tool steel (25~35HRC) Alloy tool steel | High Speed | $a_p=0.05\sim0.1$ | Revolution n (min ⁻¹) | 50,000 | 32,000 | 25,000 | 22,000 | 16,000 | 12,000 | 10,000 | 8,000 | 6,000 | 4,800 |
| | | $a_e=0.02DC$ | Feed rate v_f (IPM) | 196.9 | 151.2 | 137.8 | 147.2 | 138.6 | 113.4 | 102.4 | 85.0 | 66.1 | 52.8 |
| | General | $a_p=0.05\sim0.1$ | Revolution n (min ⁻¹) | 20,000 | 20,000 | 17,000 | 13,000 | 8,500 | 6,400 | 5,100 | 4,200 | 3,200 | 2,500 |
| | | $a_e=0.02DC$ | Feed rate v_f (IPM) | 78.7 | 94.5 | 93.7 | 87.0 | 73.6 | 60.6 | 52.4 | 44.5 | 35.4 | 27.6 |
| Pre-hardened steel (35~45HRC) P21 | High Speed | $a_p=0.05\sim0.1$ | Revolution n (min ⁻¹) | 50,000 | 32,000 | 25,000 | 22,000 | 16,000 | 12,000 | 10,000 | 8,000 | 6,000 | 4,800 |
| | | $a_e=0.02DC$ | Feed rate v_f (IPM) | 196.9 | 151.2 | 137.8 | 147.2 | 138.6 | 113.4 | 102.4 | 85.0 | 66.1 | 52.8 |
| | General | $a_p=0.05\sim0.1$ | Revolution n (min ⁻¹) | 20,000 | 20,000 | 17,000 | 13,000 | 8,500 | 6,400 | 5,100 | 4,200 | 3,200 | 2,500 |
| | | $a_e=0.02DC$ | Feed rate v_f (IPM) | 78.7 | 94.5 | 93.7 | 87.0 | 73.6 | 60.6 | 52.4 | 44.5 | 35.4 | 27.6 |
| Hardened steel (45~55HRC) H13, L6 | High Speed | $a_p=0.05\sim0.1$ | Revolution n (min ⁻¹) | 50,000 | 32,000 | 24,000 | 20,000 | 13,000 | 10,000 | 8,000 | 6,600 | 5,000 | 4,000 |
| | | $a_e=0.02DC$ | Feed rate v_f (IPM) | 157.5 | 126.0 | 113.4 | 126.0 | 107.5 | 90.6 | 78.7 | 67.7 | 53.1 | 42.5 |
| | General | $a_p=0.05\sim0.1$ | Revolution n (min ⁻¹) | 20,000 | 20,000 | 14,000 | 10,000 | 6,900 | 5,200 | 4,100 | 3,500 | 2,600 | 2,100 |
| | | $a_e=0.02DC$ | Feed rate v_f (IPM) | 63.0 | 78.7 | 66.1 | 63.0 | 57.1 | 47.2 | 40.6 | 35.8 | 27.6 | 22.4 |
| Hardened steel (55~65HRC) D2, M2 | High Speed | $a_p=0.05\sim0.1$ | Revolution n (min ⁻¹) | 50,000 | 32,000 | 21,000 | 16,000 | 11,000 | 8,000 | 6,400 | 5,300 | 4,000 | 3,200 |
| | | $a_e=0.02DC$ | Feed rate v_f (IPM) | 98.4 | 113.4 | 99.2 | 94.5 | 86.6 | 69.3 | 60.6 | 52.4 | 40.9 | 32.7 |
| | General | $a_p=0.05\sim0.1$ | Revolution n (min ⁻¹) | 15,000 | 15,000 | 13,000 | 9,600 | 6,400 | 4,800 | 3,800 | 3,200 | 2,400 | 1,900 |
| | | $a_e=0.02DC$ | Feed rate v_f (IPM) | 29.5 | 53.1 | 61.4 | 56.7 | 50.4 | 41.7 | 35.8 | 31.5 | 24.4 | 19.3 |
| Hardened steel (65~70HRC) High speed tool steel | High Speed | $a_p=0.05\sim0.1$ | Revolution n (min ⁻¹) | 48,000 | 24,000 | 16,000 | 12,000 | 8,000 | 6,000 | 4,800 | 4,000 | 3,000 | 2,400 |
| | | $a_e=0.02DC$ | Feed rate v_f (IPM) | 94.5 | 85.0 | 75.6 | 70.9 | 63.0 | 52.0 | 45.3 | 39.4 | 30.7 | 24.4 |
| | General | $a_p=0.05\sim0.1$ | Revolution n (min ⁻¹) | 15,000 | 14,000 | 10,000 | 7,200 | 4,800 | 3,600 | 2,900 | 2,400 | 1,800 | 1,400 |
| | | $a_e=0.02DC$ | Feed rate v_f (IPM) | 29.5 | 49.6 | 47.2 | 42.5 | 37.8 | 31.1 | 27.6 | 23.6 | 18.5 | 14.2 |

- [Note]**
- ① Use a highly rigid and accurate machine as possible.
 - ② The pick feed in the table is a general condition; please select the a_e according to the cusp height requested.
 - ③ These conditions are for general guidance; in actual machining conditions adjust the parameters according to your actual machine and work-piece conditions.
 - ④ If the rpm available is lower than that recommended please reduce the feed rate to the same ratio.

Recommended Cutting Conditions (Inch)

HGFB-TH

Applied for from heavy roughing to finishing of over 35HRC up to 70HRC.
Recommended for Forging die and die casting die cutting.




Roughing

| Work material (Hardness) | Cutting range | Depth of cut (mm) | Cutting conditions | Ball radius RE × Tool dia. DC (mm) | | | | | | |
|---|---------------|------------------------------|-------------------------------------|------------------------------------|--------|---------|--------|--------|--------|--------|
| | | | | RE1.5×3 | RE2×4 | RE2.5×5 | RE3×6 | RE4×8 | RE5×10 | RE6×12 |
| Pre-hardened steel (35~45HRC) P21 | High Speed | $a_p=0.12DC$ $a_e=0.36DC$ | Revolution n (min ⁻¹) | 37,700 | 28,300 | 22,800 | 19,200 | 14,700 | 11,800 | 9,800 |
| | | | Feed rate v_f (IPM) | 142.5 | 142.5 | 143.7 | 145.3 | 148.0 | 148.8 | 143.7 |
| | General | $a_p=0.12DC$ $a_e=0.36DC$ | Revolution n (min ⁻¹) | 17,300 | 13,000 | 10,500 | 8,800 | 6,800 | 5,400 | 4,500 |
| | | | Feed rate v_f (IPM) | 61.4 | 61.4 | 62.2 | 62.2 | 64.2 | 63.8 | 61.8 |
| Hardened steel (45~55HRC) H13, L6 | High Speed | $a_p=0.1DC$ $a_e=0.3DC$ | Revolution n (min ⁻¹) | 27,500 | 20,600 | 16,700 | 14,000 | 10,700 | 8,600 | 7,200 |
| | | | Feed rate v_f (IPM) | 110.6 | 110.2 | 111.8 | 112.6 | 114.6 | 115.0 | 112.2 |
| | General | $a_p=0.1DC$ $a_e=0.3DC$ | Revolution n (min ⁻¹) | 14,300 | 10,700 | 8,600 | 7,300 | 5,600 | 4,500 | 3,700 |
| | | | Feed rate v_f (IPM) | 40.6 | 40.6 | 40.6 | 41.3 | 42.5 | 42.5 | 40.6 |
| Hardened steel (55~65HRC) D2, M2 | High Speed | $a_p=0.06DC$ $a_e=0.18DC$ | Revolution n (min ⁻¹) | 22,400 | 16,800 | 13,600 | 11,400 | 8,800 | 7,000 | 5,800 |
| | | | Feed rate v_f (IPM) | 89.8 | 89.8 | 90.9 | 91.7 | 94.1 | 93.7 | 90.6 |
| | General | $a_p=0.08DC$ $a_e=0.24DC$ | Revolution n (min ⁻¹) | 12,200 | 9,200 | 7,400 | 6,200 | 4,800 | 3,800 | 3,200 |
| | | | Feed rate v_f (IPM) | 28.7 | 29.1 | 29.1 | 29.1 | 30.3 | 29.9 | 29.1 |
| Hardened steel (65~72HRC) High speed tool steel | High Speed | $a_p=0.05DC$ $a_e=0.15DC$ | Revolution n (min ⁻¹) | 13,200 | 9,900 | 8,000 | 6,800 | 5,200 | 4,100 | 3,400 |
| | | | Feed rate v_f (IPM) | 43.7 | 43.7 | 44.1 | 44.9 | 45.7 | 45.3 | 43.7 |
| | General | $a_p=0.07DC$ $a_e=0.21DC$ | Revolution n (min ⁻¹) | 7,100 | 5,300 | 4,300 | 3,600 | 2,800 | 2,200 | 1,900 |
| | | | Feed rate v_f (IPM) | 13.4 | 13.4 | 13.4 | 13.8 | 14.2 | 13.8 | 13.8 |

Finishing


t : Finishing cut amount
 p_f : Pick feed



| Work material (Hardness) | Cutting range | Depth of cut (mm) | Cutting conditions | Ball radius RE × Tool dia. DC (mm) | | | | | | |
|---|---------------|---------------------------------|-------------------------------------|------------------------------------|--------|---------|--------|--------|--------|--------|
| | | | | RE1.5×3 | RE2×4 | RE2.5×5 | RE3×6 | RE4×8 | RE5×10 | RE6×12 |
| Pre-hardened steel (35~45HRC) P21 | High Speed | $t=0.05\sim0.1$ $p_f=0.02DC$ | Revolution n (min ⁻¹) | 27,500 | 24,200 | 20,900 | 17,600 | 13,200 | 11,000 | 8,800 |
| | | | Feed rate v_f (IPM) | 153.1 | 163.4 | 158.3 | 153.9 | 126.0 | 113.8 | 94.5 |
| | General | $t=0.05\sim0.1$ $p_f=0.02DC$ | Revolution n (min ⁻¹) | 17,000 | 13,000 | 10,500 | 8,500 | 6,400 | 5,100 | 4,200 |
| | | | Feed rate v_f (IPM) | 103.1 | 95.7 | 89.0 | 81.1 | 66.5 | 57.5 | 48.8 |
| Hardened steel (45~55HRC) H13, L6 | High Speed | $t=0.05\sim0.1$ $p_f=0.02DC$ | Revolution n (min ⁻¹) | 26,400 | 22,000 | 18,150 | 14,300 | 11,000 | 8,800 | 7,260 |
| | | | Feed rate v_f (IPM) | 126.0 | 139.8 | 130.3 | 119.3 | 100.4 | 87.4 | 75.2 |
| | General | $t=0.05\sim0.1$ $p_f=0.02DC$ | Revolution n (min ⁻¹) | 15,400 | 11,000 | 9,130 | 7,590 | 5,720 | 4,510 | 3,850 |
| | | | Feed rate v_f (IPM) | 72.8 | 69.3 | 65.7 | 63.0 | 52.0 | 44.5 | 39.4 |
| Hardened steel (55~65HRC) D2, M2 | High Speed | $t=0.05\sim0.1$ $p_f=0.02DC$ | Revolution n (min ⁻¹) | 23,100 | 17,600 | 14,850 | 12,100 | 8,800 | 7,040 | 5,830 |
| | | | Feed rate v_f (IPM) | 110.2 | 104.7 | 100.4 | 96.1 | 66.1 | 64.6 | 58.7 |
| | General | $t=0.05\sim0.1$ $p_f=0.02DC$ | Revolution n (min ⁻¹) | 14,300 | 10,560 | 7,040 | 5,280 | 4,180 | 3,520 | 2,640 |
| | | | Feed rate v_f (IPM) | 67.7 | 62.2 | 56.7 | 55.5 | 46.1 | 39.4 | 34.6 |
| Hardened steel (65~72HRC) High speed tool steel | High Speed | $t=0.05\sim0.1$ $p_f=0.02DC$ | Revolution n (min ⁻¹) | 17,600 | 13,200 | 11,000 | 8,800 | 6,600 | 5,280 | 4,400 |
| | | | Feed rate v_f (IPM) | 83.9 | 78.7 | 75.2 | 70.1 | 57.9 | 50.4 | 43.7 |
| | General | $t=0.05\sim0.1$ $p_f=0.02DC$ | Revolution n (min ⁻¹) | 11,000 | 7,920 | 6,490 | 5,280 | 3,960 | 3,190 | 2,640 |
| | | | Feed rate v_f (IPM) | 52.0 | 46.9 | 43.3 | 41.7 | 34.3 | 30.3 | 26.0 |

HGOF2-TH

Slotting




| Work material (Hardness) | Depth of cut DC: Tool dia. (mm) | Cutting condition | Tool dia. DC (mm) | | | | | | | |
|---|---------------------------------------|---|-------------------|-------|-------|-------|-------|-------|-------|-------|
| | | | φ2 | φ3 | φ4 | φ5 | φ6 | φ8 | φ10 | φ12 |
| Cast iron, Carbon steel, Alloy steel (200~250HB) Cast Iron, 1050 | $a_p \leq 1DC$ | Revolution n (min^{-1}) | 9,550 | 6,400 | 4,800 | 3,800 | 3,200 | 2,400 | 1,900 | 1,600 |
| | $a_e = 1DC$ | Feed rate v_f (IPM) | 6.6 | 7.7 | 8.7 | 9.1 | 9.6 | 10.2 | 9.1 | 8.5 |
| Alloy steel (25~35HRC) | $a_p \leq 0.5DC$ | Revolution n (min^{-1}) | 9,550 | 6,400 | 4,800 | 3,800 | 3,200 | 2,400 | 1,900 | 1,600 |
| | $a_e = 1DC$ | Feed rate v_f (IPM) | 5.4 | 6.9 | 7.9 | 8.3 | 8.7 | 9.3 | 8.2 | 7.6 |
| Stainless steel (25~35HRC) 304 | $a_p \leq 0.5DC$ | Revolution n (min^{-1}) | 6,685 | 4,480 | 3,360 | 2,660 | 2,240 | 1,680 | 1,330 | 1,120 |
| | $a_e = 1DC$ | Feed rate v_f (IPM) | 3.5 | 4.5 | 5.1 | 5.4 | 5.7 | 6.1 | 5.3 | 4.9 |
| Pre-hardened steel (35~45HRC) P21 | $a_p \leq 0.5DC$ | Revolution n (min^{-1}) | 8,750 | 5,800 | 4,400 | 3,500 | 2,900 | 2,200 | 1,800 | 1,500 |
| | $a_e = 1DC$ | Feed rate v_f (IPM) | 4.4 | 5.7 | 6.5 | 6.8 | 7.1 | 7.6 | 6.9 | 6.3 |
| Hardened steel (45~55HRC) H13, L6 | $a_p \leq 0.2DC$ | Revolution n (min^{-1}) | 8,000 | 5,300 | 4,000 | 3,200 | 2,700 | 2,000 | 1,600 | 1,300 |
| | $a_e = 1DC$ | Feed rate v_f (IPM) | 3.0 | 3.8 | 4.4 | 4.6 | 4.9 | 5.2 | 4.6 | 4.1 |

[Note]

- ① Use a highly rigid and accurate machine as possible.
- ② These conditions are for general guidance; in actual machining conditions adjust the parameters according to your actual machine and work-piece conditions.
- ③ If the rpm available is lower than that recommended please reduce the feed rate to the same ratio.
- ④ To increase efficiency even further, increase the rotation speed and the feed rate by the same ratio.

HGOF2-TH

Side cutting



| Work material (Hardness) | Depth of cut DC: Tool dia. (mm) | Cutting condition | Tool dia. DC (mm) | | | | | | | |
|---|---------------------------------------|---|-------------------|-------|-------|-------|-------|-------|-------|-------|
| | | | φ2 | φ3 | φ4 | φ5 | φ6 | φ8 | φ10 | φ12 |
| Cast iron, Carbon steel, Alloy steel (200~250HB) Cast Iron, 1050 | $a_p \leq 1.5DC$ | Revolution n (min^{-1}) | 14,300 | 9,600 | 7,200 | 5,700 | 4,800 | 3,600 | 2,900 | 2,400 |
| | $a_e = 0.15DC$ | Feed rate v_f (IPM) | 15.2 | 16.9 | 18.1 | 19.7 | 21.3 | 22.6 | 21.1 | 19.7 |
| Alloy steel (25~35HRC) | $a_p \leq 1.5DC$ | Revolution n (min^{-1}) | 14,300 | 9,600 | 7,200 | 5,700 | 4,800 | 3,600 | 2,900 | 2,400 |
| | $a_e = 0.1DC$ | Feed rate v_f (IPM) | 13.6 | 15.2 | 16.3 | 17.7 | 19.1 | 20.5 | 18.9 | 17.7 |
| Stainless steel (25~35HRC) 304 | $a_p \leq 1.5DC$ | Revolution n (min^{-1}) | 10,000 | 6,720 | 5,040 | 4,000 | 3,360 | 2,520 | 2,030 | 1,680 |
| | $a_e = 0.1DC$ | Feed rate v_f (IPM) | 8.9 | 9.8 | 10.6 | 11.6 | 12.4 | 13.4 | 12.4 | 11.6 |
| Pre-hardened steel (35~45HRC) P21 | $a_p \leq 1.5DC$ | Revolution n (min^{-1}) | 12,700 | 8,500 | 6,400 | 5,100 | 4,200 | 3,200 | 2,500 | 2,100 |
| | $a_e = 0.07DC$ | Feed rate v_f (IPM) | 11.0 | 12.0 | 13.0 | 14.2 | 14.8 | 16.1 | 14.6 | 13.8 |
| Hardened steel (45~55HRC) H13, L6 | $a_p \leq 1.5DC$ | Revolution n (min^{-1}) | 11,100 | 7,400 | 5,600 | 4,500 | 3,700 | 2,800 | 2,200 | 1,900 |
| | $a_e = 0.05DC$ | Feed rate v_f (IPM) | 7.9 | 9.1 | 9.8 | 10.8 | 11.4 | 12.4 | 11.2 | 10.8 |

[Note]

- ① Use a highly rigid and accurate machine as possible.
- ② These conditions are for general guidance; in actual machining conditions adjust the parameters according to your actual machine and work-piece conditions.
- ③ If the rpm available is lower than that recommended please reduce the feed rate to the same ratio.
- ④ To increase efficiency even further, increase the rotation speed and the feed rate by the same ratio.

Recommended Cutting Conditions (Inch)

HGOF4-TH HGOF2-TH

When using the 2-flute model, set feed rate only to 50% of the value below as a general criteria. Further, it is not recommended to use the 2-flute model for cutting materials with hardness of 55HRC.

Contouring


| Work material (Hardness) | Cutting condition | Tool dia. DC x Corner radius RE (mm) | | | | | | | |
|---|-------------------------------------|--------------------------------------|----------|--------|----------|----------|--------|---------|---------|
| | | φ2×RE0.5 | φ3×RE0.8 | φ4×RE1 | φ5×RE1.2 | φ6×RE1.5 | φ8×RE2 | φ10×RE2 | φ12×RE2 |
| Cast Iron, Carbon steel, Alloy steel (150~250HB) Cast Iron, 1050 | Revolution n (min ⁻¹) | 12,000 | 8,000 | 6,000 | 4,800 | 4,000 | 3,000 | 2,400 | 2,000 |
| | Feed rate v_f (IPM) | 211.8 | 238.2 | 251.2 | 251.2 | 264.6 | 264.6 | 264.6 | 251.2 |
| | a_p (inch) | .005 | .007 | .009 | .011 | .014 | .019 | .019 | .019 |
| | a_e (inch) | .020 | .028 | .039 | .051 | .059 | .079 | .118 | .157 |
| Tool steel (25~35HRC) 304 | Revolution n (min ⁻¹) | 11,000 | 7,400 | 5,600 | 4,500 | 3,700 | 2,800 | 2,200 | 1,900 |
| | Feed rate v_f (IPM) | 177.6 | 201.2 | 214.6 | 215.4 | 223.6 | 225.6 | 221.7 | 218.1 |
| | a_p (inch) | .005 | .007 | .009 | .011 | .014 | .019 | .019 | .019 |
| | a_e (inch) | .020 | .028 | .039 | .051 | .059 | .079 | .118 | .157 |
| Pre-hardened steel (35~45HRC) P21 | Revolution n (min ⁻¹) | 10,000 | 6,900 | 5,200 | 4,100 | 3,400 | 2,600 | 2,100 | 1,700 |
| | Feed rate v_f (IPM) | 126.0 | 146.9 | 155.5 | 153.5 | 160.6 | 163.8 | 165.4 | 152.8 |
| | a_p (inch) | .005 | .007 | .009 | .011 | .014 | .019 | .019 | .019 |
| | a_e (inch) | .020 | .028 | .039 | .051 | .059 | .079 | .118 | .157 |
| Hardened steel (45~55HRC) H13, L6 | Revolution n (min ⁻¹) | 8,000 | 5,300 | 4,000 | 3,200 | 2,700 | 2,000 | 1,600 | 1,300 |
| | Feed rate v_f (IPM) | 100.8 | 112.6 | 119.7 | 119.7 | 127.6 | 126.0 | 126.0 | 116.5 |
| | a_p (inch) | .003 | .005 | .007 | .008 | .010 | .013 | .013 | .013 |
| | a_e (inch) | .020 | .028 | .039 | .051 | .059 | .079 | .118 | .157 |
| Hardened steel (55~60HRC) D2, M2 | Revolution n (min ⁻¹) | 8,000 | 5,300 | 4,000 | 3,200 | 2,700 | 2,000 | 1,600 | 1,300 |
| | Feed rate v_f (IPM) | 50.2 | 56.1 | 60.0 | 60.0 | 64.0 | 63.0 | 63.0 | 58.6 |
| | a_p (inch) | .002 | .004 | .005 | .006 | .007 | .009 | .009 | .009 |
| | a_e (inch) | .020 | .028 | .039 | .051 | .059 | .079 | .118 | .157 |

[Note]

- ① Use a highly rigid and accurate machine as possible.
- ② These conditions are for general guidance; in actual machining conditions adjust the parameters according to your actual machine and work-piece conditions.
- ③ If the rpm available is lower than that recommended please reduce the feed rate to the same ratio.

HGOR-TH

Side cutting




| Work material (Hardness) | Depth of cut DC: Tool dia. (mm) | Cutting condition | Tool dia. DC (mm) | | | | | |
|---|---------------------------------------|--|-------------------|-------|-------|-------|-------|-------|
| | | | φ6 | φ8 | φ10 | φ12 | φ16 | φ20 |
| Cast Iron, Carbon steel, Alloy steel (200~250HB) Cast Iron, 1050 | $a_p \leq 1.5DC$ | Revolution n (min ⁻¹) | 5,836 | 4,377 | 3,501 | 2,918 | 2,188 | 1,751 |
| | $a_e = 0.1DC$ | Feed rate v_f (IPM) | 36.8 | 34.4 | 33.1 | 32.2 | 31 | 30.3 |
| Alloy steel (25~35HRC) | $a_p \leq 1.5DC$ | Revolution n (min ⁻¹) | 4,775 | 3,581 | 2,865 | 2,387 | 1,790 | 1,432 |
| | $a_e = 0.1DC$ | Feed rate v_f (IPM) | 26.3 | 25.4 | 24.8 | 24.4 | 24 | 22.6 |
| Pre-hardened steel (35~45HRC) P21 | $a_p \leq 1DC$ | Revolution n (min ⁻¹) | 4,244 | 3,183 | 2,546 | 2,122 | 1,592 | 1,273 |
| | $a_e = 0.07DC$ | Feed rate v_f (IPM) | 20 | 20 | 20 | 20 | 20 | 18 |
| Hardened steel (45~55HRC) H13, L6 | $a_p \leq 1DC$ | Revolution n (min ⁻¹) | 3,714 | 2,785 | 2,228 | 1,857 | 1,393 | 1,114 |
| | $a_e = 0.05DC$ | Feed rate v_f (IPM) | 8.8 | 8.8 | 8.8 | 8.8 | 8.8 | 7.9 |

[Note]

- ① Use a highly rigid and accurate machine as possible.
- ② These conditions are for general guidance; in actual machining conditions adjust the parameters according to your actual machine and work-piece conditions.
- ③ If the rpm available is lower than that recommended please reduce the feed rate to the same ratio.
- ④ To increase efficiency even further, increase the rotation speed and the feed rate by the same ratio.

HGOS2-PN HGOS4-PN



Side cutting

| Tool dia. DC (mm) | Flute length APMX (mm) | Copper alloy, Aluminium alloy | | | | Cast iron, Carbon steel (150~200HB) No.35 B, 1050, 1055 | | | | Stainless steel (25~35HRC) 304, 316 | | | |
|-------------------------|------------------------------|--------------------------------------|-----------------------|--------------|--------------|---|-----------------------|--------------|--------------|---|-----------------------|--------------|--------------|
| | | Revolution n (min ⁻¹) | Feed rate vf (IPM) | ap (inch) | ae (inch) | Revolution n (min ⁻¹) | Feed rate vf (IPM) | ap (inch) | ae (inch) | Revolution n (min ⁻¹) | Feed rate vf (IPM) | ap (inch) | ae (inch) |
| 0.2 | 0.4 | 66,879 | 26.3 | .012 | .0004 | 55,732 | 21.9 | .012 | .0004 | 33,439 | 11.9 | .012 | .0003 |
| 0.3 | 0.6 | 44,586 | 17.6 | .018 | .001 | 37,155 | 14.6 | .018 | .001 | 22,293 | 7.9 | .018 | .0005 |
| 0.4 | 0.8 | 38,217 | 15.0 | .024 | .001 | 27,866 | 11.0 | .024 | .001 | 16,720 | 5.9 | .024 | .001 |
| 0.5 | 1 | 38,217 | 15.0 | .030 | .001 | 25,478 | 10.0 | .030 | .001 | 15,287 | 5.4 | .030 | .001 |
| 0.6 | 1.2 | 41,401 | 26.1 | .035 | .001 | 26,539 | 16.7 | .035 | .001 | 15,924 | 9.0 | .035 | .001 |
| 0.7 | 1.4 | 35,487 | 22.4 | .041 | .001 | 29,572 | 18.6 | .041 | .001 | 17,743 | 10.1 | .041 | .001 |
| 0.8 | 1.6 | 33,439 | 21.1 | .047 | .002 | 25,876 | 16.3 | .047 | .002 | 15,525 | 8.8 | .047 | .001 |
| 0.9 | 1.8 | 33,970 | 21.4 | .053 | .002 | 24,770 | 15.6 | .053 | .002 | 14,862 | 8.4 | .053 | .001 |
| 1 | 2 | 38,217 | 30.1 | .059 | .002 | 25,478 | 20.1 | .059 | .002 | 15,287 | 10.8 | .059 | .002 |
| 1.5 | 3 | 28,025 | 22.1 | .089 | .006 | 21,231 | 16.7 | .089 | .006 | 12,739 | 9.0 | .089 | .005 |
| 2 | 6 | 21,019 | 24.8 | .118 | .008 | 19,108 | 22.6 | .118 | .008 | 11,465 | 12.2 | .118 | .007 |
| 2.5 | 8 | 16,815 | 19.8 | .148 | .010 | 17,834 | 21.1 | .148 | .010 | 10,701 | 11.4 | .148 | .009 |
| 3 | 8 | 15,287 | 24.1 | .177 | .012 | 15,924 | 25.1 | .177 | .012 | 9,554 | 13.5 | .177 | .011 |
| 3.5 | 10 | 13,103 | 20.6 | .207 | .014 | 14,559 | 22.9 | .207 | .014 | 8,735 | 12.4 | .207 | .012 |
| 4 | 11 | 11,465 | 22.6 | .236 | .016 | 13,535 | 26.7 | .236 | .016 | 8,121 | 14.4 | .236 | .014 |
| 4.5 | 11 | 10,191 | 20.1 | .266 | .018 | 12,739 | 25.1 | .266 | .018 | 7,643 | 13.5 | .266 | .016 |
| 5 | 13 | 9,172 | 21.7 | .295 | .020 | 12,102 | 28.6 | .295 | .020 | 7,261 | 15.4 | .295 | .018 |
| 5.5 | 13 | 8,338 | 19.7 | .325 | .022 | 11,581 | 27.4 | .325 | .022 | 6,948 | 14.8 | .325 | .019 |
| 6 | 13 | 7,643 | 18.1 | .354 | .024 | 10,616 | 25.1 | .354 | .024 | 6,369 | 13.5 | .354 | .021 |
| 7 | 16 | 6,551 | 18.1 | .413 | .028 | 9,099 | 25.1 | .413 | .028 | 5,460 | 13.5 | .413 | .025 |
| 8 | 19 | 5,732 | 15.8 | .472 | .031 | 7,962 | 21.9 | .472 | .031 | 4,777 | 11.9 | .472 | .028 |
| 9 | 19 | 5,096 | 16.1 | .531 | .035 | 7,077 | 22.3 | .531 | .035 | 4,246 | 12.0 | .531 | .032 |
| 10 | 22 | 4,586 | 18.1 | .591 | .039 | 6,369 | 25.1 | .591 | .039 | 3,822 | 13.5 | .591 | .035 |
| 12 | 26 | 3,822 | 18.1 | .709 | .047 | 5,308 | 25.1 | .709 | .047 | 3,185 | 13.5 | .709 | .043 |
| 16 | 35 | 2,866 | 15.8 | .945 | .063 | 3,981 | 21.9 | .945 | .063 | 2,389 | 11.9 | .945 | .057 |
| 20 | 40 | 2,293 | 14.4 | 1.181 | .079 | 3,185 | 20.1 | 1.181 | .079 | 1,911 | 10.8 | 1.181 | .071 |


| Tool dia. DC (mm) | Flute length APMX (mm) | Alloy steel (25~35HRC) P20, H13, L6 | | | | Pre-hardened steel (35~45HRC) P21 | | | | Hardened steel (45~52HRC) H13 | | | |
|-------------------------|------------------------------|---|-----------------------|--------------|--------------|---|-----------------------|--------------|--------------|--------------------------------------|-----------------------|--------------|--------------|
| | | Revolution n (min ⁻¹) | Feed rate vf (IPM) | ap (inch) | ae (inch) | Revolution n (min ⁻¹) | Feed rate vf (IPM) | ap (inch) | ae (inch) | Revolution n (min ⁻¹) | Feed rate vf (IPM) | ap (inch) | ae (inch) |
| 0.2 | 0.4 | 33,439 | 11.9 | .012 | .0003 | 26,752 | 8.5 | .012 | .0002 | 16,720 | 4.1 | .012 | .0002 |
| 0.3 | 0.6 | 22,293 | 7.9 | .018 | .0005 | 17,834 | 5.7 | .018 | .0004 | 11,146 | 2.8 | .018 | .0004 |
| 0.4 | 0.8 | 16,720 | 5.9 | .024 | .001 | 13,376 | 4.3 | .024 | .0005 | 8,360 | 2.1 | .024 | .0005 |
| 0.5 | 1 | 15,287 | 5.4 | .030 | .001 | 12,229 | 3.9 | .030 | .001 | 7,643 | 1.9 | .030 | .001 |
| 0.6 | 1.2 | 15,924 | 9.0 | .035 | .001 | 12,739 | 6.5 | .035 | .001 | 7,962 | 3.1 | .035 | .001 |
| 0.7 | 1.4 | 17,743 | 10.1 | .041 | .001 | 14,195 | 7.2 | .041 | .001 | 8,872 | 3.5 | .041 | .001 |
| 0.8 | 1.6 | 15,525 | 8.8 | .047 | .001 | 12,420 | 6.3 | .047 | .001 | 7,763 | 3.1 | .047 | .001 |
| 0.9 | 1.8 | 14,862 | 8.4 | .053 | .001 | 11,890 | 6.1 | .053 | .001 | 7,431 | 3.0 | .053 | .001 |
| 1 | 2 | 15,287 | 10.8 | .059 | .002 | 12,229 | 7.8 | .059 | .001 | 7,643 | 3.8 | .059 | .001 |
| 1.5 | 3 | 12,739 | 9.0 | .089 | .005 | 10,191 | 6.5 | .089 | .005 | 6,369 | 3.1 | .089 | .002 |
| 2 | 6 | 11,465 | 12.2 | .118 | .007 | 6,115 | 5.9 | .118 | .006 | 5,732 | 4.3 | .118 | .002 |
| 2.5 | 8 | 10,701 | 11.4 | .148 | .009 | 5,707 | 5.5 | .148 | .008 | 5,350 | 4.0 | .148 | .003 |
| 3 | 8 | 9,554 | 13.5 | .177 | .011 | 5,096 | 6.5 | .177 | .009 | 4,777 | 4.7 | .177 | .004 |
| 3.5 | 10 | 8,735 | 12.4 | .207 | .012 | 4,659 | 5.9 | .207 | .011 | 4,368 | 4.3 | .207 | .004 |
| 4 | 11 | 8,121 | 14.4 | .236 | .014 | 4,331 | 6.9 | .236 | .013 | 4,061 | 5.0 | .236 | .005 |
| 4.5 | 11 | 7,643 | 13.5 | .266 | .016 | 4,076 | 6.5 | .266 | .014 | 3,822 | 4.7 | .266 | .005 |
| 5 | 13 | 7,261 | 15.4 | .295 | .018 | 3,873 | 7.4 | .295 | .016 | 3,631 | 5.4 | .295 | .006 |
| 5.5 | 13 | 6,948 | 14.8 | .325 | .019 | 3,706 | 7.1 | .325 | .017 | 3,474 | 5.2 | .325 | .006 |
| 6 | 13 | 6,369 | 13.5 | .354 | .021 | 3,397 | 6.5 | .354 | .019 | 3,185 | 4.7 | .354 | .007 |
| 7 | 16 | 5,460 | 13.5 | .413 | .025 | 2,912 | 6.5 | .413 | .022 | 2,730 | 4.7 | .413 | .008 |
| 8 | 19 | 4,777 | 11.9 | .472 | .028 | 2,548 | 5.7 | .472 | .025 | 2,389 | 4.1 | .472 | .009 |
| 9 | 19 | 4,246 | 12.0 | .531 | .032 | 2,265 | 5.8 | .531 | .028 | 2,123 | 4.2 | .531 | .011 |
| 10 | 22 | 3,822 | 13.5 | .591 | .035 | 2,038 | 6.5 | .591 | .031 | 1,911 | 4.7 | .591 | .012 |
| 12 | 26 | 3,185 | 13.5 | .709 | .043 | 1,699 | 6.5 | .709 | .038 | 1,592 | 4.7 | .709 | .014 |
| 16 | 35 | 2,389 | 11.9 | .945 | .057 | 1,274 | 5.7 | .945 | .050 | 1,194 | 4.1 | .945 | .019 |
| 20 | 40 | 1,911 | 10.8 | 1.181 | .071 | 1,019 | 5.2 | 1.181 | .063 | 955 | 3.8 | 1.181 | .024 |

- [Note]**
- 1) PN Coating is less electro conductive. Therefore, electric transmitted measuring systems may not work.
 - 2) The cutting conditions given above is applied to 2 flutes type end mills. As for 4 flutes type, increase the feed rate by 1.5 times.
 - 3) Use a highly rigid and accurate machine as possible.
 - 4) Use the appropriate coolant for the work material and machining shape.
 - 5) These conditions are for general guidance; in actual machining conditions adjust the parameters according to your actual machine and work-piece conditions.
 - 6) If the rpm available is lower than that recommended please reduce the feed rate to the same ratio.

Recommended Cutting Conditions (Inch)

HGOS2-PN

Slotting




| Tool dia. DC (mm) | Flute length APMX (mm) | Copper alloy, Aluminium alloy | | | Cast iron, Carbon steel (150~200HB) No.35 B, 1050, 1055 | | | Stainless steel (25~35HRC) 304, 316 | | |
|-------------------------|------------------------------|---|-------------------------|-----------------|---|-------------------------|-----------------|---|-------------------------|-----------------|
| | | Revolution n (min^{-1}) | Feed rate vf (IPM) | a_p (inch) | Revolution n (min^{-1}) | Feed rate vf (IPM) | a_p (inch) | Revolution n (min^{-1}) | Feed rate vf (IPM) | a_p (inch) |
| 0.2 | 0.4 | 58,678 | 9.3 | .0004 | 53,344 | 8.4 | .0004 | 37,341 | 6.2 | .0004 |
| 0.3 | 0.6 | 39,119 | 6.1 | .001 | 35,563 | 5.6 | .001 | 24,894 | 5.5 | .001 |
| 0.4 | 0.8 | 35,032 | 5.5 | .001 | 26,672 | 4.2 | .001 | 22,293 | 6.1 | .001 |
| 0.5 | 1 | 31,529 | 5.0 | .001 | 25,478 | 4.0 | .001 | 20,064 | 5.5 | .001 |
| 0.6 | 1.2 | 32,113 | 10.1 | .001 | 23,885 | 7.5 | .001 | 20,435 | 5.6 | .001 |
| 0.7 | 1.4 | 30,027 | 9.4 | .002 | 25,023 | 7.9 | .002 | 19,108 | 6.3 | .002 |
| 0.8 | 1.6 | 28,463 | 9.0 | .002 | 23,885 | 7.5 | .002 | 18,113 | 6.0 | .002 |
| 0.9 | 1.8 | 27,247 | 8.6 | .002 | 23,001 | 7.2 | .002 | 17,339 | 6.7 | .002 |
| 1 | 2 | 28,025 | 11.0 | .002 | 22,293 | 8.8 | .002 | 17,834 | 6.9 | .002 |
| 1.5 | 3 | 21,019 | 8.3 | .003 | 16,985 | 6.7 | .003 | 14,862 | 5.7 | .003 |
| 2 | 6 | 15,764 | 7.4 | .005 | 14,331 | 6.8 | .005 | 11,146 | 6.1 | .005 |
| 2.5 | 8 | 12,611 | 5.9 | .007 | 11,465 | 5.4 | .007 | 8,917 | 4.9 | .007 |
| 3 | 8 | 11,677 | 6.4 | .012 | 9,554 | 5.3 | .012 | 7,431 | 4.1 | .012 |
| 3.5 | 10 | 10,009 | 5.5 | .014 | 9,099 | 5.0 | .014 | 6,369 | 5.3 | .014 |
| 4 | 11 | 8,758 | 5.5 | .024 | 7,962 | 5.0 | .024 | 5,573 | 4.6 | .024 |
| 4.5 | 11 | 7,785 | 4.9 | .035 | 7,077 | 4.4 | .035 | 4,954 | 5.5 | .035 |
| 5 | 13 | 7,006 | 5.5 | .049 | 6,369 | 5.0 | .049 | 4,459 | 4.9 | .049 |
| 5.5 | 13 | 6,369 | 5.0 | .054 | 5,790 | 4.6 | .054 | 4,053 | 4.4 | .054 |
| 6 | 13 | 5,839 | 9.2 | .071 | 5,308 | 8.3 | .071 | 3,715 | 6.1 | .071 |
| 7 | 16 | 5,005 | 7.9 | .096 | 4,550 | 7.2 | .096 | 3,185 | 6.1 | .096 |
| 8 | 19 | 4,379 | 6.9 | .126 | 3,981 | 6.3 | .126 | 1,672 | 3.7 | .126 |
| 9 | 19 | 3,892 | 9.2 | .159 | 3,539 | 8.3 | .159 | 1,486 | 5.7 | .159 |
| 10 | 22 | 3,503 | 8.3 | .197 | 3,185 | 7.5 | .197 | 1,338 | 5.9 | .197 |
| 12 | 26 | 2,919 | 9.2 | .236 | 2,654 | 8.3 | .236 | 1,115 | 5.5 | .236 |
| 16 | 35 | 2,189 | 8.6 | .315 | 1,990 | 7.8 | .315 | 975 | 5.4 | .315 |
| 20 | 40 | 1,752 | 8.3 | .394 | 1,592 | 7.5 | .394 | 836 | 5.5 | .394 |

| Tool dia. DC (mm) | Flute length APMX (mm) | Alloy steel (25~35HRC) P20, H13, L6 | | | Pre-hardened steel (35~45HRC) P21 | | | Hardened steel (45~52HRC) H13 | | |
|-------------------------|------------------------------|---|-------------------------|-----------------|---|-------------------------|-----------------|---|-------------------------|-----------------|
| | | Revolution n (min^{-1}) | Feed rate vf (IPM) | a_p (inch) | Revolution n (min^{-1}) | Feed rate vf (IPM) | a_p (inch) | Revolution n (min^{-1}) | Feed rate vf (IPM) | a_p (inch) |
| 0.2 | 0.4 | 24,005 | 4.8 | .0004 | 14,936 | 2.2 | .0004 | 8,402 | 1.3 | .0004 |
| 0.3 | 0.6 | 16,003 | 4.3 | .001 | 9,958 | 2.0 | .0004 | 5,601 | 1.2 | .0004 |
| 0.4 | 0.8 | 14,331 | 4.8 | .001 | 8,917 | 2.2 | .001 | 5,016 | 1.3 | .001 |
| 0.5 | 1 | 12,898 | 4.3 | .001 | 8,025 | 2.0 | .001 | 4,514 | 1.2 | .001 |
| 0.6 | 1.2 | 13,137 | 4.4 | .001 | 8,174 | 2.0 | .001 | 4,598 | 1.2 | .001 |
| 0.7 | 1.4 | 12,284 | 4.9 | .002 | 7,643 | 2.3 | .001 | 4,299 | 1.4 | .001 |
| 0.8 | 1.6 | 11,644 | 4.7 | .002 | 7,245 | 2.2 | .002 | 4,075 | 1.3 | .001 |
| 0.9 | 1.8 | 11,146 | 5.2 | .002 | 6,936 | 2.4 | .002 | 3,901 | 1.5 | .002 |
| 1 | 2 | 11,465 | 5.4 | .002 | 7,134 | 2.5 | .002 | 4,013 | 1.5 | .002 |
| 1.5 | 3 | 9,554 | 4.5 | .003 | 5,945 | 2.0 | .003 | 3,344 | 1.3 | .002 |
| 2 | 6 | 7,166 | 4.8 | .005 | 4,459 | 2.2 | .004 | 2,508 | 1.3 | .004 |
| 2.5 | 8 | 5,732 | 3.8 | .007 | 3,567 | 1.8 | .006 | 2,006 | 1.1 | .006 |
| 3 | 8 | 4,777 | 3.2 | .012 | 2,972 | 1.5 | .011 | 1,672 | 0.9 | .009 |
| 3.5 | 10 | 4,095 | 4.1 | .014 | 2,548 | 1.9 | .013 | 1,433 | 1.1 | .011 |
| 4 | 11 | 3,583 | 3.6 | .024 | 2,229 | 1.7 | .021 | 1,254 | 1.0 | .019 |
| 4.5 | 11 | 3,185 | 4.3 | .035 | 1,982 | 2.0 | .032 | 1,115 | 1.2 | .029 |
| 5 | 13 | 2,866 | 3.8 | .049 | 1,783 | 1.8 | .044 | 1,003 | 1.1 | .040 |
| 5.5 | 13 | 2,606 | 3.5 | .054 | 1,621 | 1.6 | .049 | 912 | 1.0 | .044 |
| 6 | 13 | 2,389 | 4.8 | .071 | 1,486 | 2.2 | .064 | 836 | 1.3 | .057 |
| 7 | 16 | 2,047 | 4.8 | .096 | 1,274 | 2.2 | .087 | 717 | 1.3 | .078 |
| 8 | 19 | 1,075 | 2.9 | .126 | 669 | 1.3 | .113 | 376 | 0.8 | .102 |
| 9 | 19 | 955 | 4.5 | .159 | 594 | 2.0 | .144 | 334 | 1.3 | .129 |
| 10 | 22 | 860 | 4.6 | .197 | 535 | 2.1 | .177 | 301 | 1.3 | .159 |
| 12 | 26 | 717 | 4.3 | .236 | 446 | 2.0 | .213 | 251 | 1.2 | .191 |
| 16 | 35 | 627 | 4.2 | .315 | 390 | 1.9 | .283 | 219 | 1.2 | .255 |
| 20 | 40 | 537 | 4.3 | .394 | 334 | 2.0 | .354 | 188 | 1.2 | .319 |


[Note] The 4 flutes not suitable for slotting.

HGOSH4-TH



Side milling

| Work Material (Hardness) | Cutting range | Depth of cut mm | Cutting conditions | Tool dia. DC (mm) | | | | | | | | |
|--|---------------|-----------------|--------------------------------------|-------------------|--------|--------|--------|--------|-------|-------|-------|-------|
| | | | | φ1 | φ1.5 | φ2 | φ3 | φ4 | φ6 | φ8 | φ10 | φ12 |
| Carbon steel Alloy Steel (200~250HB) 1050 | High speed | $a_p=1.5DC$ | Revolution n (min^{-1}) | 47,800 | 31,800 | 23,800 | 16,000 | 12,000 | 8,000 | 6,000 | 4,800 | 4,000 |
| | | $a_e=0.1DC$ | Feed rate v_f (IPM) | 59.1 | 63.0 | 66.9 | 70.9 | 74.8 | 86.6 | 94.5 | 86.6 | 82.7 |
| | General | $a_p=1.5DC$ | Revolution n (min^{-1}) | 28,600 | 19,100 | 14,300 | 9,600 | 7,200 | 4,800 | 3,600 | 2,900 | 2,400 |
| | | $a_e=0.15DC$ | Feed rate v_f (IPM) | 27.2 | 29.9 | 32.7 | 33.9 | 36.2 | 42.5 | 45.3 | 42.1 | 39.4 |
| Alloy steel P20 | High speed | $a_p=1.5DC$ | Revolution n (min^{-1}) | 41,400 | 27,600 | 20,700 | 14,000 | 10,000 | 6,900 | 5,200 | 4,100 | 3,500 |
| | | $a_e=0.05DC$ | Feed rate v_f (IPM) | 45.7 | 52.4 | 52.4 | 55.1 | 55.1 | 66.9 | 74.8 | 66.9 | 63.0 |
| | General | $a_p=1.5DC$ | Revolution n (min^{-1}) | 28,600 | 19,100 | 14,300 | 9,600 | 7,200 | 4,800 | 3,600 | 2,900 | 2,400 |
| | | $a_e=0.1DC$ | Feed rate v_f (IPM) | 22.8 | 27.2 | 29.1 | 30.3 | 32.7 | 38.2 | 40.9 | 37.8 | 35.4 |
| Pre-hardened steel (35~45HRC) P21 | High speed | $a_p=1.5DC$ | Revolution n (min^{-1}) | 35,000 | 23,300 | 17,500 | 12,000 | 8,800 | 5,800 | 4,400 | 3,500 | 2,900 |
| | | $a_e=0.05DC$ | Feed rate v_f (IPM) | 27.6 | 36.6 | 38.6 | 43.3 | 43.3 | 51.2 | 55.1 | 51.2 | 47.2 |
| | General | $a_p=1.5DC$ | Revolution n (min^{-1}) | 25,500 | 17,000 | 12,700 | 8,500 | 6,400 | 4,200 | 3,200 | 2,500 | 2,100 |
| | | $a_e=0.07DC$ | Feed rate v_f (IPM) | 18.1 | 20.1 | 22.0 | 24.0 | 26.0 | 29.5 | 32.3 | 29.1 | 27.6 |
| Hardened steel (45~55HRC) H13 | High speed | $a_p=1.5DC$ | Revolution n (min^{-1}) | 31,800 | 21,200 | 15,900 | 11,000 | 8,000 | 5,300 | 4,000 | 3,200 | 2,700 |
| | | $a_e=0.02DC$ | Feed rate v_f (IPM) | 25.2 | 29.9 | 32.7 | 33.9 | 35.4 | 40.9 | 44.1 | 40.6 | 38.6 |
| | General | $a_p=1.5DC$ | Revolution n (min^{-1}) | 22,300 | 14,800 | 11,100 | 7,400 | 5,600 | 3,700 | 2,800 | 2,200 | 1,900 |
| | | $a_e=0.05DC$ | Feed rate v_f (IPM) | 14.2 | 16.1 | 17.3 | 18.1 | 19.7 | 22.8 | 24.8 | 22.4 | 21.7 |




Slotting

| Work Material (Hardness) | Cutting range | Depth of cut mm | Cutting conditions | Tool dia. DC (mm) | | | | | | | | |
|--|---------------|------------------|--------------------------------------|-------------------|--------|--------|-------|-------|-------|-------|-------|-------|
| | | | | φ1 | φ1.5 | φ2 | φ3 | φ4 | φ6 | φ8 | φ10 | φ12 |
| Carbon steel Alloy Steel (200~250HB) 1050 | High speed | $a_p \leq 0.5DC$ | Revolution n (min^{-1}) | 25,500 | 17,000 | 12,700 | 8,500 | 6,400 | 4,200 | 3,200 | 2,500 | 2,100 |
| | | $a_e=1DC$ | Feed rate v_f (IPM) | 28.3 | 29.5 | 31.9 | 32.3 | 36.2 | 39.8 | 42.9 | 37.4 | 34.6 |
| | General | $a_p \leq 1DC$ | Revolution n (min^{-1}) | 19,100 | 12,700 | 9,500 | 6,400 | 4,800 | 3,200 | 2,400 | 1,900 | 1,600 |
| | | $a_e=1DC$ | Feed rate v_f (IPM) | 15.0 | 16.9 | 17.7 | 19.3 | 21.7 | 24.0 | 25.6 | 22.8 | 21.3 |
| Alloy steel P20 | High speed | | Revolution n (min^{-1}) | | | | | | | | | |
| | | | Feed rate v_f (IPM) | | | | | | | | | |
| | General | $a_p \leq 0.5DC$ | Revolution n (min^{-1}) | 19,100 | 12,700 | 9,500 | 6,400 | 4,800 | 3,200 | 2,400 | 1,900 | 1,600 |
| | | $a_e=0.1DC$ | Feed rate v_f (IPM) | 13.4 | 15.0 | 15.7 | 17.3 | 19.7 | 21.7 | 23.2 | 20.5 | 18.9 |
| Pre-hardened steel (35~45HRC) P21 | High speed | | Revolution n (min^{-1}) | | | | | | | | | |
| | | | Feed rate v_f (IPM) | | | | | | | | | |
| | General | $a_p \leq 0.5DC$ | Revolution n (min^{-1}) | 17,500 | 11,700 | 8,800 | 5,800 | 4,400 | 2,900 | 2,200 | 1,800 | 1,500 |
| | | $a_e=1DC$ | Feed rate v_f (IPM) | 11.0 | 11.8 | 13.0 | 14.2 | 16.1 | 17.7 | 18.9 | 17.3 | 15.7 |
| Hardened steel (45~55HRC) H13 | High speed | | Revolution n (min^{-1}) | | | | | | | | | |
| | | | Feed rate v_f (IPM) | | | | | | | | | |
| | General | $a_p \leq 0.2DC$ | Revolution n (min^{-1}) | 16,000 | 10,600 | 8,000 | 5,300 | 4,000 | 2,700 | 2,000 | 1,600 | 1,300 |
| | | $a_e=1DC$ | Feed rate v_f (IPM) | 7.5 | 8.3 | 9.4 | 9.4 | 11.0 | 12.2 | 13.0 | 11.4 | 10.2 |

[Note]

- ① Use the high-rigidity and high accuracy machine as possible
- ② These Recommended Cutting Conditions indicate only the rule of a thumb for the cutting conditions. In actual machining, the condition should be adjusted according to the machining shape, purpose and the machine type.
- ③ If the rpm available is lower than that recommended please reduce the feed rate to the same ratio.

Recommended Cutting Conditions (Metric)




HGOB-PN

| Types of finishing | Ball radius RE (mm) | Tool dia. DC (mm) | Flute length APMX (mm) | Copper alloy, Aluminium alloy | | | | Cast iron, Carbon steel (150~200HB) No.35B, 1050, 1060 | | | | Stainless steel (25~35HRC) AISI 304, AISI 316 | | | |
|--------------------|---------------------|-------------------|------------------------|--------------------------------|------------------|-------|-------|--|------------------|-------|-------|---|------------------|-------|-------|
| | | | | Revolution n min ⁻¹ | Feed rate vf IPM | ap mm | ae mm | Revolution n min ⁻¹ | Feed rate vf IPM | ap mm | ae mm | Revolution n min ⁻¹ | Feed rate vf IPM | ap mm | ae mm |
| | | | | Roughing | 0.15 | 0.3 | 0.6 | 35,032 | 2,102 | 0.039 | 0.117 | 31,847 | 1,911 | 0.039 | 0.117 |
| 0.2 | 0.4 | 0.8 | 35,032 | | 2,102 | 0.052 | 0.156 | 31,847 | 1,911 | 0.052 | 0.156 | 28,662 | 1,720 | 0.050 | 0.150 |
| 0.25 | 0.5 | 1 | 35,032 | | 2,102 | 0.065 | 0.195 | 31,847 | 1,911 | 0.065 | 0.195 | 28,662 | 1,720 | 0.063 | 0.187 |
| 0.3 | 0.6 | 1.2 | 29,193 | | 2,335 | 0.078 | 0.234 | 26,539 | 2,123 | 0.078 | 0.234 | 23,885 | 1,911 | 0.075 | 0.225 |
| 0.4 | 0.8 | 1.6 | 26,274 | | 2,102 | 0.104 | 0.312 | 23,885 | 1,911 | 0.104 | 0.312 | 21,497 | 1,720 | 0.100 | 0.300 |
| 0.5 | 1 | 2.5 | 28,025 | | 2,803 | 0.130 | 0.390 | 25,478 | 2,548 | 0.130 | 0.390 | 22,930 | 2,293 | 0.125 | 0.375 |
| 0.75 | 1.5 | 4 | 25,690 | | 3,083 | 0.195 | 0.585 | 23,355 | 2,803 | 0.195 | 0.585 | 21,019 | 2,522 | 0.188 | 0.562 |
| 1 | 2 | 5 | 24,522 | | 3,433 | 0.260 | 0.780 | 22,293 | 3,121 | 0.260 | 0.780 | 20,064 | 2,809 | 0.250 | 0.750 |
| 1.25 | 2.5 | 7 | 22,420 | | 3,587 | 0.325 | 0.975 | 20,382 | 3,261 | 0.325 | 0.975 | 18,344 | 2,935 | 0.313 | 0.937 |
| 1.5 | 3 | 8 | 21,019 | | 3,783 | 0.390 | 1.170 | 19,108 | 3,439 | 0.390 | 1.170 | 17,197 | 3,096 | 0.375 | 1.125 |
| 2 | 4 | 8 | 20,143 | | 4,029 | 0.520 | 1.560 | 18,312 | 3,662 | 0.520 | 1.560 | 16,481 | 3,296 | 0.500 | 1.500 |
| | | 8 | 20,143 | | 4,834 | 0.520 | 1.560 | 18,312 | 4,395 | 0.520 | 1.560 | 16,481 | 3,955 | 0.500 | 1.500 |
| 2.5 | 5 | 10 | 18,217 | | 5,101 | 0.650 | 1.950 | 16,561 | 4,637 | 0.650 | 1.950 | 14,904 | 4,173 | 0.625 | 1.875 |
| 3 | 6 | 12 | 15,764 | | 5,045 | 0.780 | 2.340 | 14,331 | 4,586 | 0.780 | 2.340 | 12,898 | 4,127 | 0.750 | 2.250 |
| 4 | 8 | 14 | 12,699 | | 4,572 | 1.040 | 3.120 | 11,545 | 4,156 | 1.040 | 3.120 | 10,390 | 3,740 | 1.000 | 3.000 |
| 5 | 10 | 18 | 10,860 | | 4,344 | 1.300 | 3.900 | 9,873 | 3,949 | 1.300 | 3.900 | 8,885 | 3,554 | 1.250 | 3.750 |
| 6 | 12 | 22 | 9,634 | | 4,239 | 1.560 | 4.680 | 8,758 | 3,854 | 1.560 | 4.680 | 7,882 | 3,468 | 1.500 | 4.500 |
| 8 | 16 | 30 | 7,444 | 3,573 | 2.080 | 6.240 | 6,768 | 3,248 | 2.080 | 6.240 | 6,091 | 2,924 | 2.000 | 6.000 | |
| 10 | 20 | 38 | 5,955 | 3,097 | 2.600 | 7.800 | 5,414 | 2,815 | 2.600 | 7.800 | 4,873 | 2,534 | 2.500 | 7.500 | |
| Finishing | 0.15 | 0.3 | 0.6 | 44,586 | 1,783 | 0.015 | 0.015 | 37,155 | 1,486 | 0.015 | 0.015 | 33,439 | 1,204 | 0.015 | 0.015 |
| | 0.2 | 0.4 | 0.8 | 42,994 | 1,720 | 0.020 | 0.020 | 35,828 | 1,433 | 0.020 | 0.020 | 32,245 | 1,161 | 0.020 | 0.020 |
| | 0.25 | 0.5 | 1 | 42,038 | 1,682 | 0.025 | 0.025 | 35,032 | 1,401 | 0.025 | 0.025 | 31,529 | 1,135 | 0.025 | 0.025 |
| | 0.3 | 0.6 | 1.2 | 35,032 | 2,102 | 0.030 | 0.030 | 29,193 | 1,752 | 0.030 | 0.030 | 26,274 | 1,419 | 0.030 | 0.030 |
| | 0.4 | 0.8 | 1.6 | 31,051 | 1,863 | 0.040 | 0.040 | 25,876 | 1,553 | 0.040 | 0.040 | 23,288 | 1,258 | 0.040 | 0.040 |
| | 0.5 | 1 | 2.5 | 30,573 | 1,834 | 0.050 | 0.050 | 25,478 | 1,529 | 0.050 | 0.050 | 22,930 | 1,238 | 0.050 | 0.050 |
| | 0.75 | 1.5 | 4 | 29,299 | 1,758 | 0.075 | 0.075 | 24,416 | 1,465 | 0.075 | 0.075 | 21,975 | 1,187 | 0.075 | 0.075 |
| | 1 | 2 | 5 | 29,618 | 2,369 | 0.100 | 0.100 | 24,682 | 1,975 | 0.100 | 0.100 | 22,213 | 1,599 | 0.100 | 0.100 |
| | 1.25 | 2.5 | 7 | 28,280 | 2,262 | 0.125 | 0.125 | 23,567 | 1,885 | 0.125 | 0.125 | 21,210 | 1,527 | 0.125 | 0.125 |
| | 1.5 | 3 | 8 | 26,115 | 2,089 | 0.150 | 0.150 | 21,762 | 1,741 | 0.150 | 0.150 | 19,586 | 1,410 | 0.150 | 0.150 |
| | 2 | 4 | 8 | 24,363 | 1,949 | 0.200 | 0.200 | 20,303 | 1,624 | 0.200 | 0.200 | 18,272 | 1,316 | 0.200 | 0.200 |
| | | | 8 | 24,363 | 2,436 | 0.200 | 0.200 | 20,303 | 2,030 | 0.200 | 0.200 | 18,272 | 1,645 | 0.200 | 0.200 |
| | 2.5 | 5 | 10 | 22,548 | 2,255 | 0.250 | 0.250 | 18,790 | 1,879 | 0.250 | 0.250 | 16,911 | 1,522 | 0.250 | 0.250 |
| | 3 | 6 | 12 | 19,427 | 2,331 | 0.300 | 0.300 | 16,189 | 1,943 | 0.300 | 0.300 | 14,570 | 1,574 | 0.300 | 0.300 |
| | 4 | 8 | 14 | 16,003 | 1,920 | 0.400 | 0.400 | 13,336 | 1,600 | 0.400 | 0.400 | 12,002 | 1,296 | 0.400 | 0.400 |
| | 5 | 10 | 18 | 14,713 | 2,060 | 0.500 | 0.500 | 12,261 | 1,717 | 0.500 | 0.500 | 11,035 | 1,390 | 0.500 | 0.500 |
| | 6 | 12 | 22 | 13,535 | 2,436 | 0.600 | 0.600 | 11,279 | 2,030 | 0.600 | 0.600 | 10,151 | 1,645 | 0.600 | 0.600 |
| 8 | 16 | 30 | 10,868 | 2,174 | 0.800 | 0.800 | 9,057 | 1,811 | 0.800 | 0.800 | 8,151 | 1,467 | 0.800 | 0.800 | |
| 10 | 20 | 38 | 7,739 | 1,548 | 1.000 | 1.000 | 6,449 | 1,290 | 1.000 | 1.000 | 5,804 | 1,045 | 1.000 | 1.000 | |

[Note]

- ① PN Coating is less electro conductive. Therefore, electric transmitted measuring systems may not work.
- ② Use the appropriate coolant for the work material and machining shape.
- ③ Use a highly rigid and accurate machine as possible.
- ④ The pick feed in the table is a general condition; please select the a_e according to the cusp height requested.
- ⑤ These conditions are for general guidance; in actual machining conditions adjust the parameters according to your actual machine and work-piece conditions.
- ⑥ If the rpm available is lower than that recommended please reduce the feed rate to the same ratio.

HGOB-PN



| Types of finishing | Ball radius RE (mm) | Tool dia. DC (mm) | Flute length APMX (mm) | Alloy steel (25~35HRC) H13, L6 | | | | Pre-hardened steel (35~45HRC) | | | | Hardened steel (45~52HRC) H13 | | | |
|--------------------|---------------------|-------------------|------------------------|--------------------------------------|------------------|-------|--------|----------------------------------|------------------|-------|--------|-------------------------------------|------------------|-------|-------|
| | | | | Revolution n min ⁻¹ | Feed rate vf IPM | ap mm | ae mm | Revolution n min ⁻¹ | Feed rate vf IPM | ap mm | ae mm | Revolution n min ⁻¹ | Feed rate vf IPM | ap mm | ae mm |
| | | | | Roughing | | | | | | | | | | | |
| 0.15 | 0.3 | 0.6 | 28,662 | 1,634 | 0.036 | 0.108 | 25,796 | 1,393 | 0.035 | 0.103 | 22,930 | 1,176 | 0.033 | 0.099 | |
| 0.2 | 0.4 | 0.8 | 28,662 | 1,634 | 0.048 | 0.144 | 25,796 | 1,393 | 0.046 | 0.138 | 22,930 | 1,176 | 0.044 | 0.132 | |
| 0.25 | 0.5 | 1 | 28,662 | 1,634 | 0.060 | 0.180 | 25,796 | 1,393 | 0.058 | 0.172 | 22,930 | 1,176 | 0.055 | 0.165 | |
| 0.3 | 0.6 | 1.2 | 23,885 | 1,815 | 0.072 | 0.216 | 21,497 | 1,548 | 0.069 | 0.207 | 19,108 | 1,307 | 0.066 | 0.198 | |
| 0.4 | 0.8 | 1.6 | 21,497 | 1,634 | 0.096 | 0.288 | 19,347 | 1,393 | 0.092 | 0.276 | 17,197 | 1,176 | 0.088 | 0.264 | |
| 0.5 | 1 | 2.5 | 22,930 | 2,178 | 0.120 | 0.360 | 20,637 | 1,857 | 0.115 | 0.345 | 18,344 | 1,568 | 0.110 | 0.330 | |
| 0.75 | 1.5 | 4 | 21,019 | 2,396 | 0.180 | 0.540 | 18,917 | 2,043 | 0.173 | 0.517 | 16,815 | 1,725 | 0.165 | 0.495 | |
| 1 | 2 | 5 | 20,064 | 2,668 | 0.240 | 0.720 | 18,057 | 2,275 | 0.230 | 0.690 | 16,051 | 1,921 | 0.220 | 0.660 | |
| 1.25 | 2.5 | 7 | 18,344 | 2,788 | 0.300 | 0.900 | 16,510 | 2,377 | 0.288 | 0.862 | 14,675 | 2,008 | 0.275 | 0.825 | |
| 1.5 | 3 | 8 | 17,197 | 2,941 | 0.360 | 1.080 | 15,478 | 2,507 | 0.345 | 1.035 | 13,758 | 2,117 | 0.330 | 0.990 | |
| 2 | 4 | 8 | 16,481 | 3,131 | 0.480 | 1.440 | 14,833 | 2,670 | 0.460 | 1.380 | 13,185 | 2,255 | 0.440 | 1.320 | |
| | | 8 | 16,481 | 3,758 | 0.480 | 1.440 | 14,833 | 3,204 | 0.460 | 1.380 | 13,185 | 2,706 | 0.440 | 1.320 | |
| 2.5 | 5 | 10 | 14,904 | 3,965 | 0.600 | 1.800 | 13,414 | 3,380 | 0.575 | 1.725 | 11,924 | 2,855 | 0.550 | 1.650 | |
| 3 | 6 | 12 | 12,898 | 3,921 | 0.720 | 2.160 | 11,608 | 3,343 | 0.690 | 2.070 | 10,318 | 2,823 | 0.660 | 1.980 | |
| 4 | 8 | 14 | 10,390 | 3,553 | 0.960 | 2.880 | 9,351 | 3,030 | 0.920 | 2.760 | 8,312 | 2,558 | 0.880 | 2.640 | |
| 5 | 10 | 18 | 8,885 | 3,376 | 1.200 | 3.600 | 7,997 | 2,879 | 1.150 | 3.450 | 7,108 | 2,431 | 1.100 | 3.300 | |
| 6 | 12 | 22 | 7,882 | 3,295 | 1.440 | 4.320 | 7,094 | 2,809 | 1.380 | 4.140 | 6,306 | 2,372 | 1.320 | 3.960 | |
| 8 | 16 | 30 | 6,091 | 2,777 | 1.920 | 5.760 | 5,482 | 2,368 | 1.840 | 5.520 | 4,873 | 2,000 | 1.760 | 5.280 | |
| 10 | 20 | 38 | 4,873 | 2,407 | 2.400 | 7.200 | 4,385 | 2,052 | 2.300 | 6.900 | 3,898 | 1,733 | 2.200 | 6.600 | |
| Finishing | | | | | | | | | | | | | | | |
| 0.15 | 0.3 | 0.6 | 33,439 | 1,204 | 0.012 | 0.012 | 30,096 | 975 | 0.009 | 0.009 | 26,752 | 770 | 0.009 | 0.009 | |
| 0.2 | 0.4 | 0.8 | 32,245 | 1,161 | 0.016 | 0.016 | 29,021 | 940 | 0.012 | 0.012 | 25,796 | 743 | 0.012 | 0.012 | |
| 0.25 | 0.5 | 1 | 31,529 | 1,135 | 0.020 | 0.020 | 28,376 | 919 | 0.015 | 0.015 | 25,223 | 726 | 0.015 | 0.015 | |
| 0.3 | 0.6 | 1.2 | 26,274 | 1,419 | 0.024 | 0.024 | 23,646 | 1,149 | 0.018 | 0.018 | 21,019 | 908 | 0.018 | 0.018 | |
| 0.4 | 0.8 | 1.6 | 23,288 | 1,258 | 0.032 | 0.032 | 20,959 | 1,019 | 0.024 | 0.024 | 18,631 | 805 | 0.024 | 0.024 | |
| 0.5 | 1 | 2.5 | 22,930 | 1,238 | 0.040 | 0.040 | 20,637 | 1,003 | 0.030 | 0.030 | 18,344 | 792 | 0.030 | 0.030 | |
| 0.75 | 1.5 | 4 | 21,975 | 1,187 | 0.060 | 0.060 | 19,777 | 961 | 0.045 | 0.045 | 17,580 | 759 | 0.045 | 0.045 | |
| 1 | 2 | 5 | 22,213 | 1,599 | 0.080 | 0.080 | 19,992 | 1,295 | 0.060 | 0.060 | 17,771 | 1,024 | 0.060 | 0.060 | |
| 1.25 | 2.5 | 7 | 21,210 | 1,527 | 0.100 | 0.100 | 19,089 | 1,237 | 0.075 | 0.075 | 16,968 | 977 | 0.075 | 0.075 | |
| 1.5 | 3 | 8 | 19,586 | 1,410 | 0.120 | 0.120 | 17,627 | 1,142 | 0.090 | 0.090 | 15,669 | 903 | 0.090 | 0.090 | |
| | | 8 | 18,272 | 1,316 | 0.160 | 0.160 | 16,445 | 1,066 | 0.120 | 0.120 | 14,618 | 842 | 0.120 | 0.120 | |
| 2 | 4 | 8 | 18,272 | 1,645 | 0.160 | 0.160 | 16,445 | 1,332 | 0.120 | 0.120 | 14,618 | 1,052 | 0.120 | 0.120 | |
| | | 8 | 18,272 | 1,645 | 0.160 | 0.160 | 16,445 | 1,332 | 0.120 | 0.120 | 14,618 | 1,052 | 0.120 | 0.120 | |
| 2.5 | 5 | 10 | 16,911 | 1,522 | 0.200 | 0.200 | 15,220 | 1,233 | 0.150 | 0.150 | 13,529 | 974 | 0.150 | 0.150 | |
| 3 | 6 | 12 | 14,570 | 1,574 | 0.240 | 0.240 | 13,113 | 1,275 | 0.180 | 0.180 | 11,656 | 1,007 | 0.180 | 0.180 | |
| 4 | 8 | 14 | 12,002 | 1,296 | 0.320 | 0.320 | 10,802 | 1,050 | 0.240 | 0.240 | 9,602 | 830 | 0.240 | 0.240 | |
| 5 | 10 | 18 | 11,035 | 1,390 | 0.400 | 0.400 | 9,932 | 1,126 | 0.300 | 0.300 | 8,828 | 890 | 0.300 | 0.300 | |
| 6 | 12 | 22 | 10,151 | 1,645 | 0.480 | 0.480 | 9,136 | 1,332 | 0.360 | 0.360 | 8,121 | 1,052 | 0.360 | 0.360 | |
| 8 | 16 | 30 | 8,151 | 1,467 | 0.640 | 0.640 | 7,336 | 1,188 | 0.480 | 0.480 | 6,521 | 939 | 0.480 | 0.480 | |
| 10 | 20 | 38 | 5,804 | 1,045 | 0.800 | 0.800 | 5,224 | 846 | 0.600 | 0.600 | 4,643 | 669 | 0.600 | 0.600 | |


Ball end mill pick feed and theoretical cusp height table (μm)

| Ball Radius RE (mm) | Pick Feed : pf (mm) | | | | | | | | | | | Pick feed and Cusp height $H=RE-\sqrt{RE^2-pf^2/4} \approx pf^2/8RE$ |
|---------------------|---------------------|------|------|------|-------|------|------|-------|-------|-------|-------|---|
| | 0.02 | 0.03 | 0.04 | 0.05 | 0.075 | 0.1 | 0.15 | 0.2 | 0.3 | 0.4 | 0.5 | |
| 0.1 | 0.50 | 1.13 | 2.02 | 3.18 | — | — | — | — | — | — | — | |
| 0.3 | 0.17 | 0.38 | 0.67 | 1.04 | 2.35 | 4.20 | 9.53 | — | — | — | — | |
| 0.5 | 0.10 | 0.23 | 0.40 | 0.63 | 1.41 | 2.51 | 5.66 | 10.10 | 23.03 | 41.74 | 66.99 | |
| 1 | 0.05 | 0.11 | 0.20 | 0.31 | 0.70 | 1.25 | 2.82 | 5.01 | 11.31 | 20.20 | 31.75 | |
| 1.5 | 0.03 | 0.08 | 0.13 | 0.21 | 0.47 | 0.83 | 1.88 | 3.34 | 7.52 | 13.39 | 20.98 | |
| 2 | 0.03 | 0.06 | 0.10 | 0.16 | 0.35 | 0.63 | 1.41 | 2.50 | 5.63 | 10.03 | 15.69 | |
| 2.5 | 0.02 | 0.05 | 0.08 | 0.13 | 0.28 | 0.50 | 1.13 | 2.00 | 4.50 | 8.01 | 12.53 | |
| 3 | 0.017 | 0.04 | 0.07 | 0.10 | 0.23 | 0.42 | 0.94 | 1.67 | 3.75 | 6.67 | 10.43 | |
| 4 | 0.013 | 0.03 | 0.05 | 0.08 | 0.18 | 0.31 | 0.70 | 1.25 | 2.81 | 5.00 | 7.82 | |
| 5 | 0.010 | 0.02 | 0.04 | 0.06 | 0.14 | 0.25 | 0.56 | 1.00 | 2.25 | 4.00 | 6.25 | |
| 6 | 0.008 | 0.02 | 0.03 | 0.05 | 0.12 | 0.21 | 0.47 | 0.83 | 1.88 | 3.33 | 5.21 | |


Recommended Cutting Conditions (Metric)

HGOB-TH

Roughing



| Work material (Hardness) | Condition range | Depth of cut (mm) | Cutting condition | Ball radius RE × Tool dia. DC (mm) | | | | | | | | | |
|---|--------------------|----------------------|-------------------------------------|------------------------------------|--------|---------|--------|--------|--------|--------|--------|--------|---------|
| | | | | RE0.5×1 | RE1×2 | RE1.5×3 | RE2×4 | RE3×6 | RE4×8 | RE5×10 | RE6×12 | RE8×16 | RE10×20 |
| Tool steel (25~35HRC) Alloy tool steel | High Speed | $a_p=0.1DC$ | Revolution n (min ⁻¹) | 50,000 | 48,000 | 32,000 | 24,000 | 16,000 | 12,000 | 10,000 | 8,000 | 6,000 | 4,800 |
| | | $a_e=0.3DC$ | Feed rate v_f (mm/min) | 1,800 | 3,170 | 3,260 | 3,360 | 3,360 | 3,600 | 3,600 | 3,100 | 2,580 | 2,060 |
| | General | $a_p=0.1DC$ | Revolution n (min ⁻¹) | 20,000 | 20,000 | 16,000 | 12,000 | 8,000 | 6,000 | 4,800 | 4,000 | 3,000 | 2,400 |
| | | $a_e=0.3DC$ | Feed rate v_f (mm/min) | 720 | 1,320 | 1,630 | 1,680 | 1,680 | 1,800 | 1,730 | 1,550 | 1,290 | 1,030 |
| Pre-hardened steel (35~45HRC) P21 | High Speed | $a_p=0.1DC$ | Revolution n (min ⁻¹) | 50,000 | 48,000 | 32,000 | 24,000 | 16,000 | 12,000 | 10,000 | 8,000 | 6,000 | 4,800 |
| | | $a_e=0.3DC$ | Feed rate v_f (mm/min) | 1,600 | 2,780 | 2,880 | 2,930 | 2,940 | 3,020 | 3,120 | 2,690 | 2,220 | 1,780 |
| | General | $a_p=0.1DC$ | Revolution n (min ⁻¹) | 20,000 | 20,000 | 16,000 | 12,000 | 8,000 | 6,000 | 4,800 | 4,000 | 3,000 | 2,400 |
| | | $a_e=0.3DC$ | Feed rate v_f (mm/min) | 640 | 1,160 | 1,440 | 1,460 | 1,470 | 1,510 | 1,500 | 1,340 | 1,110 | 890 |
| Hardened steel (45~55HRC) H13, L6 | High Speed | $a_p=0.08DC$ | Revolution n (min ⁻¹) | 50,000 | 38,000 | 25,000 | 19,000 | 13,000 | 10,000 | 7,600 | 6,400 | 4,800 | 3,800 |
| | | $a_e=0.24DC$ | Feed rate v_f (mm/min) | 1,500 | 1,980 | 2,100 | 2,170 | 2,240 | 2,320 | 2,170 | 1,970 | 1,630 | 1,290 |
| | General | $a_p=0.1DC$ | Revolution n (min ⁻¹) | 20,000 | 16,000 | 11,000 | 8,000 | 5,300 | 4,000 | 3,200 | 2,700 | 2,000 | 1,600 |
| | | $a_e=0.3DC$ | Feed rate v_f (mm/min) | 540 | 750 | 830 | 820 | 820 | 840 | 820 | 750 | 610 | 490 |
| Hardened steel (55~65HRC) D2, M2 | High Speed | $a_p=0.05DC$ | Revolution n (min ⁻¹) | 50,000 | 29,000 | 19,000 | 14,000 | 9,600 | 7,200 | 5,700 | 4,800 | 3,600 | 2,900 |
| | | $a_e=0.15DC$ | Feed rate v_f (mm/min) | 1,300 | 1,390 | 1,440 | 1,460 | 1,500 | 1,510 | 1,480 | 1,340 | 1,110 | 890 |
| | General | $a_p=0.07DC$ | Revolution n (min ⁻¹) | 20,000 | 13,000 | 8,500 | 6,400 | 4,200 | 3,200 | 2,500 | 2,100 | 1,600 | 1,300 |
| | | $a_e=0.21DC$ | Feed rate v_f (mm/min) | 470 | 560 | 580 | 600 | 590 | 600 | 590 | 530 | 440 | 360 |
| Hardened steel (65~70HRC) High speed tool steel | High Speed | $a_p=0.05DC$ | Revolution n (min ⁻¹) | 38,000 | 19,000 | 13,000 | 10,000 | 6,400 | 4,800 | 3,800 | 3,200 | 2,400 | 1,900 |
| | | $a_e=0.15DC$ | Feed rate v_f (mm/min) | 990 | 910 | 990 | 1,040 | 1,000 | 1,010 | 990 | 900 | 740 | 590 |
| | General | $a_p=0.07DC$ | Revolution n (min ⁻¹) | 16,000 | 8,000 | 5,300 | 4,000 | 2,700 | 2,000 | 1,600 | 1,300 | 1,000 | 800 |
| | | $a_e=0.21DC$ | Feed rate v_f (mm/min) | 370 | 350 | 360 | 370 | 380 | 380 | 370 | 330 | 280 | 220 |




Finishing

| Work material (Hardness) | Condition range | a_p : Finishing cut amount a_e : Pick feed (mm) | Cutting condition | Ball radius RE × Tool dia. DC (mm) | | | | | | | | | |
|---|--------------------|---|-------------------------------------|------------------------------------|--------|---------|--------|--------|--------|--------|--------|--------|---------|
| | | | | RE0.5×1 | RE1×2 | RE1.5×3 | RE2×4 | RE3×6 | RE4×8 | RE5×10 | RE6×12 | RE8×16 | RE10×20 |
| Tool steel (25~35HRC) Alloy tool steel | High Speed | $a_p=0.05\sim0.1$ | Revolution n (min ⁻¹) | 50,000 | 32,000 | 25,000 | 22,000 | 16,000 | 12,000 | 10,000 | 8,000 | 6,000 | 4,800 |
| | | $a_e=0.02DC$ | Feed rate v_f (mm/min) | 5,000 | 3,840 | 3,500 | 3,740 | 3,520 | 2,880 | 2,600 | 2,160 | 1,680 | 1,340 |
| | General | $a_p=0.05\sim0.1$ | Revolution n (min ⁻¹) | 20,000 | 20,000 | 17,000 | 13,000 | 8,500 | 6,400 | 5,100 | 4,200 | 3,200 | 2,500 |
| | | $a_e=0.02DC$ | Feed rate v_f (mm/min) | 2,000 | 2,400 | 2,380 | 2,210 | 1,870 | 1,540 | 1,330 | 1,130 | 900 | 700 |
| Pre-hardened steel (35~45HRC) P21 | High Speed | $a_p=0.05\sim0.1$ | Revolution n (min ⁻¹) | 50,000 | 32,000 | 25,000 | 22,000 | 16,000 | 12,000 | 10,000 | 8,000 | 6,000 | 4,800 |
| | | $a_e=0.02DC$ | Feed rate v_f (mm/min) | 5,000 | 3,840 | 3,500 | 3,740 | 3,520 | 2,880 | 2,600 | 2,160 | 1,680 | 1,340 |
| | General | $a_p=0.05\sim0.1$ | Revolution n (min ⁻¹) | 20,000 | 20,000 | 17,000 | 13,000 | 8,500 | 6,400 | 5,100 | 4,200 | 3,200 | 2,500 |
| | | $a_e=0.02DC$ | Feed rate v_f (mm/min) | 2,000 | 2,400 | 2,380 | 2,210 | 1,870 | 1,540 | 1,330 | 1,130 | 900 | 700 |
| Hardened steel (45~55HRC) H13, L6 | High Speed | $a_p=0.05\sim0.1$ | Revolution n (min ⁻¹) | 50,000 | 32,000 | 24,000 | 20,000 | 13,000 | 10,000 | 8,000 | 6,600 | 5,000 | 4,000 |
| | | $a_e=0.02DC$ | Feed rate v_f (mm/min) | 4,000 | 3,200 | 2,880 | 3,200 | 2,730 | 2,300 | 2,000 | 1,720 | 1,350 | 1,080 |
| | General | $a_p=0.05\sim0.1$ | Revolution n (min ⁻¹) | 20,000 | 20,000 | 14,000 | 10,000 | 6,900 | 5,200 | 4,100 | 3,500 | 2,600 | 2,100 |
| | | $a_e=0.02DC$ | Feed rate v_f (mm/min) | 1,600 | 2,000 | 1,680 | 1,600 | 1,450 | 1,200 | 1,030 | 910 | 700 | 570 |
| Hardened steel (55~65HRC) D2, M2 | High Speed | $a_p=0.05\sim0.1$ | Revolution n (min ⁻¹) | 50,000 | 32,000 | 21,000 | 16,000 | 11,000 | 8,000 | 6,400 | 5,300 | 4,000 | 3,200 |
| | | $a_e=0.02DC$ | Feed rate v_f (mm/min) | 2,500 | 2,880 | 2,520 | 2,400 | 2,200 | 1,760 | 1,540 | 1,330 | 1,040 | 830 |
| | General | $a_p=0.05\sim0.1$ | Revolution n (min ⁻¹) | 15,000 | 15,000 | 13,000 | 9,600 | 6,400 | 4,800 | 3,800 | 3,200 | 2,400 | 1,900 |
| | | $a_e=0.02DC$ | Feed rate v_f (mm/min) | 750 | 1,350 | 1,560 | 1,440 | 1,280 | 1,060 | 910 | 800 | 620 | 490 |
| Hardened steel (65~70HRC) High speed tool steel | High Speed | $a_p=0.05\sim0.1$ | Revolution n (min ⁻¹) | 48,000 | 24,000 | 16,000 | 12,000 | 8,000 | 6,000 | 4,800 | 4,000 | 3,000 | 2,400 |
| | | $a_e=0.02DC$ | Feed rate v_f (mm/min) | 2,400 | 2,160 | 1,920 | 1,800 | 1,600 | 1,320 | 1,150 | 1,000 | 780 | 620 |
| | General | $a_p=0.05\sim0.1$ | Revolution n (min ⁻¹) | 15,000 | 14,000 | 10,000 | 7,200 | 4,800 | 3,600 | 2,900 | 2,400 | 1,800 | 1,400 |
| | | $a_e=0.02DC$ | Feed rate v_f (mm/min) | 750 | 1,260 | 1,200 | 1,080 | 960 | 790 | 700 | 600 | 470 | 360 |

- [Note]**
- ① Use a highly rigid and accurate machine as possible.
 - ② The pick feed in the table is a general condition; please select the a_e according to the cusp height requested.
 - ③ These conditions are for general guidance; in actual machining conditions adjust the parameters according to your actual machine and work-piece conditions.
 - ④ If the rpm available is lower than that recommended please reduce the feed rate to the same ratio.

HGFB-TH

Applied for from heavy roughing to finishing of over 35HRC up to 70HRC.
Recommended for Forging die and die casting die cutting.




Roughing

| Work material (Hardness) | Cutting range | Depth of cut (mm) | Cutting conditions | Ball radius RE × Tool dia. DC (mm) | | | | | | |
|---|---------------|------------------------------|-------------------------------------|------------------------------------|--------|---------|--------|--------|--------|--------|
| | | | | RE1.5×3 | RE2×4 | RE2.5×5 | RE3×6 | RE4×8 | RE5×10 | RE6×12 |
| Pre-hardened steel (35~45HRC) P21 | High Speed | $a_p=0.12DC$ $a_e=0.36DC$ | Revolution n (min ⁻¹) | 37,700 | 28,300 | 22,800 | 19,200 | 14,700 | 11,800 | 9,800 |
| | | | Feed rate v_f (mm/min) | 3,620 | 3,620 | 3,650 | 3,690 | 3,760 | 3,780 | 3,650 |
| | General | $a_p=0.12DC$ $a_e=0.36DC$ | Revolution n (min ⁻¹) | 17,300 | 13,000 | 10,500 | 8,800 | 6,800 | 5,400 | 4,500 |
| | | | Feed rate v_f (mm/min) | 1,560 | 1,560 | 1,580 | 1,580 | 1,630 | 1,620 | 1,570 |
| Hardened steel (45~55HRC) H13, L6 | High Speed | $a_p=0.1DC$ $a_e=0.3DC$ | Revolution n (min ⁻¹) | 27,500 | 20,600 | 16,700 | 14,000 | 10,700 | 8,600 | 7,200 |
| | | | Feed rate v_f (mm/min) | 2,810 | 2,800 | 2,840 | 2,860 | 2,910 | 2,920 | 2,850 |
| | General | $a_p=0.1DC$ $a_e=0.3DC$ | Revolution n (min ⁻¹) | 14,300 | 10,700 | 8,600 | 7,300 | 5,600 | 4,500 | 3,700 |
| | | | Feed rate v_f (mm/min) | 1,030 | 1,030 | 1,030 | 1,050 | 1,080 | 1,080 | 1,030 |
| Hardened steel (55~65HRC) D2, M2 | High Speed | $a_p=0.06DC$ $a_e=0.18DC$ | Revolution n (min ⁻¹) | 22,400 | 16,800 | 13,600 | 11,400 | 8,800 | 7,000 | 5,800 |
| | | | Feed rate v_f (mm/min) | 2,280 | 2,280 | 2,310 | 2,330 | 2,390 | 2,380 | 2,300 |
| | General | $a_p=0.08DC$ $a_e=0.24DC$ | Revolution n (min ⁻¹) | 12,200 | 9,200 | 7,400 | 6,200 | 4,800 | 3,800 | 3,200 |
| | | | Feed rate v_f (mm/min) | 730 | 740 | 740 | 740 | 770 | 760 | 740 |
| Hardened steel (65~72HRC) High speed tool steel | High Speed | $a_p=0.05DC$ $a_e=0.15DC$ | Revolution n (min ⁻¹) | 13,200 | 9,900 | 8,000 | 6,800 | 5,200 | 4,100 | 3,400 |
| | | | Feed rate v_f (mm/min) | 1,110 | 1,110 | 1,120 | 1,140 | 1,160 | 1,150 | 1,110 |
| | General | $a_p=0.07DC$ $a_e=0.21DC$ | Revolution n (min ⁻¹) | 7,100 | 5,300 | 4,300 | 3,600 | 2,800 | 2,200 | 1,900 |
| | | | Feed rate v_f (mm/min) | 340 | 340 | 340 | 350 | 360 | 350 | 350 |

Finishing

t : Finishing cut amount
 p_f : Pick feed




| Work material (Hardness) | Cutting range | Depth of cut (mm) | Cutting conditions | Ball radius RE × Tool dia. DC (mm) | | | | | | |
|---|---------------|---------------------------------|-------------------------------------|------------------------------------|--------|---------|--------|--------|--------|--------|
| | | | | RE1.5×3 | RE2×4 | RE2.5×5 | RE3×6 | RE4×8 | R5E×10 | RE6×12 |
| Pre-hardened steel (35~45HRC) P21 | High Speed | $t=0.05\sim0.1$ $p_f=0.02DC$ | Revolution n (min ⁻¹) | 27,500 | 24,200 | 20,900 | 17,600 | 13,200 | 11,000 | 8,800 |
| | | | Feed rate v_f (mm/min) | 3,890 | 4,150 | 4,020 | 3,910 | 3,200 | 2,890 | 2,400 |
| | General | $t=0.05\sim0.1$ $p_f=0.02DC$ | Revolution n (min ⁻¹) | 17,000 | 13,000 | 10,500 | 8,500 | 6,400 | 5,100 | 4,200 |
| | | | Feed rate v_f (mm/min) | 2,620 | 2,430 | 2,260 | 2,060 | 1,690 | 1,460 | 1,240 |
| Hardened steel (45~55HRC) H13, L6 | High Speed | $t=0.05\sim0.1$ $p_f=0.02DC$ | Revolution n (min ⁻¹) | 26,400 | 22,000 | 18,150 | 14,300 | 11,000 | 8,800 | 7,260 |
| | | | Feed rate v_f (mm/min) | 3,200 | 3,550 | 3,310 | 3,030 | 2,550 | 2,220 | 1,910 |
| | General | $t=0.05\sim0.1$ $p_f=0.02DC$ | Revolution n (min ⁻¹) | 15,400 | 11,000 | 9,130 | 7,590 | 5,720 | 4,510 | 3,850 |
| | | | Feed rate v_f (mm/min) | 1,850 | 1,760 | 1,670 | 1,600 | 1,320 | 1,130 | 1,000 |
| Hardened steel (55~65HRC) D2, M2 | High Speed | $t=0.05\sim0.1$ $p_f=0.02DC$ | Revolution n (min ⁻¹) | 23,100 | 17,600 | 14,850 | 12,100 | 8,800 | 7,040 | 5,830 |
| | | | Feed rate v_f (mm/min) | 2,800 | 2,660 | 2,550 | 2,440 | 1,680 | 1,640 | 1,490 |
| | General | $t=0.05\sim0.1$ $p_f=0.02DC$ | Revolution n (min ⁻¹) | 14,300 | 10,560 | 7,040 | 5,280 | 4,180 | 3,520 | 2,640 |
| | | | Feed rate v_f (mm/min) | 1,720 | 1,580 | 1,440 | 1,410 | 1,170 | 1,000 | 880 |
| Hardened steel (65~72HRC) High speed tool steel | High Speed | $t=0.05\sim0.1$ $p_f=0.02DC$ | Revolution n (min ⁻¹) | 17,600 | 13,200 | 11,000 | 8,800 | 6,600 | 5,280 | 4,400 |
| | | | Feed rate v_f (mm/min) | 2,130 | 2,000 | 1,910 | 1,780 | 1,470 | 1,280 | 1,110 |
| | General | $t=0.05\sim0.1$ $p_f=0.02DC$ | Revolution n (min ⁻¹) | 11,000 | 7,920 | 6,490 | 5,280 | 3,960 | 3,190 | 2,640 |
| | | | Feed rate v_f (mm/min) | 1,320 | 1,190 | 1,100 | 1,060 | 870 | 770 | 660 |

Recommended Cutting Conditions (Metric)

HGOF2-TH

Slotting




| Work material (Hardness) | Depth of cut DC: Tool dia. (mm) | Cutting condition | Tool dia. (mm) | | | | | | | |
|---|---------------------------------------|---|----------------|-------|-------|-------|-------|-------|-------|-------|
| | | | φ2 | φ3 | φ4 | φ5 | φ6 | φ8 | φ10 | φ12 |
| Cast iron, Carbon steel, Alloy steel (200~250HB) Cast Iron, 1050 | $a_p \leq 1DC$ | Revolution n (min^{-1}) | 9,550 | 6,400 | 4,800 | 3,800 | 3,200 | 2,400 | 1,900 | 1,600 |
| | $a_e = 1DC$ | Feed rate v_f (mm/min) | 168 | 196 | 220 | 232 | 244 | 260 | 232 | 216 |
| Alloy steel (25~35HRC) | $a_p \leq 0.5DC$ | Revolution n (min^{-1}) | 9,550 | 6,400 | 4,800 | 3,800 | 3,200 | 2,400 | 1,900 | 1,600 |
| | $a_e = 1DC$ | Feed rate v_f (mm/min) | 136 | 176 | 200 | 212 | 220 | 236 | 208 | 192 |
| Stainless steel (25~35HRC) 304 | $a_p \leq 0.5DC$ | Revolution n (min^{-1}) | 6,685 | 4,480 | 3,360 | 2,660 | 2,240 | 1,680 | 1,330 | 1,120 |
| | $a_e = 1DC$ | Feed rate v_f (mm/min) | 90 | 115 | 130 | 138 | 145 | 155 | 135 | 125 |
| Pre-hardened steel (35~45HRC) P21 | $a_p \leq 0.5DC$ | Revolution n (min^{-1}) | 8,750 | 5,800 | 4,400 | 3,500 | 2,900 | 2,200 | 1,800 | 1,500 |
| | $a_e = 1DC$ | Feed rate v_f (mm/min) | 112 | 144 | 164 | 172 | 180 | 192 | 176 | 160 |
| Hardened steel (45~55HRC) H13, L6 | $a_p \leq 0.2DC$ | Revolution n (min^{-1}) | 8,000 | 5,300 | 4,000 | 3,200 | 2,700 | 2,000 | 1,600 | 1,300 |
| | $a_e = 1DC$ | Feed rate v_f (mm/min) | 76 | 96 | 112 | 116 | 124 | 132 | 116 | 104 |

[Note]

- ① Use a highly rigid and accurate machine as possible.
- ② These conditions are for general guidance; in actual machining conditions adjust the parameters according to your actual machine and work-piece conditions.
- ③ If the rpm available is lower than that recommended please reduce the feed rate to the same ratio.
- ④ To increase efficiency even further, increase the rotation speed and the feed rate by the same ratio.

HGOF2-TH

Side cutting



| Work material (Hardness) | Depth of cut DC: Tool dia. (mm) | Cutting condition | Tool dia. (mm) | | | | | | | |
|---|---------------------------------------|---|----------------|-------|-------|-------|-------|-------|-------|-------|
| | | | φ2 | φ3 | φ4 | φ5 | φ6 | φ8 | φ10 | φ12 |
| Cast iron, Carbon steel, Alloy steel (200~250HB) Cast Iron, 1050 | $a_p \leq 1.5DC$ | Revolution n (min^{-1}) | 14,300 | 9,600 | 7,200 | 5,700 | 4,800 | 3,600 | 2,900 | 2,400 |
| | $a_e = 0.15DC$ | Feed rate v_f (mm/min) | 385 | 430 | 460 | 500 | 540 | 575 | 535 | 500 |
| Alloy steel (25~35HRC) | $a_p \leq 1.5DC$ | Revolution n (min^{-1}) | 14,300 | 9,600 | 7,200 | 5,700 | 4,800 | 3,600 | 2,900 | 2,400 |
| | $a_e = 0.1DC$ | Feed rate v_f (mm/min) | 345 | 385 | 415 | 450 | 485 | 520 | 480 | 450 |
| Stainless steel (25~35HRC) 304 | $a_p \leq 1.5DC$ | Revolution n (min^{-1}) | 10,000 | 6,720 | 5,040 | 4,000 | 3,360 | 2,520 | 2,030 | 1,680 |
| | $a_e = 0.1DC$ | Feed rate v_f (mm/min) | 225 | 250 | 270 | 295 | 315 | 340 | 315 | 295 |
| Pre-hardened steel (35~45HRC) P21 | $a_p \leq 1.5DC$ | Revolution n (min^{-1}) | 12,700 | 8,500 | 6,400 | 5,100 | 4,200 | 3,200 | 2,500 | 2,100 |
| | $a_e = 0.07DC$ | Feed rate v_f (mm/min) | 280 | 305 | 330 | 360 | 375 | 410 | 370 | 350 |
| Hardened steel (45~55HRC) H13, L6 | $a_p \leq 1.5DC$ | Revolution n (min^{-1}) | 11,100 | 7,400 | 5,600 | 4,500 | 3,700 | 2,800 | 2,200 | 1,900 |
| | $a_e = 0.05DC$ | Feed rate v_f (mm/min) | 200 | 230 | 250 | 275 | 290 | 315 | 285 | 275 |

[Note]

- ① Use a highly rigid and accurate machine as possible.
- ② These conditions are for general guidance; in actual machining conditions adjust the parameters according to your actual machine and work-piece conditions.
- ③ If the rpm available is lower than that recommended please reduce the feed rate to the same ratio.
- ④ To increase efficiency even further, increase the rotation speed and the feed rate by the same ratio.

HGOF4-TH HGOF2-TH

When using the 2-flute model, set feed rate only to 50% of the value below as a general criteria. Further, it is not recommended to use the 2-flute model for cutting materials with hardness of 55HRC.

Contouring


| Work material (Hardness) | Cutting condition | Tool dia DC× Corner radius RE (mm) | | | | | | | |
|---|-------------------------------------|------------------------------------|----------|--------|----------|----------|--------|---------|---------|
| | | φ2×RE0.5 | φ3×RE0.8 | φ4×RE1 | φ5×RE1.2 | φ6×RE1.5 | φ8×RE2 | φ10×RE2 | φ12×RE2 |
| Cast Iron, Carbon steel, Alloy steel (150~250HB) Cast Iron, 1050 | Revolution n (min ⁻¹) | 12,000 | 8,000 | 6,000 | 4,800 | 4,000 | 3,000 | 2,400 | 2,000 |
| | Feed rate v_f (mm/min) | 5,380 | 6,050 | 6,380 | 6,380 | 6,720 | 6,720 | 6,720 | 6,380 |
| | a_p (mm) | 0.12 | 0.19 | 0.24 | 0.29 | 0.36 | 0.48 | 0.48 | 0.48 |
| | a_e (mm) | 0.5 | 0.7 | 1 | 1.3 | 1.5 | 2 | 3 | 4 |
| Tool steel (25~35HRC) 304 | Revolution n (min ⁻¹) | 11,000 | 7,400 | 5,600 | 4,500 | 3,700 | 2,800 | 2,200 | 1,900 |
| | Feed rate v_f (mm/min) | 4,510 | 5,110 | 5,450 | 5,470 | 5,680 | 5,730 | 5,630 | 5,540 |
| | a_p (mm) | 0.12 | 0.19 | 0.24 | 0.29 | 0.36 | 0.48 | 0.48 | 0.48 |
| | a_e (mm) | 0.5 | 0.7 | 1 | 1.3 | 1.5 | 2 | 3 | 4 |
| Pre-hardened steel (35~45HRC) P21 | Revolution n (min ⁻¹) | 10,000 | 6,900 | 5,200 | 4,100 | 3,400 | 2,600 | 2,100 | 1,700 |
| | Feed rate v_f (mm/min) | 3,200 | 3,730 | 3,950 | 3,900 | 4,080 | 4,160 | 4,200 | 3,880 |
| | a_p (mm) | 0.12 | 0.19 | 0.24 | 0.29 | 0.36 | 0.48 | 0.48 | 0.48 |
| | a_e (mm) | 0.5 | 0.7 | 1 | 1.3 | 1.5 | 2 | 3 | 4 |
| Hardened steel (45~55HRC) H13, L6 | Revolution n (min ⁻¹) | 8,000 | 5,300 | 4,000 | 3,200 | 2,700 | 2,000 | 1,600 | 1,300 |
| | Feed rate v_f (mm/min) | 2,560 | 2,860 | 3,040 | 3,040 | 3,240 | 3,200 | 3,200 | 2,960 |
| | a_p (mm) | 0.08 | 0.13 | 0.17 | 0.20 | 0.25 | 0.34 | 0.34 | 0.34 |
| | a_e (mm) | 0.5 | 0.7 | 1 | 1.3 | 1.5 | 2 | 3 | 4 |
| Hardened steel (55~60HRC) D2, M2 | Revolution n (min ⁻¹) | 8,000 | 5,300 | 4,000 | 3,200 | 2,700 | 2,000 | 1,600 | 1,300 |
| | Feed rate v_f (mm/min) | 1,275 | 1,425 | 1,525 | 1,525 | 1,625 | 1,600 | 1,600 | 1,488 |
| | a_p (mm) | 0.06 | 0.10 | 0.12 | 0.14 | 0.18 | 0.24 | 0.24 | 0.24 |
| | a_e (mm) | 0.5 | 0.7 | 1 | 1.3 | 1.5 | 2 | 3 | 4 |

[Note]

- ① Use a highly rigid and accurate machine as possible.
- ② These conditions are for general guidance; in actual machining conditions adjust the parameters according to your actual machine and work-piece conditions.
- ③ If the rpm available is lower than that recommended please reduce the feed rate to the same ratio.

HGOR-TH

Side cutting



| Work material (Hardness) | Depth of cut DC: Tool dia. (mm) | Cutting condition | Tool dia. DC (mm) | | | | | |
|---|---------------------------------------|--|-------------------|-------|-------|-------|-------|-------|
| | | | φ6 | φ8 | φ10 | φ12 | φ16 | φ20 |
| Cast Iron, Carbon steel, Alloy steel (200~250HB) Cast Iron, 1050 | $a_p \leq 1.5DC$ | Revolution n (min ⁻¹) | 5,836 | 4,377 | 3,501 | 2,918 | 2,188 | 1,751 |
| | $a_e = 0.1DC$ | Feed rate v_f (mm/min) | 934 | 875 | 840 | 817 | 788 | 770 |
| Alloy steel (25~35HRC) | $a_p \leq 1.5DC$ | Revolution n (min ⁻¹) | 4,775 | 3,581 | 2,865 | 2,387 | 1,790 | 1,432 |
| | $a_e = 0.1DC$ | Feed rate v_f (mm/min) | 668 | 645 | 630 | 621 | 609 | 573 |
| Pre-hardened steel (35~45HRC) P21 | $a_p \leq 1DC$ | Revolution n (min ⁻¹) | 4,244 | 3,183 | 2,546 | 2,122 | 1,592 | 1,273 |
| | $a_e = 0.07DC$ | Feed rate v_f (mm/min) | 509 | 509 | 509 | 509 | 509 | 458 |
| Hardened steel (45~55HRC) H13, L6 | $a_p \leq 1DC$ | Revolution n (min ⁻¹) | 3,714 | 2,785 | 2,228 | 1,857 | 1,393 | 1,114 |
| | $a_e = 0.05DC$ | Feed rate v_f (mm/min) | 223 | 223 | 223 | 223 | 223 | 201 |


[Note]

- ① Use a highly rigid and accurate machine as possible.
- ② These conditions are for general guidance; in actual machining conditions adjust the parameters according to your actual machine and work-piece conditions.
- ③ If the rpm available is lower than that recommended please reduce the feed rate to the same ratio.
- ④ To increase efficiency even further, increase the rotation speed and the feed rate by the same ratio.

Recommended Cutting Conditions (Metric)

HGOS2-PN HGOS4-PN

Side cutting




| Tool dia. DC (mm) | Flute length APMX (mm) | Copper alloy, Aluminium alloy | | | | Cast iron, Carbon steel (150~200HB) No.35 B, 1050, 1055 | | | | Stainless steel (25~35HRC) 304, 316 | | | |
|-------------------------|------------------------------|-------------------------------------|------------------------------------|-------------|-------------|---|------------------------------------|-------------|-------------|---|------------------------------------|-------------|-------------|
| | | Revolution n min^{-1} | Feed rate v_f mm/min | a_p mm | a_e mm | Revolution n min^{-1} | Feed rate v_f mm/min | a_p mm | a_e mm | Revolution n min^{-1} | Feed rate v_f mm/min | a_p mm | a_e mm |
| 0.2 | 0.4 | 66,879 | 669 | 0.300 | 0.010 | 55,732 | 557 | 0.300 | 0.010 | 33,439 | 301 | 0.300 | 0.008 |
| 0.3 | 0.6 | 44,586 | 446 | 0.450 | 0.015 | 37,155 | 372 | 0.450 | 0.015 | 22,293 | 201 | 0.450 | 0.012 |
| 0.4 | 0.8 | 38,217 | 382 | 0.600 | 0.020 | 27,866 | 279 | 0.600 | 0.020 | 16,720 | 150 | 0.600 | 0.016 |
| 0.5 | 1 | 38,217 | 382 | 0.750 | 0.025 | 25,478 | 255 | 0.750 | 0.025 | 15,287 | 138 | 0.750 | 0.020 |
| 0.6 | 1.2 | 41,401 | 662 | 0.900 | 0.030 | 26,539 | 425 | 0.900 | 0.030 | 15,924 | 229 | 0.900 | 0.024 |
| 0.7 | 1.4 | 35,487 | 568 | 1.050 | 0.035 | 29,572 | 473 | 1.050 | 0.035 | 17,743 | 256 | 1.050 | 0.028 |
| 0.8 | 1.6 | 33,439 | 535 | 1.200 | 0.040 | 25,876 | 414 | 1.200 | 0.040 | 15,525 | 224 | 1.200 | 0.032 |
| 0.9 | 1.8 | 33,970 | 544 | 1.350 | 0.045 | 24,770 | 396 | 1.350 | 0.045 | 14,862 | 214 | 1.350 | 0.036 |
| 1 | 2 | 38,217 | 764 | 1.500 | 0.050 | 25,478 | 510 | 1.500 | 0.050 | 15,287 | 275 | 1.500 | 0.040 |
| 1.5 | 3 | 28,025 | 561 | 2.250 | 0.150 | 21,231 | 425 | 2.250 | 0.150 | 12,739 | 229 | 2.250 | 0.135 |
| 2 | 6 | 21,019 | 631 | 3.000 | 0.200 | 17,516 | 525 | 3.000 | 0.200 | 10,510 | 284 | 3.000 | 0.180 |
| 2.5 | 8 | 16,815 | 504 | 3.750 | 0.250 | 14,013 | 420 | 3.750 | 0.250 | 8,408 | 227 | 3.750 | 0.225 |
| 3 | 8 | 15,287 | 611 | 4.500 | 0.300 | 11,677 | 467 | 4.500 | 0.300 | 7,006 | 252 | 4.500 | 0.270 |
| 3.5 | 10 | 13,103 | 524 | 5.250 | 0.350 | 10,919 | 437 | 5.250 | 0.350 | 6,551 | 236 | 5.250 | 0.315 |
| 4 | 11 | 11,465 | 573 | 6.000 | 0.400 | 9,554 | 478 | 6.000 | 0.400 | 5,732 | 258 | 6.000 | 0.360 |
| 4.5 | 11 | 10,191 | 510 | 6.750 | 0.450 | 8,493 | 425 | 6.750 | 0.450 | 5,096 | 229 | 6.750 | 0.405 |
| 5 | 13 | 9,172 | 550 | 7.500 | 0.500 | 7,643 | 459 | 7.500 | 0.500 | 4,586 | 248 | 7.500 | 0.450 |
| 5.5 | 13 | 8,338 | 500 | 8.250 | 0.550 | 6,948 | 417 | 8.250 | 0.550 | 4,169 | 225 | 8.250 | 0.495 |
| 6 | 13 | 7,643 | 459 | 9.000 | 0.600 | 6,369 | 382 | 9.000 | 0.600 | 3,822 | 206 | 9.000 | 0.540 |
| 7 | 16 | 6,551 | 459 | 10.500 | 0.700 | 5,460 | 382 | 10.500 | 0.700 | 3,276 | 206 | 10.500 | 0.630 |
| 8 | 19 | 5,732 | 401 | 12.000 | 0.800 | 4,777 | 334 | 12.000 | 0.800 | 2,866 | 181 | 12.000 | 0.720 |
| 9 | 19 | 5,096 | 408 | 13.500 | 0.900 | 4,246 | 340 | 13.500 | 0.900 | 2,548 | 183 | 13.500 | 0.810 |
| 10 | 22 | 4,586 | 459 | 15.000 | 1.000 | 3,822 | 382 | 15.000 | 1.000 | 2,293 | 206 | 15.000 | 0.900 |
| 12 | 26 | 3,822 | 459 | 18.000 | 1.200 | 3,185 | 382 | 18.000 | 1.200 | 1,911 | 206 | 18.000 | 1.080 |
| 16 | 35 | 2,866 | 401 | 24.000 | 1.600 | 2,389 | 334 | 24.000 | 1.600 | 1,433 | 181 | 24.000 | 1.440 |
| 20 | 40 | 2,293 | 367 | 30.000 | 2.000 | 1,911 | 306 | 30.000 | 2.000 | 1,146 | 165 | 30.000 | 1.800 |

| Tool dia. DC (mm) | Flute length APMX (mm) | Alloy steel (25~35HRC) P20, H13, L6 | | | | Pre-hardened steel (35~45HRC) P21 | | | | Hardened steel (45~52HRC) H13 | | | |
|-------------------------|------------------------------|---|------------------------------------|-------------|-------------|---|------------------------------------|-------------|-------------|-------------------------------------|------------------------------------|-------------|-------------|
| | | Revolution n min^{-1} | Feed rate v_f mm/min | a_p mm | a_e mm | Revolution n min^{-1} | Feed rate v_f mm/min | a_p mm | a_e mm | Revolution n min^{-1} | Feed rate v_f mm/min | a_p mm | a_e mm |
| 0.2 | 0.4 | 33,439 | 301 | 0.300 | 0.008 | 26,752 | 217 | 0.300 | 0.006 | 16,720 | 105 | 0.300 | 0.006 |
| 0.3 | 0.6 | 22,293 | 201 | 0.450 | 0.012 | 17,834 | 144 | 0.450 | 0.009 | 11,146 | 70 | 0.450 | 0.009 |
| 0.4 | 0.8 | 16,720 | 150 | 0.600 | 0.016 | 13,376 | 108 | 0.600 | 0.012 | 8,360 | 53 | 0.600 | 0.012 |
| 0.5 | 1 | 15,287 | 138 | 0.750 | 0.020 | 12,229 | 99 | 0.750 | 0.015 | 7,643 | 48 | 0.750 | 0.015 |
| 0.6 | 1.2 | 15,924 | 229 | 0.900 | 0.024 | 12,739 | 165 | 0.900 | 0.018 | 7,962 | 80 | 0.900 | 0.018 |
| 0.7 | 1.4 | 17,743 | 256 | 1.050 | 0.028 | 14,195 | 184 | 1.050 | 0.021 | 8,872 | 89 | 1.050 | 0.021 |
| 0.8 | 1.6 | 15,525 | 224 | 1.200 | 0.032 | 12,420 | 161 | 1.200 | 0.024 | 7,763 | 78 | 1.200 | 0.024 |
| 0.9 | 1.8 | 14,862 | 214 | 1.350 | 0.036 | 11,890 | 154 | 1.350 | 0.027 | 7,431 | 75 | 1.350 | 0.027 |
| 1 | 2 | 15,287 | 275 | 1.500 | 0.040 | 12,229 | 198 | 1.500 | 0.030 | 7,643 | 96 | 1.500 | 0.030 |
| 1.5 | 3 | 12,739 | 229 | 2.250 | 0.135 | 10,191 | 165 | 2.250 | 0.120 | 6,369 | 80 | 2.250 | 0.045 |
| 2 | 6 | 10,510 | 284 | 3.000 | 0.180 | 6,115 | 149 | 3.000 | 0.160 | 5,732 | 108 | 3.000 | 0.060 |
| 2.5 | 8 | 8,408 | 227 | 3.750 | 0.225 | 5,707 | 139 | 3.750 | 0.200 | 5,350 | 101 | 3.750 | 0.075 |
| 3 | 8 | 7,006 | 252 | 4.500 | 0.270 | 5,096 | 165 | 4.500 | 0.240 | 4,777 | 120 | 4.500 | 0.090 |
| 3.5 | 10 | 6,551 | 236 | 5.250 | 0.315 | 4,659 | 151 | 5.250 | 0.280 | 4,368 | 110 | 5.250 | 0.105 |
| 4 | 11 | 5,732 | 258 | 6.000 | 0.360 | 4,331 | 175 | 6.000 | 0.320 | 4,061 | 128 | 6.000 | 0.120 |
| 4.5 | 11 | 5,096 | 229 | 6.750 | 0.405 | 4,076 | 165 | 6.750 | 0.360 | 3,822 | 120 | 6.750 | 0.135 |
| 5 | 13 | 4,586 | 248 | 7.500 | 0.450 | 3,873 | 188 | 7.500 | 0.400 | 3,631 | 137 | 7.500 | 0.150 |
| 5.5 | 13 | 4,169 | 225 | 8.250 | 0.495 | 3,706 | 180 | 8.250 | 0.440 | 3,474 | 131 | 8.250 | 0.165 |
| 6 | 13 | 3,822 | 206 | 9.000 | 0.540 | 3,397 | 165 | 9.000 | 0.480 | 3,185 | 120 | 9.000 | 0.180 |
| 7 | 16 | 3,276 | 206 | 10.500 | 0.630 | 2,912 | 165 | 10.500 | 0.560 | 2,730 | 120 | 10.500 | 0.210 |
| 8 | 19 | 2,866 | 181 | 12.000 | 0.720 | 2,548 | 144 | 12.000 | 0.640 | 2,389 | 105 | 12.000 | 0.240 |
| 9 | 19 | 2,548 | 183 | 13.500 | 0.810 | 2,265 | 147 | 13.500 | 0.720 | 2,123 | 107 | 13.500 | 0.270 |
| 10 | 22 | 2,293 | 206 | 15.000 | 0.900 | 2,038 | 165 | 15.000 | 0.800 | 1,911 | 120 | 15.000 | 0.300 |
| 12 | 26 | 1,911 | 206 | 18.000 | 1.080 | 1,699 | 165 | 18.000 | 0.960 | 1,592 | 120 | 18.000 | 0.360 |
| 16 | 35 | 1,433 | 181 | 24.000 | 1.440 | 1,274 | 144 | 24.000 | 1.280 | 1,194 | 105 | 24.000 | 0.480 |
| 20 | 40 | 1,146 | 165 | 30.000 | 1.800 | 1,019 | 132 | 30.000 | 1.600 | 955 | 96 | 30.000 | 0.600 |

- [Note]**
- ① PN Coating is less electro conductive. Therefore, electric transmitted measuring systems may not work.
 - ② The cutting conditions given above is applied to 2 flutes type end mills. As for 4 flutes type, increase the feed rate by 1.5 times.
 - ③ Use a highly rigid and accurate machine as possible.
 - ④ Use the appropriate coolant for the work material and machining shape.
 - ⑤ These conditions are for general guidance; in actual machining conditions adjust the parameters according to your actual machine and work-piece conditions.
 - ⑥ If the rpm available is lower than that recommended please reduce the feed rate to the same ratio.

HGOS2-PN

Slotting



| Tool dia. DC (mm) | Flute length APMX (mm) | Copper alloy, Aluminium alloy | | | Cast iron, Carbon steel (150~200HB) No.35 B, 1050, 1055 | | | Stainless steel (25~35HRC) 304, 316 | | |
|-------------------------|------------------------------|-------------------------------------|------------------------------------|-------------|---|------------------------------------|-------------|---|------------------------------------|-------------|
| | | Revolution n min^{-1} | Feed rate v_f mm/min | a_p mm | Revolution n min^{-1} | Feed rate v_f mm/min | a_p mm | Revolution n min^{-1} | Feed rate v_f mm/min | a_p mm |
| 0.2 | 0.4 | 58,678 | 235 | 0.01 | 53,344 | 213 | 0.01 | 37,341 | 157 | 0.01 |
| 0.3 | 0.6 | 39,119 | 156 | 0.02 | 35,563 | 142 | 0.02 | 24,894 | 120 | 0.02 |
| 0.4 | 0.8 | 35,032 | 140 | 0.02 | 26,672 | 107 | 0.02 | 22,293 | 103 | 0.02 |
| 0.5 | 1 | 31,529 | 126 | 0.03 | 25,478 | 102 | 0.03 | 20,064 | 103 | 0.03 |
| 0.6 | 1.2 | 32,113 | 180 | 0.03 | 23,885 | 191 | 0.03 | 20,435 | 143 | 0.03 |
| 0.7 | 1.4 | 30,027 | 240 | 0.04 | 25,023 | 200 | 0.04 | 19,108 | 161 | 0.04 |
| 0.8 | 1.6 | 28,463 | 228 | 0.04 | 23,885 | 191 | 0.04 | 18,113 | 152 | 0.04 |
| 0.9 | 1.8 | 27,247 | 218 | 0.05 | 23,001 | 184 | 0.05 | 17,339 | 143 | 0.05 |
| 1 | 2 | 28,025 | 215 | 0.05 | 22,293 | 175 | 0.05 | 17,834 | 125 | 0.05 |
| 1.5 | 3 | 21,019 | 210 | 0.08 | 16,985 | 170 | 0.08 | 12,739 | 115 | 0.08 |
| 2 | 6 | 15,764 | 189 | 0.12 | 14,331 | 172 | 0.12 | 8,917 | 96 | 0.12 |
| 2.5 | 8 | 12,611 | 151 | 0.18 | 11,465 | 138 | 0.18 | 7,643 | 83 | 0.18 |
| 3 | 8 | 11,677 | 163 | 0.30 | 9,554 | 134 | 0.30 | 6,794 | 86 | 0.30 |
| 3.5 | 10 | 10,009 | 140 | 0.35 | 9,099 | 127 | 0.35 | 6,187 | 78 | 0.35 |
| 4 | 11 | 8,758 | 140 | 0.60 | 7,962 | 127 | 0.60 | 5,732 | 83 | 0.60 |
| 4.5 | 11 | 7,785 | 125 | 0.90 | 7,077 | 113 | 0.90 | 4,034 | 58 | 0.90 |
| 5 | 13 | 7,006 | 140 | 1.25 | 6,369 | 127 | 1.25 | 3,822 | 69 | 1.25 |
| 5.5 | 13 | 6,369 | 127 | 1.38 | 5,790 | 116 | 1.38 | 3,648 | 66 | 1.38 |
| 6 | 13 | 5,839 | 160 | 1.80 | 5,308 | 150 | 1.80 | 3,503 | 90 | 1.80 |
| 7 | 16 | 5,005 | 200 | 2.45 | 4,550 | 182 | 2.45 | 3,139 | 113 | 2.45 |
| 8 | 19 | 4,379 | 215 | 3.20 | 3,981 | 200 | 3.20 | 1,672 | 125 | 3.20 |
| 9 | 19 | 3,892 | 234 | 4.05 | 3,539 | 212 | 4.05 | 1,486 | 146 | 4.05 |
| 10 | 22 | 3,503 | 210 | 5.00 | 3,185 | 191 | 5.00 | 1,338 | 134 | 5.00 |
| 12 | 26 | 2,919 | 234 | 6.00 | 2,654 | 212 | 6.00 | 1,115 | 103 | 6.00 |
| 16 | 35 | 2,189 | 219 | 8.00 | 1,990 | 199 | 8.00 | 975 | 100 | 8.00 |
| 20 | 40 | 1,752 | 210 | 10.00 | 1,592 | 191 | 10.00 | 836 | 103 | 10.00 |


| Tool dia. DC (mm) | Flute length APMX (mm) | Alloy steel (25~35HRC) P20, H13, L6 | | | Pre-hardened steel (35~45HRC) P21 | | | Hardened steel (45~52HRC) H13 | | |
|-------------------------|------------------------------|---|------------------------------------|-------------|---|------------------------------------|-------------|-------------------------------------|------------------------------------|-------------|
| | | Revolution n min^{-1} | Feed rate v_f mm/min | a_p mm | Revolution n min^{-1} | Feed rate v_f mm/min | a_p mm | Revolution n min^{-1} | Feed rate v_f mm/min | a_p mm |
| 0.2 | 0.4 | 24,005 | 122 | 0.01 | 14,936 | 56 | 0.01 | 8,402 | 34 | 0.01 |
| 0.3 | 0.6 | 16,003 | 109 | 0.02 | 9,958 | 50 | 0.01 | 5,601 | 30 | 0.01 |
| 0.4 | 0.8 | 14,331 | 103 | 0.02 | 8,917 | 56 | 0.02 | 5,016 | 34 | 0.02 |
| 0.5 | 1 | 12,898 | 93 | 0.03 | 8,025 | 51 | 0.02 | 4,514 | 31 | 0.02 |
| 0.6 | 1.2 | 13,137 | 112 | 0.03 | 8,174 | 51 | 0.03 | 4,598 | 31 | 0.02 |
| 0.7 | 1.4 | 12,284 | 125 | 0.04 | 7,643 | 58 | 0.03 | 4,299 | 35 | 0.03 |
| 0.8 | 1.6 | 11,644 | 119 | 0.04 | 7,245 | 55 | 0.04 | 4,075 | 33 | 0.03 |
| 0.9 | 1.8 | 11,146 | 133 | 0.05 | 6,936 | 61 | 0.04 | 3,901 | 37 | 0.04 |
| 1 | 2 | 11,465 | 125 | 0.05 | 7,134 | 58 | 0.05 | 4,013 | 35 | 0.04 |
| 1.5 | 3 | 9,554 | 114 | 0.08 | 5,945 | 52 | 0.07 | 3,344 | 32 | 0.06 |
| 2 | 6 | 7,166 | 122 | 0.12 | 4,459 | 56 | 0.11 | 2,508 | 34 | 0.10 |
| 2.5 | 8 | 5,732 | 97 | 0.18 | 3,567 | 45 | 0.16 | 2,006 | 27 | 0.14 |
| 3 | 8 | 4,777 | 81 | 0.30 | 2,972 | 37 | 0.27 | 1,672 | 23 | 0.24 |
| 3.5 | 10 | 4,095 | 104 | 0.35 | 2,548 | 48 | 0.32 | 1,433 | 29 | 0.28 |
| 4 | 11 | 3,583 | 91 | 0.60 | 2,229 | 42 | 0.54 | 1,254 | 26 | 0.49 |
| 4.5 | 11 | 3,185 | 92 | 0.90 | 1,982 | 50 | 0.81 | 1,115 | 30 | 0.73 |
| 5 | 13 | 2,866 | 103 | 1.25 | 1,783 | 45 | 1.13 | 1,003 | 27 | 1.01 |
| 5.5 | 13 | 2,606 | 89 | 1.38 | 1,621 | 41 | 1.24 | 912 | 25 | 1.11 |
| 6 | 13 | 2,389 | 105 | 1.80 | 1,486 | 48 | 1.62 | 836 | 30 | 1.46 |
| 7 | 16 | 2,047 | 122 | 2.45 | 1,274 | 56 | 2.21 | 717 | 34 | 1.98 |
| 8 | 19 | 1,075 | 120 | 3.20 | 669 | 54 | 2.88 | 376 | 33 | 2.59 |
| 9 | 19 | 955 | 114 | 4.05 | 594 | 52 | 3.65 | 334 | 32 | 3.28 |
| 10 | 22 | 860 | 117 | 5.00 | 535 | 54 | 4.50 | 301 | 33 | 4.05 |
| 12 | 26 | 717 | 110 | 6.00 | 446 | 51 | 5.40 | 251 | 31 | 4.86 |
| 16 | 35 | 627 | 107 | 8.00 | 390 | 49 | 7.20 | 219 | 30 | 6.48 |
| 20 | 40 | 537 | 100 | 10.00 | 334 | 51 | 9.00 | 188 | 31 | 8.10 |

[Note] The 4 flutes not suitable for slotting.


Recommended Cutting Conditions (Metric)

HGOSH4-TH

Side milling



| Work Material (Hardness) | Cutting range | Depth of cut mm | Cutting conditions | Tool dia. DC (mm) | | | | | | | | |
|--|---------------|--------------------|-------------------------------------|-------------------|--------|--------|--------|--------|-------|-------|-------|-------|
| | | | | φ1 | φ1.5 | φ2 | φ3 | φ4 | φ6 | φ8 | φ10 | φ12 |
| Carbon steel Alloy Steel (200~250HB) 1050 | High speed | $a_p=1.5DC$ | Revolution n (min ⁻¹) | 47,800 | 31,800 | 23,800 | 16,000 | 12,000 | 8,000 | 6,000 | 4,800 | 4,000 |
| | | $a_e=0.1DC$ | Feed rate v_f (mm/min) | 1,500 | 1,600 | 1,700 | 1,800 | 1,900 | 2,200 | 2,400 | 2,200 | 2,100 |
| | General | $a_p=1.5DC$ | Revolution n (min ⁻¹) | 28,600 | 19,100 | 14,300 | 9,600 | 7,200 | 4,800 | 3,600 | 2,900 | 2,400 |
| | | $a_e=0.15DC$ | Feed rate v_f (mm/min) | 690 | 760 | 830 | 860 | 920 | 1,080 | 1,150 | 1,070 | 1,000 |
| Alloy steel P20 | High speed | $a_p=1.5DC$ | Revolution n (min ⁻¹) | 41,400 | 27,600 | 20,700 | 14,000 | 10,000 | 6,900 | 5,200 | 4,100 | 3,500 |
| | | $a_e=0.05DC$ | Feed rate v_f (mm/min) | 1,160 | 1,330 | 1,330 | 1,400 | 1,400 | 1,700 | 1,900 | 1,700 | 1,600 |
| | General | $a_p=1.5DC$ | Revolution n (min ⁻¹) | 28,600 | 19,100 | 14,300 | 9,600 | 7,200 | 4,800 | 3,600 | 2,900 | 2,400 |
| | | $a_e=0.1DC$ | Feed rate v_f (mm/min) | 580 | 690 | 740 | 770 | 830 | 970 | 1,040 | 960 | 900 |
| Pre-hardened steel (35~45HRC) P21 | High speed | $a_p=1.5DC$ | Revolution n (min ⁻¹) | 35,000 | 23,300 | 17,500 | 12,000 | 8,800 | 5,800 | 4,400 | 3,500 | 2,900 |
| | | $a_e=0.05DC$ | Feed rate v_f (mm/min) | 700 | 930 | 980 | 1,100 | 1,100 | 1,300 | 1,400 | 1,300 | 1,200 |
| | General | $a_p=1.5DC$ | Revolution n (min ⁻¹) | 25,500 | 17,000 | 12,700 | 8,500 | 6,400 | 4,200 | 3,200 | 2,500 | 2,100 |
| | | $a_e=0.07DC$ | Feed rate v_f (mm/min) | 460 | 510 | 560 | 610 | 660 | 750 | 820 | 740 | 700 |
| Hardened steel (45~55HRC) H13 | High speed | $a_p=1.5DC$ | Revolution n (min ⁻¹) | 31,800 | 21,200 | 15,900 | 11,000 | 8,000 | 5,300 | 4,000 | 3,200 | 2,700 |
| | | $a_e=0.02DC$ | Feed rate v_f (mm/min) | 640 | 760 | 830 | 860 | 900 | 1,040 | 1,120 | 1,030 | 980 |
| | General | $a_p=1.5DC$ | Revolution n (min ⁻¹) | 22,300 | 14,800 | 11,100 | 7,400 | 5,600 | 3,700 | 2,800 | 2,200 | 1,900 |
| | | $a_e=0.05DC$ | Feed rate v_f (mm/min) | 360 | 410 | 440 | 460 | 500 | 580 | 630 | 570 | 550 |



Slotting

| Work Material (Hardness) | Cutting range | Depth of cut mm | Cutting conditions | Tool dia. DC (mm) | | | | | | | | |
|--|---------------|--------------------|-------------------------------------|-------------------|--------|--------|-------|-------|-------|-------|-------|-------|
| | | | | φ1 | φ1.5 | φ2 | φ3 | φ4 | φ6 | φ8 | φ10 | φ12 |
| Carbon steel Alloy Steel (200~250HB) 1050 | High speed | $a_p \leq 0.5DC$ | Revolution n (min ⁻¹) | 25,500 | 17,000 | 12,700 | 8,500 | 6,400 | 4,200 | 3,200 | 2,500 | 2,100 |
| | | $a_e=1DC$ | Feed rate v_f (mm/min) | 720 | 750 | 810 | 820 | 920 | 1,010 | 1,090 | 950 | 880 |
| | General | $a_p \leq 1DC$ | Revolution n (min ⁻¹) | 19,100 | 12,700 | 9,500 | 6,400 | 4,800 | 3,200 | 2,400 | 1,900 | 1,600 |
| | | $a_e=1DC$ | Feed rate v_f (mm/min) | 380 | 430 | 450 | 490 | 550 | 610 | 650 | 580 | 540 |
| Alloy steel P20 | High speed | | Revolution n (min ⁻¹) | | | | | | | | | |
| | | | Feed rate v_f (mm/min) | | | | | | | | | |
| | General | $a_p \leq 0.5DC$ | Revolution n (min ⁻¹) | 19,100 | 12,700 | 9,500 | 6,400 | 4,800 | 3,200 | 2,400 | 1,900 | 1,600 |
| | | $a_e=0.1DC$ | Feed rate v_f (mm/min) | 340 | 380 | 400 | 440 | 500 | 550 | 590 | 520 | 480 |
| Pre-hardened steel (35~45HRC) P21 | High speed | | Revolution n (min ⁻¹) | | | | | | | | | |
| | | | Feed rate v_f (mm/min) | | | | | | | | | |
| | General | $a_p \leq 0.5DC$ | Revolution n (min ⁻¹) | 17,500 | 11,700 | 8,800 | 5,800 | 4,400 | 2,900 | 2,200 | 1,800 | 1,500 |
| | | $a_e=1DC$ | Feed rate v_f (mm/min) | 280 | 300 | 330 | 360 | 410 | 450 | 480 | 440 | 400 |
| Hardened steel (45~55HRC) H13 | High speed | | Revolution n (min ⁻¹) | | | | | | | | | |
| | | | Feed rate v_f (mm/min) | | | | | | | | | |
| | General | $a_p \leq 0.2DC$ | Revolution n (min ⁻¹) | 16,000 | 10,600 | 8,000 | 5,300 | 4,000 | 2,700 | 2,000 | 1,600 | 1,300 |
| | | $a_e=1DC$ | Feed rate v_f (mm/min) | 190 | 210 | 240 | 240 | 280 | 310 | 330 | 290 | 260 |

[Note]

- ① Use the high-rigidity and high accuracy machine as possible
- ② These Recommended Cutting Conditions indicate only the rule of a thumb for the cutting conditions. In actual machining, the condition should be adjusted according to the machining shape, purpose and the machine type.
- ③ If the rpm available is lower than that recommended please reduce the feed rate to the same ratio.



Safety notes

1. Cautions regarding handling

- (1) When removing the tool from its case (packaging), be careful that the tool does not pop out or is dropped. Be particularly careful regarding contact with the tool flutes.
- (2) When handling tools with sharp cutting flutes, be careful not to touch the cutting flutes directly with your bare hands.

2. Cautions regarding mounting

- (1) Before use, check the outside appearance of the tool for scratches, cracks, etc. and that it is firmly mounted in the collet chuck, etc.
- (2) If abnormal chattering, etc. occurs during use, stop the machine immediately and remove the cause of the chattering.

3. Cautions during use

- (1) Before use, confirm the dimensions and direction of rotation of the tool and milling work material.
- (2) The numerical values in the standard cutting conditions table should be used as criteria when starting new work. The cutting conditions should be adjusted as appropriate when the cutting depth is large, the rigidity of the machine being used is low, or according to the conditions of the work material.
- (3) Cutting tools are made of a hard material. During use, they may break and fly off. In addition, cutting chips may also fly off. Since there is a danger of injury to workers, fire, or eye damage from such flying pieces, a safety cover should be attached when work is performed and safety equipment such as safety goggles should be worn to create a safe environment for work.
- (4) There is a risk of fire or inflammation due to sparks, heat due to breakage, and cutting chips. Do not use where there is a risk of fire or explosion. **Please caution of fire while using oil base coolant, fire prevention is necessary.**
- (5) Do not use the tool for any purpose other than that for which it is intended.

4. Cautions regarding regrinding

- (1) If regrinding is not performed at the proper time, there is a risk of the tool breaking. Replace the tool with one in good condition, or perform regrinding.
- (2) Grinding dust will be created when regrinding a tool. When regrinding, be sure to attach a safety cover over the work area and wear safety clothes such as safety goggles, etc.
- (3) This product contains the specified chemical substance cobalt and its inorganic compounds. When performing regrinding or similar processing, be sure to handle the processing in accordance with the local laws and regulations regarding prevention of hazards due to specified chemical substances.

Notes

Lined writing area consisting of multiple horizontal lines for notes.

California Office [Headquarters]

3535 Hyland Avenue, Suite 200
Costa Mesa, CA 92626
Customer Service: 800.523.0800
Technical Service: 800.486.2341

Toronto Office [Canada Branch]

3535 Laird Road
Units 15 & 16
Mississauga, Ontario, Canada L5L 5Y7
Main: 905.814.0240
Fax: 905.814.0245

Chicago Office [Engineering]

300 N. Martingale Road, Suite 500
Schaumburg, IL 60173
Main: 847.252.6300
Fax: 847.519.1732

Detroit Office [MOLDINO Products Customer Service]

41700 Gardenbrook Road, Suite 120 Novi, MI 48375
Customer Service: 833.924.3100
Main: 248.308.2620
Fax: 248.308.2627
Email: rfqHTdiv@mmus.com (MOLDINO Product & Technical Inquiry)

MMC Metal de Mexico, S.A. DE C.V.

Av. La Cañada No.16,
Parque Industrial Bernardo
Quintana, El Marques,
Queretaro C.P. 76246 MEXICO
Main: +52.442.221.61.36
Fax: +52.442.221.61.34

North Carolina-MTEC [Marketing & Technical Center]

105 Corporate Center Drive, Suite A
 Mooresville, NC 28117
Main: 980.312.3100
Fax: 704.746.9292

DISTRIBUTED BY:

MOLDINO Tool Engineering, Ltd.

www.moldino.com/en-US/

(Manufacturer)

2022 1st Edition

No. H2205A-1

Tools Specifications subject to change without notice.